
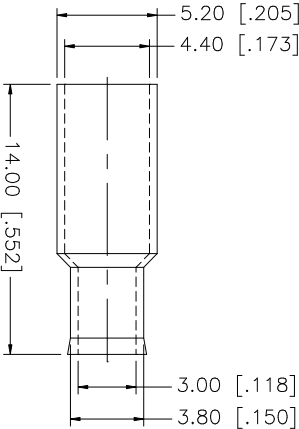

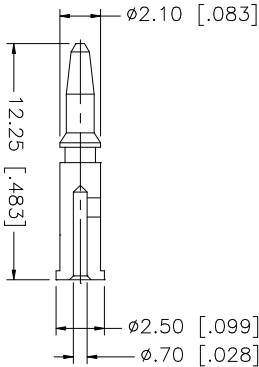
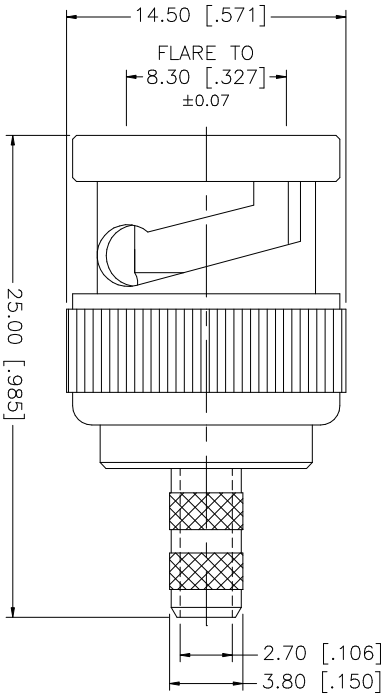


REV.	DATE	DESCRIPTION
A	02/28/02	MODIFY CONTACT PIN AND BODY LENGTH
B	04/04/03	UPDATE DRAWING FORMAT

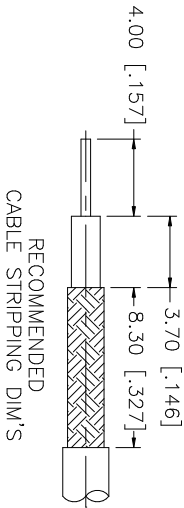

- CRIMP NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex					
7				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN	G.R.S.		04/04/03				
6				0.5 – 8mm ± 0.20mm	CHECKED							
5	FERRULE	COPPER	1	8 – 30mm ± 0.40mm	ISSUED							
4	SLEEVE	DELRI	1	30 – 120mm ± 0.50mm	SHEET	1 OF 1						
3	CONTACT PIN	BRASS	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	PART DESCRIPTION			112132				
2	INSULATOR	DELRI	1	.020 – .315 = ± 0.007"	BNC CRIMP PLUG – 50 ohms							
1	SHELL/BODY	BRASS	1	.315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	(RG 174/U, 188/U, 316/U CABLE)							
DESCRIPTION				MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	DWG. NO.	REV.	SIZE	SCALE
								C:/112/112132.DWG	112132.DWG	B	A	NA