
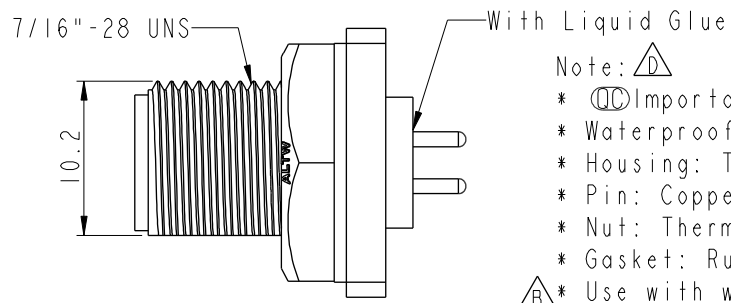
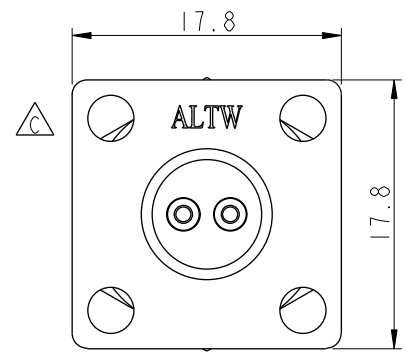
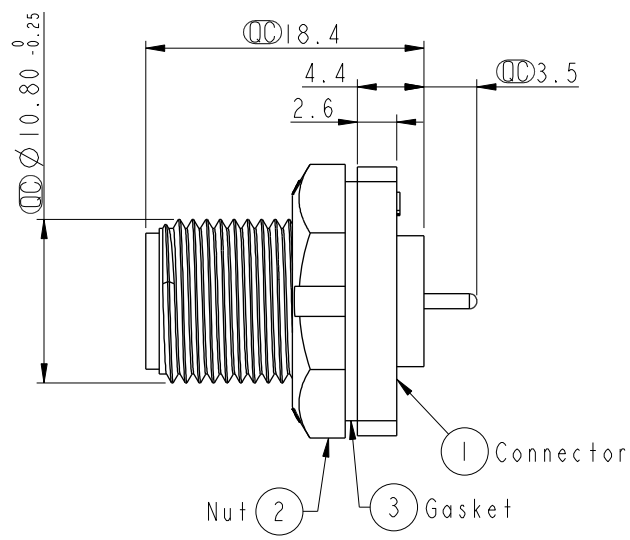


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8A0093	2008/09/05	Shin	Add Notes
C	LEN1640061	2016/03/30	Vicky	Update Logo
D	CI90268	2019/02/18	Ruru	Modify Note

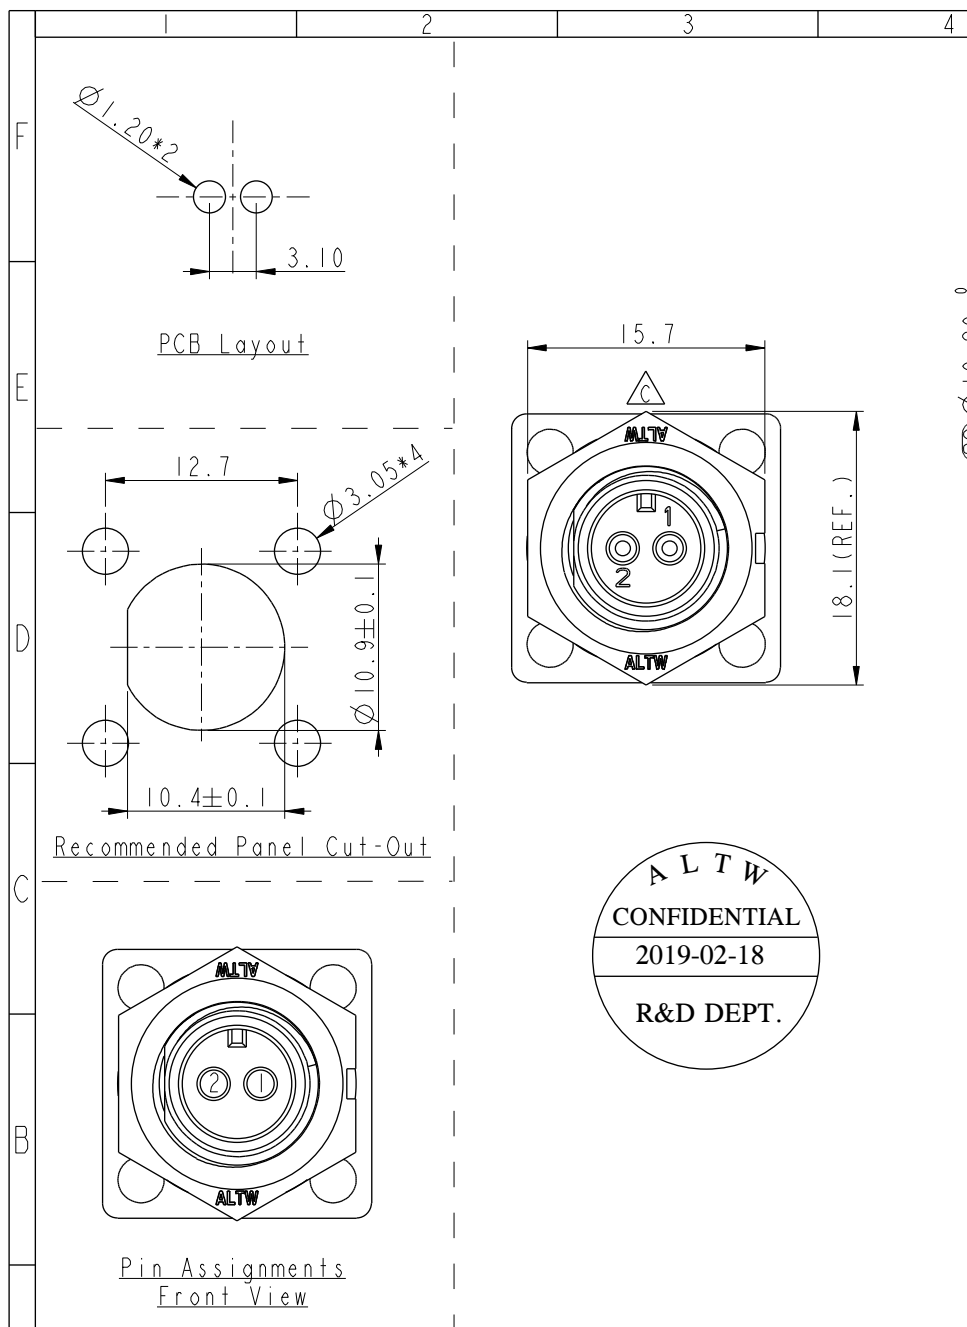

- Note: $\triangle$
- * ϕ Important Dimension To Check
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - $\triangle$ * Use with waterproof cap or dust cap
Panel thickness max: 4.0mm
 - $\triangle$ * Use without waterproof cap or dust cap
Panel thickness max: 5.0mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE		Mini		ITEM NO		DRAWN BY		DATE	
				Panel Screw 2Pin M Conn. M Pin		AD-02PMMP-SS7001		Ruru		2019-02-18	
TOLERANCE		SCALE		SIZE		DWG NO		CHECKED BY		DATE	
.X ± 0.25		2:1		A4		AD-02PMMP-SS7001		Rita		2019-02-18	
.XX ± 0.1		REV.		WC-REV.		CUSTOMER		APPROVED BY		DATE	
.XXX ± 0.05		D		A.2		ALTW		Max		2019-02-18	
ANGLES $\pm 1^\circ$				ϕ Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司