

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

## REVISIONS



| P | LTR | DESCRIPTION     | DATE      | DWN | APVD |
|---|-----|-----------------|-----------|-----|------|
|   | A   | INITIAL RELEASE | 23AUG2017 | YC  | CW   |
|   |     |                 |           |     |      |
|   |     |                 |           |     |      |

## NOTES:

- TECHNICAL CHARACTERISTICS:  
INSULATION MATERIAL: PC  
RATED VOLTAGE: 250 V  
RATED CURRENT: 10 A  
INSULATION RESISTANCE:  $\geq 400M\Omega$   
RATED IMPULSE VOLTAGE: 2.5 KV  
POLLUTION DEGREE: 2  
FLAMMABILITY: UL94V-0  
MATING CYCLES: 500 CYCLES  
WIRE RANGE: 0.14-2.5 mm<sup>2</sup> (26-14 AWG)  
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.  
(ORDER No. REFER TO DRAWING: T20200X20XX000)

## 注释:






- 技术参数:  
绝缘材料: PC  
额定电压: 250V  
额定电流: 10A  
绝缘电阻:  $\geq 400M\Omega$   
额定脉冲电压: 2.5 KV  
污染等级: 2  
阻燃等级: UL94V-0  
插拔次数: 500次  
接线范围: 0.14-2.5 mm<sup>2</sup> (26-14 AWG)  
接线类型: 冷压接
- 端子需要单独订购.  
(订货号参考图面: T20200X20XX000)

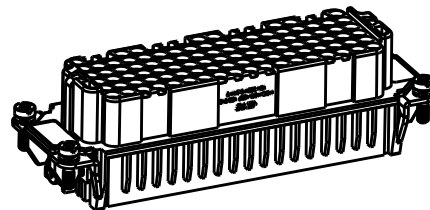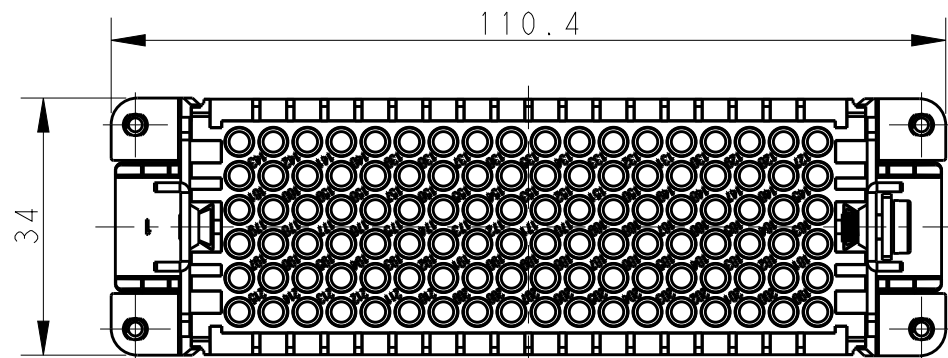

SCALE 1:2

M4 SCREW  
RECOMMENDED TIGHTENING TORQUE 1.2N.m  
M4螺丝, 推荐拧紧力矩 1.2N.m

4X M3 SCREW  
RECOMMENDED TIGHTENING TORQUE 0.5N.m  
4X M3螺丝, 推荐拧紧力矩 0.5N.m

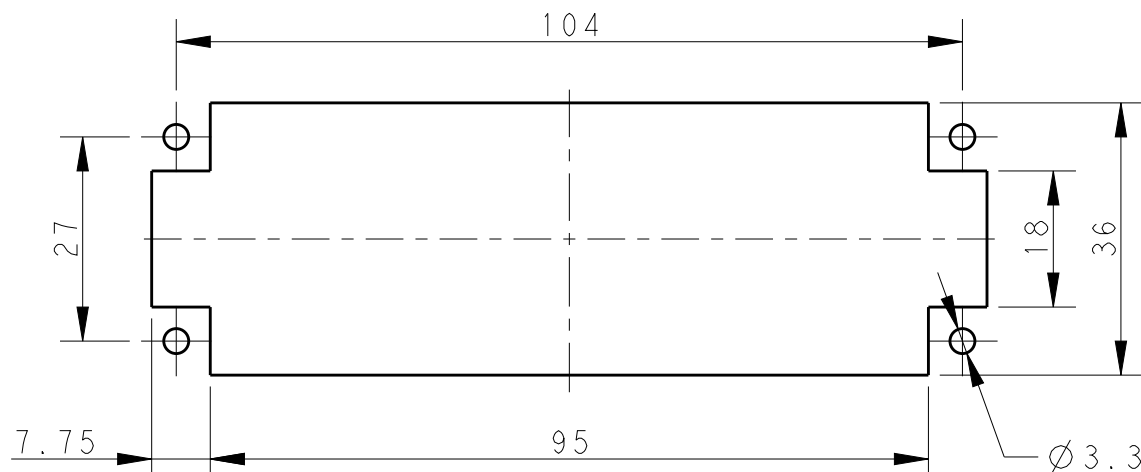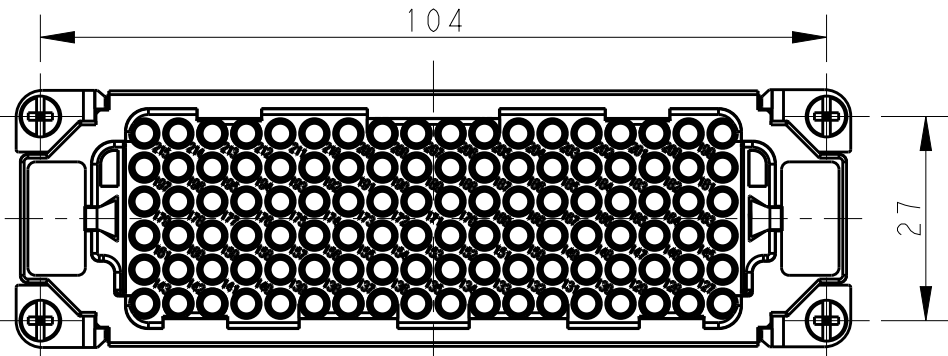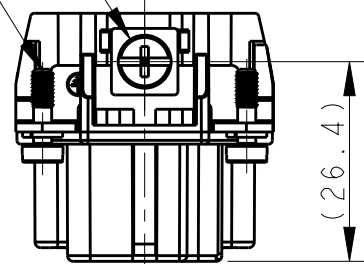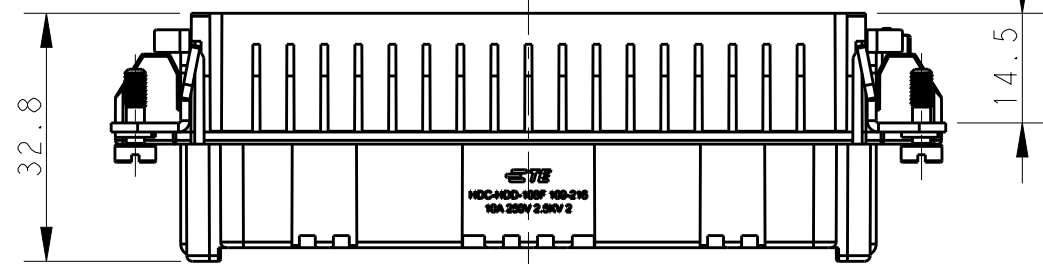


PANEL CUT OUT FOR INSERTS FOR USING  
WITHOUT HOODS/HOUSINGS  
不使用防护外壳时平面开孔尺寸

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:

0 PLC ±  
1 PLC ±  
2 PLC ±  
3 PLC ±  
4 PLC ±  
ANGLES ±

MATERIAL

FINISH

DWN

YORK CHEN

CHK

GINO YAO

APVD

CHRIS WANG

PRODUCT SPEC

108-137043

APPLICATION SPEC

114-137043

WEIGHT

-

CUSTOMER DRAWING

T2032162201-007

PART NUMBER

料号

HDD-108-F  
109-216HDD-108 FEMALE INSERT 109-216  
HDD-108 母插 109-216

PART DESCRIPTION

产品描述

TE Connectivity

NAME

HDD-108-F 109-216

SIZE

A3

CAGE CODE

-

DRAWING NO

T2032162201007

RESTRICTED TO

-

SCALE

1:1

SHEET

1 OF 1

REV

A