


This document is the property of Amphenol Corporation and is delivered on the basis of a license, for manufacturing or resale by anyone other than Amphenol Corporation, is prohibited. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage or retrieval system, without the prior written permission of Amphenol Corporation. For more information, see the document.

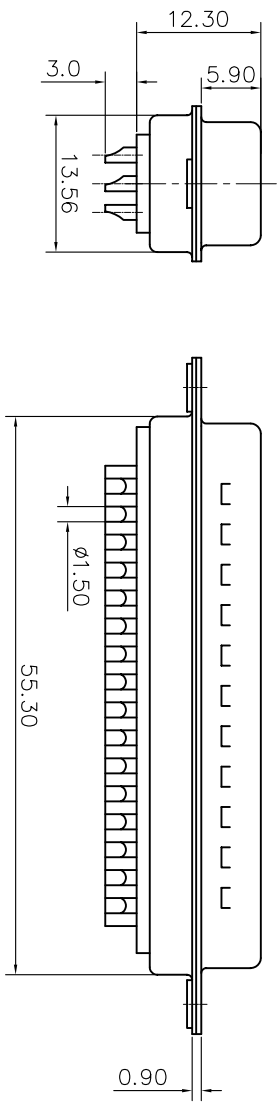


REVISONS			
REV.	DESCRIPTION	DATE	APPROVED
A		07/11/07	

D-SUB TECHNICAL DATA

SHELL : Steel, 2.5um (100u") min tin over 1.25um (50u") min nickel
 BODY : Glass filled thermoplastic.
 Flame retardant to UL94 V-0
 CONTACTS : brass.
 0.76um(30u") min gold over 0.25um(10u") min nickel
 ELECTRICAL : Voltage rating :1000 V RMS at 50 Hz
 Current rating 5A.
 Insulation resistance >1000 M Ohms
 Contact resistance 20 mOhms max.
 CLIMATIC : Temperature range -55 °C up to 125°C
 MARKING : Amphenol...(Series No.)
 Commercial reference
 Manufacturing date

PRODUCT CODE

L 717 SD D 50 P C309

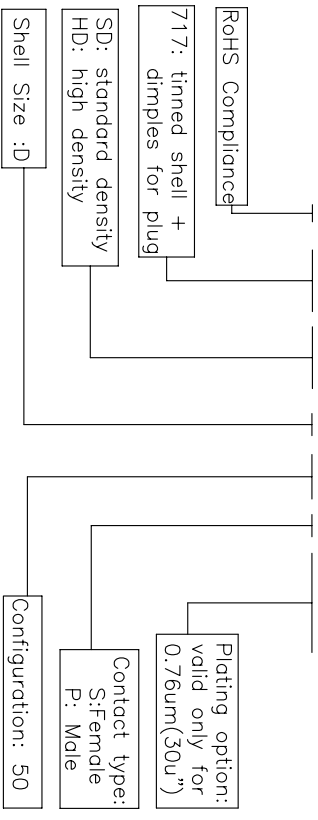

UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE	
U.S.	METRIC	DRAWN	Issue	BY	DATE
±	0.50	7/7/07	7/7/07	7/7/07	
±	0.30	CHECKED	14. using	7/7/07	
±	0.20				
TOLERANCES FRACTIONS ±/± ANGLES ±/± DIMENSIONS U.S. INCHES MM					

