


This document is the property of Amphenol Corporation and is delivered on the understanding that it is not to be reproduced, stored in a retrieval system or used in any way for manufacturing or sales by anyone other than Amphenol Corporation. Amphenol Corporation reserves the right to make changes or to use any information in this document.

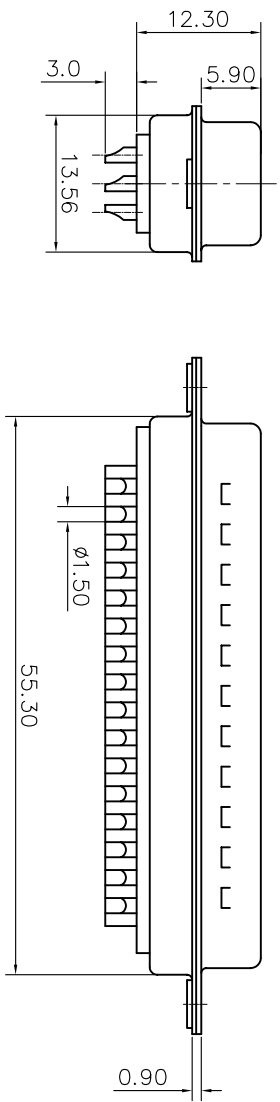


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A		07/11/07	

**D-SUB TECHNICAL DATA**

SHELL : Steel, 2.5um (100u") min tin over 1.25um (50u") min nickel  
 BODY : Glass filled thermoplastic.  
 Flame retardant to UL94 V-0  
 CONTACTS : brass.  
 0.76um(30u") min gold over 0.65um(25u") min nickel  
 ELECTRICAL : Voltage rating :1000 V RMS at 50 Hz  
 Current rating 5A.  
 Insulation resistance >1000 M Ohms  
 Contact resistance 20 mOhms max.  
 CLIMATIC : Temperature range -55 °C up to 125°C  
 MARKING : Amphenol...(Series No.)  
 Commercial reference  
 Manufacturing date

**PRODUCT CODE**

**L 717 SD D 50 P C309**

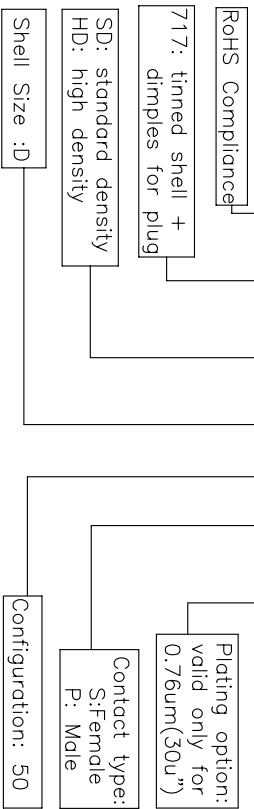


Amphenol

Stamped and Formed connector, SD series

UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE	
TOLEANCES	METRIC	DRAWN	Iss: jmg	07/11/07	
U.S.	0.50	CHECKED	14: wmg	07/11/07	
X: +/-	0.30				
XX: +/-	0.20				
XXX: +/-					
FRACTIONS +/-					
ANGLES +/-	2°				

FOR MATERIALS AND FINISHES  
 REMOVE SHARP EDGES  
 SEE NOTES



SIZE	DRAWING NO.	SCALE	SHEET	OF	REV.
A4	C L717SDD50PC309	NONE	1	1	A



4

3

2

1