


This document is the property of Amphenol Corporation and is loaned to the customer for use in the design and manufacture of products. It is not to be used for any other purpose, and its use is limited to the specific application for which it was intended. Amphenol Corporation reserves the right to modify or discontinue this document at any time without notice. For more information, see the document "Amphenol Corporation's Policy on Intellectual Property" or for any other information, see the document "Amphenol Corporation's Policy on Confidentiality".

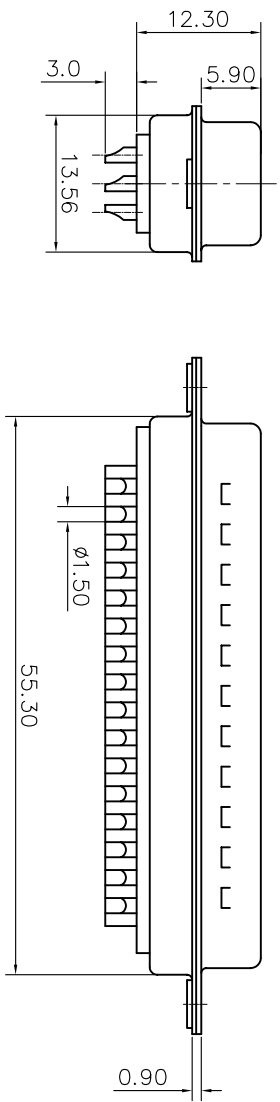


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A		07/11/07	

**D-SUB TECHNICAL DATA**

SHELL : Steel, 2.5um (100u") min tin over 1.25um (50u") min nickel  
 BODY : Glass filled thermoplastic.  
 Flame retardant to UL94 V-0  
 CONTACTS : brass.  
 0.76um(30u") min gold over 0.05um(2u") min nickel  
 ELECTRICAL : Voltage rating :1000 V RMS at 50 Hz  
 Current rating 5A.  
 Insulation resistance >1000 M Ohms  
 Contact resistance 20 mOhms max.  
 CLIMATIC : Temperature range -55 °C up to 125°C  
 MARKING : Amphenol...(Series No.)  
 Commercial reference  
 Manufacturing date

**PRODUCT CODE**

**L 717 SD D 50 P C309**

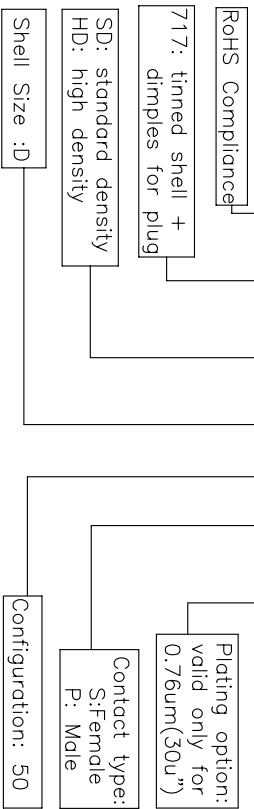

UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE	
TOLERANCES		DRAWN	Iss. by	7/7/07	7/7/07
U.S.	METRIC	CHECKED	146.using	7/7/07	7/7/07
X	±0.50				
XX	±0.30				
XXX	±0.20				
FRACTIONS	±1/16				
ANGLES	±1°				
FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES					
DIMENSIONS					
U.S.	DIMENSIONS		ANGLE OF PROJECTION		
MM	MM				
TITLE					
Stamped and Formed connector, SD series					
SIZE		DRAWING NO.		REV.	
A4		C L717SDD50PC309		A	
SCALE		NONE		SHEET 1 OF 1	

1 2 3 4

A B C D