


This document is the property of Amphenol Corporation and is delivered on the understanding that it is not to be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without the prior written permission of Amphenol Corporation. No part of this document may be reproduced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without the prior written permission of Amphenol Corporation. For more information, see the document.

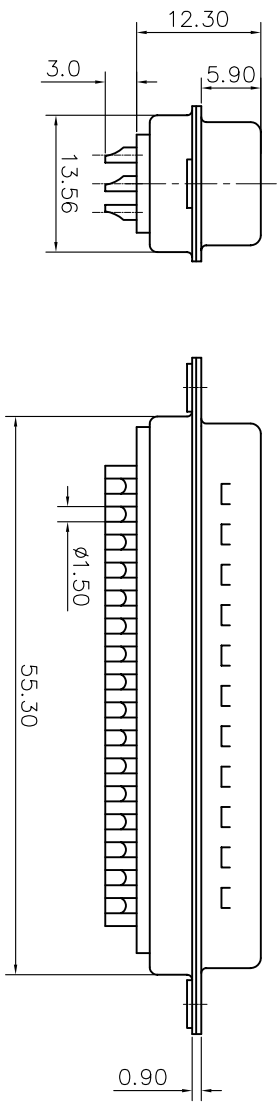


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A		07/11/07	

**D-SUB TECHNICAL DATA**

SHELL : Steel, 2.5um (100u") min tin over 1.25um (50u") min nickel  
 BODY : Glass filled thermoplastic.  
 Flame retardant to UL94 V-0  
 CONTACTS : brass.  
 0.76um(30u") min gold over 0.05um(2u") min nickel  
 ELECTRICAL : Voltage rating :1000 V RMS at 50 Hz  
 Current rating 5A.  
 Insulation resistance >1000 M Ohms  
 Contact resistance 20 mOhms max.  
 CLIMATIC : Temperature range -55 °C up to 125°C  
 MARKING : Amphenol...(Series No.)  
 Commercial reference  
 Manufacturing date

**PRODUCT CODE**

**L 717 SD D 50 P C309**

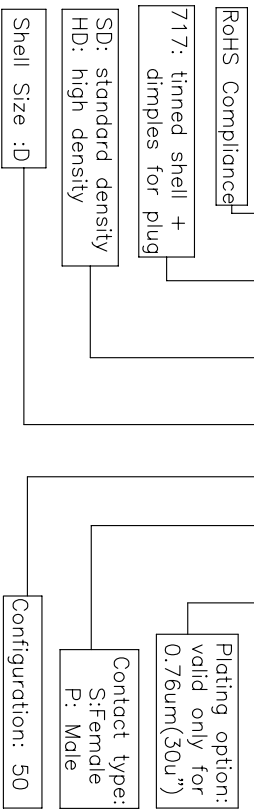

UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE	
U.S.	METRIC	DRAWN	Issue	BY	DATE
±	0.50	Checked	146.0000	07/11/07	
±	0.30	Checked		07/11/07	
±	0.20				
FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES					
DIMENSIONS					
U.S.	DIMENSIONS		ANGLE OF PROJECTION		
MM	MM		NONE		
TITLE					
Stamped and Formed connector, SD series					
SIZE		DRAWING NO.		REV.	
A4		C L717SDD50PC309		A	
SCALE		NONE		SHEET 1 OF 1	

Amphenol