


This document is the property of Amphenol Corporation and is delivered on the basis of an implied warranty of merchantability and fitness for the particular purpose for which it is intended. It is not to be used for manufacturing or sales by anyone other than Amphenol Corporation or its authorized agents. Amphenol Corporation reserves the right to change the design or to use any information in this document without notice.

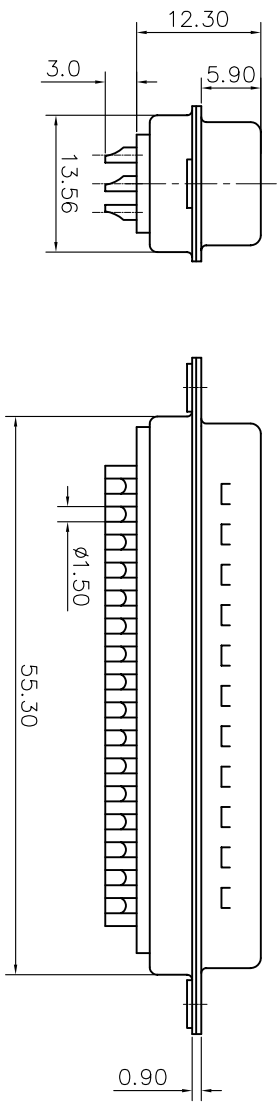


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A		07/11/07	

D-SUB TECHNICAL DATA

SHELL : Steel, 2.5um (100u") min tin over 1.25um (50u") min nickel
 BODY : Glass filled thermoplastic.
 Flame retardant to UL94 V-0
 CONTACTS : brass.
 0.76um(30u") min gold over 0.25um(10u") min nickel
 ELECTRICAL : Voltage rating :1000 V RMS at 50 Hz
 Current rating 5A.
 Insulation resistance >1000 M Ohms
 Contact resistance 20 mOhms max.
 CLIMATIC : Temperature range -55 °C up to 125°C
 MARKING : Amphenol...(Series No.)
 Commercial reference
 Manufacturing date

PRODUCT CODE

L 717 SD D 50 P C309

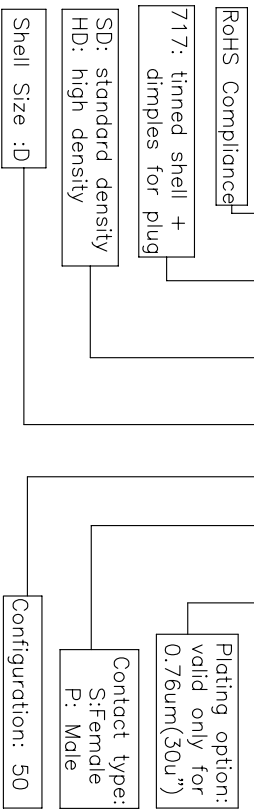

UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE	
U.S.	METRIC	DRAWN	Iss. by	7/7/07	7/7/07
T: +/-	0.50	CHECKED	146.using	7/7/07	7/7/07
XX: +/-	0.30				
XXX: +/-	0.20				
ANGLES +/-	2°				

FOR MATERIALS AND FINISHES
 REMOVE SHARP EDGES
 SEE NOTES

DRAWING FILE :

ANGLE OF PROJECTION

TITLE
 Stamped and Formed connector, SD series

Amphenol

DIMENSIONS		SCALE	
U.S.	INCHES	SCALE	SHEET
MM	MM	NONE	1 OF 1

SIZE DRAWING NO.
 A4 C L717SDD50PC309

REV.
 A

