


This document is the property of Amphenol Corporation and is delivered on the understanding that it is for the sole use of the recipient for the manufacture or sale of goods by or for the recipient. It is not to be used for any other purpose and no right is granted to disclose or to use any information in this document.

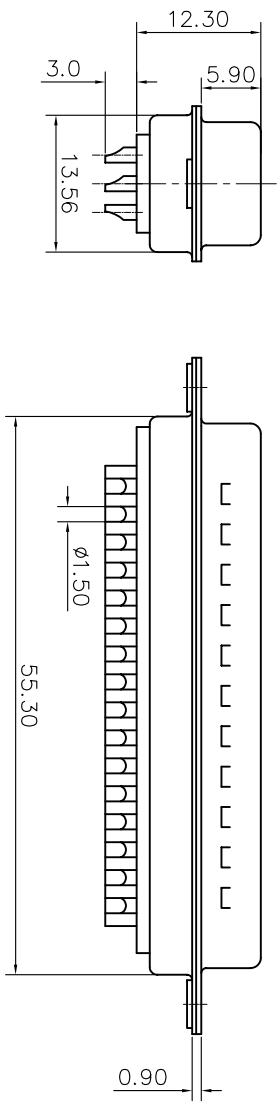


| REVISIONS | | | |
|-----------|-------------|----------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | | 07/11/07 | |

D-SUB TECHNICAL DATA

SHELL : Steel, 2.5um (100u") min tin over 1.25um (50u") min nickel
 BODY : Glass filled thermoplastic.
 Flame retardant to UL94 V-0
 CONTACTS : brass.
 0.76um(30u") min gold over 0.65um(25u") min nickel
 ELECTRICAL : Voltage rating :1000 V RMS at 50 Hz
 Current rating 5A.
 Insulation resistance >1000 M Ohms
 Contact resistance 20 mOhms max.
 CLIMATIC : Temperature range -55 °C up to 125°C
 MARKING : Amphenol...(Series No.)
 Commercial reference
 Manufacturing date

PRODUCT CODE

L 717 SD D 50 P C309

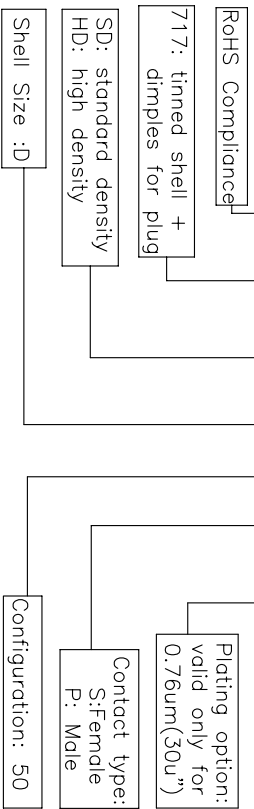

| UNLESS OTHERWISE SPECIFIED | | APPROVAL | | DATE | |
|---|--------|----------|----------|--------------|--------|
| U.S. | METRIC | DRAWN | Iss. by | 7/7/07 | 7/7/07 |
| T: +/- | 0.50 | CHECKED | 146.4000 | 7/7/07 | 7/7/07 |
| FRACTIONS +/- | 0.30 | | | | |
| ANGLES +/- | 0.20 | | | | |
| FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES | | | | | |
| DIMENSIONS U.S. INCHES | | | | | |
| DRAWING FILE : ANGLE OF PROJECTION | | | | | |
| TITLE | | | | | |
| Stamped and Formed connector, SD series | | | | | |
| SIZE DRAWING NO. | | SCALE | | SHEET 1 OF 1 | |
| A4 | | NONE | | A | |
| C L717SDD50PC309 | | | | | |

Amphenol