

D-SUB TECHNICAL DATA

Flame retardant to UL94 V-0

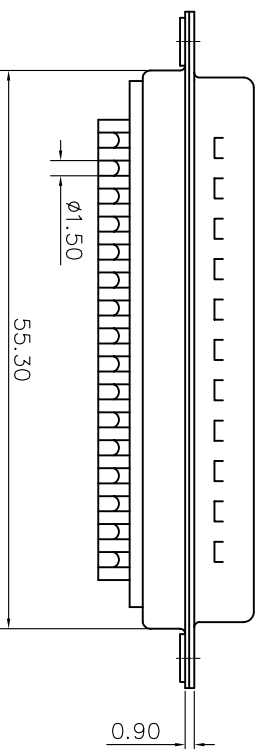

CONTACTS : brass.

Current rating 5A.

Insulation resistance >1000 M Ohms
Contact resistance 20 mOhms max.

CLIMATIC : Temperature range -55°C up to 125°C

MARKING : Amphenol-...(Series No.)

Commercial reference
Manufacturing date

PRODUCT CODE

L 717 SD D 50 P C309

Rohs Compliance

717: tinned shell +
dimples for plug

SD: standard density
HD: high density

Shell Size :D

Plating option: valid only for 0.76um(30u")	
---	--

Contact type:
S:Female
P: Male

Configuration: 50

