



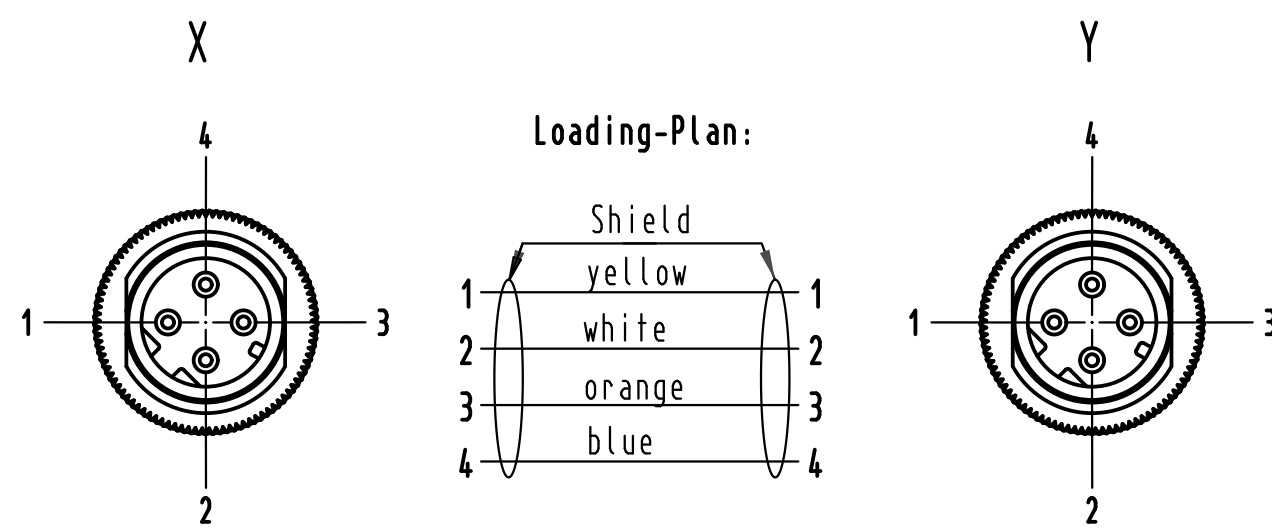

Shield

Shield	Yellow	White	Orange	Blue
1	1	1	1	1
2	2	2	2	2
3	3	3	3	3
4	4	4	4	4

- Transmission properties in accordance with ISO/IEC 11801:2002: Class D
- Temperature range: -20°C ...+60°C
- Protection level: IP67
- Recommended breakaway torque for the screw M12x1 - 0,6Nm

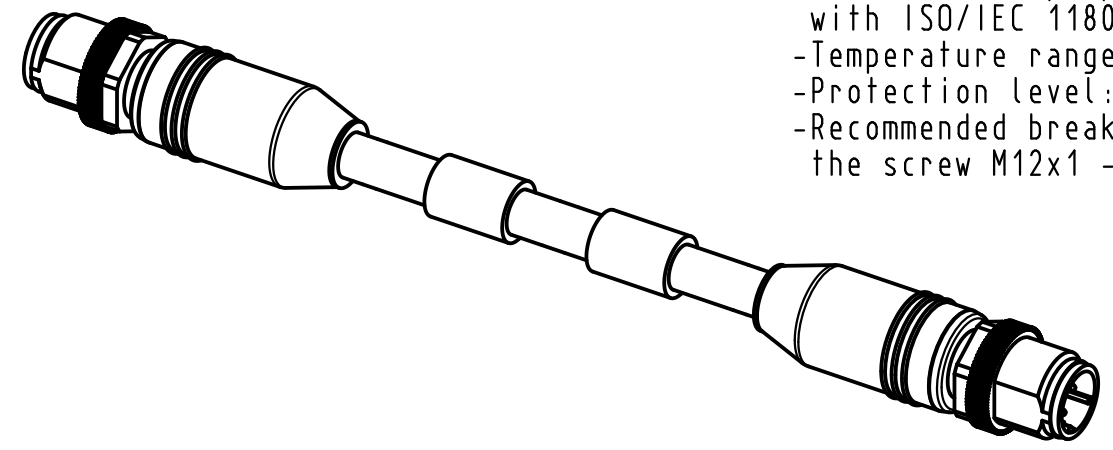

11	09 47 22 22 023	AWG 22/7 outdoor PVC	25 m
10	09 47 22 22 022	AWG 22/7 outdoor PVC	7,5 m
9	09 47 22 22 015	AWG 22/7 outdoor PVC	40 m
8	09 47 22 22 013	AWG 22/7 outdoor PVC	20 m
7	09 47 22 22 012	AWG 22/7 outdoor PVC	15 m
6	09 47 22 22 011	AWG 22/7 outdoor PVC	10 m
5	09 47 22 22 006	AWG 22/7 outdoor PVC	5 m
4	09 47 22 22 005	AWG 22/7 outdoor PVC	3 m
3	09 47 22 22 004	AWG 22/7 outdoor PVC	2 m
2	09 47 22 22 003	AWG 22/7 outdoor PVC	1,5 m
1	09 47 22 22 002	AWG 22/7 outdoor PVC	1 m
Cont. no.	Part-No.	Type of cable	Dim. a[m]

 All Dimensions in mm Original Size DIN A 3			Techn. Character.				Nicht tolerierte Maße/ <i>Free size tolerances</i>				
				Dat.	Name	Maßstab/ <i>Scale</i> 2:1	M12 cord, 2xM12 overmolded, D-coded 4xAWG 22/7, CAT5				
			Detail.	06.08.08	MS						
			Insp.	06.08.08	RA						
			Stand.								
DRS 475A	03.03.09	MR	HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP					TB 09 47 22 22 xxx			Blatt/ <i>page</i>
35009								Sub. Sub			
Mod.	Dat.	Name									