


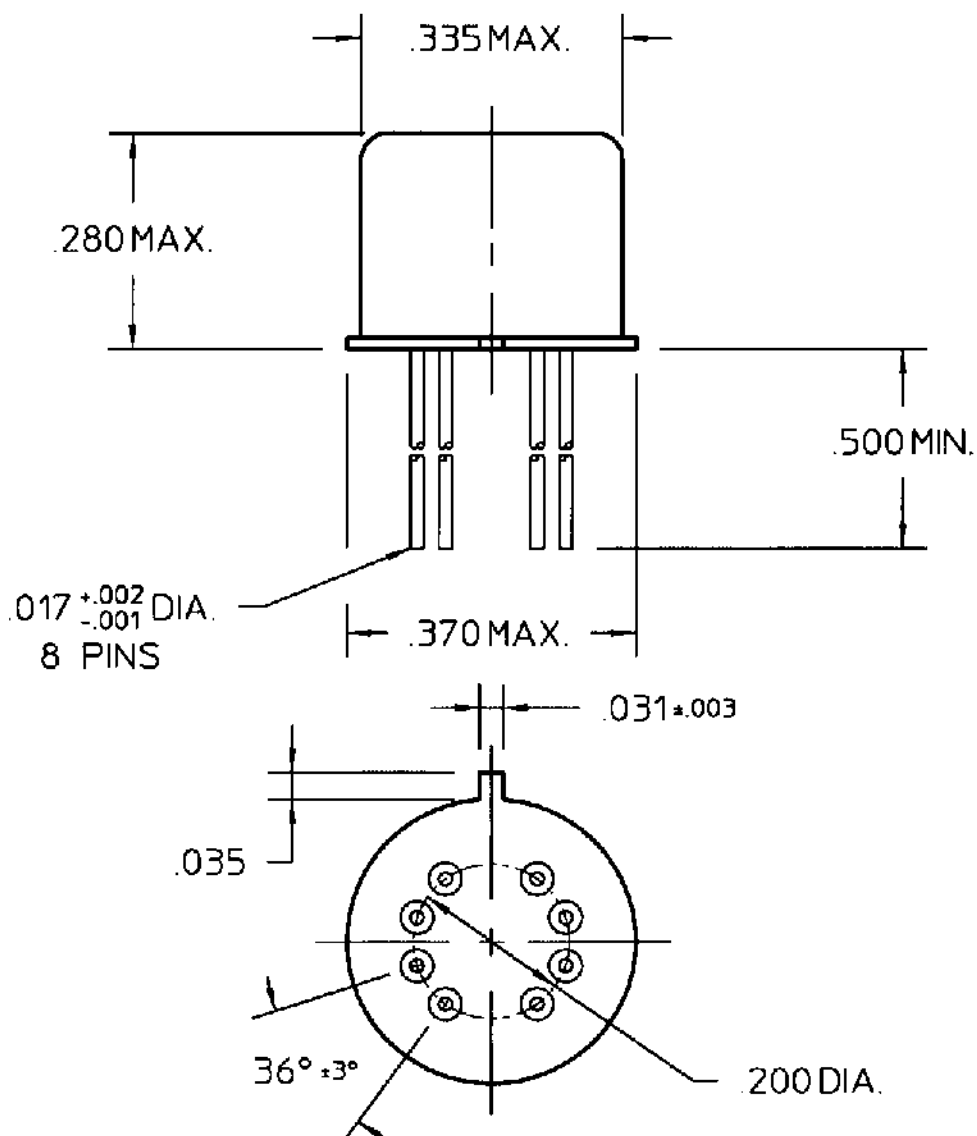

COIL: @ 25°C

RESISTANCE 50 OHMS $\pm 10\%$

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 2.7 VDC

MUST RELEASE 1.4 VDC MAX. 0.22 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.

RELEASE TIME 4.0 MS MAX.

CONTACT STABILIZATION TIME 2.0 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/30/95 CK. 11/30/95

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/15-082P

TYPE JMAD RELAY

JMACD-5XP