
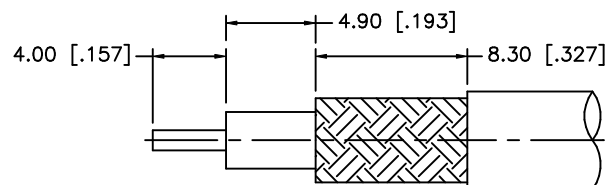




REV.	DATE	DESCRIPTION
NC	10/09/06	UPDATE DRAWING FORMAT

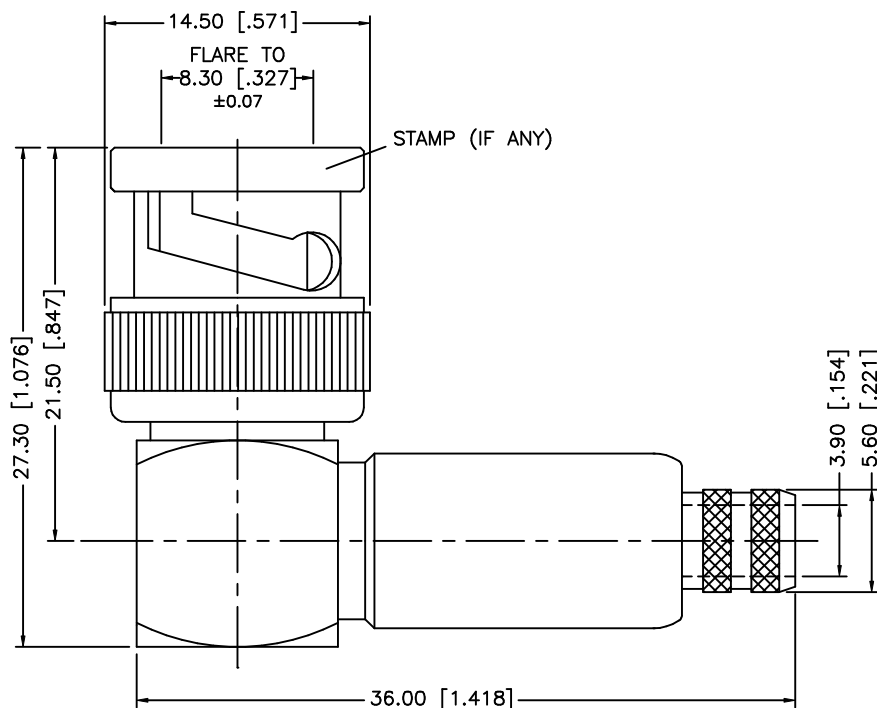

RECOMMENDED
CABLE STRIPPING DIM'S

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .255".
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068".

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.								10/09/06
7						CHECKED									
6						ISSUED			PART DESCRIPTION BNC R/A CRIMP PLUG (FOR RG-59/U CABLE)						
5	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1								
4	CONTACT PIN	PHOS. BRONZE	GOLD	1				PART NO. 112185							
3	CONTACT PIN	BRASS	GOLD	1											
2	INSULATOR	DELRIIN	NATURAL	2				DWG. NO. 112185.DWG REV. NC SIZE A SCALE NA							
1	BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE	C:/112/112185.DWG								