

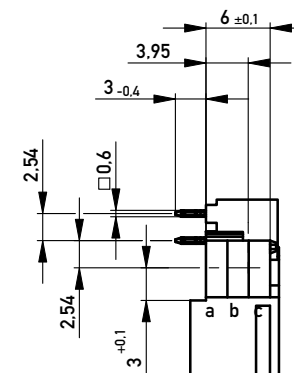


Leiterplatten- Lochbild / PCB drillhole pattern

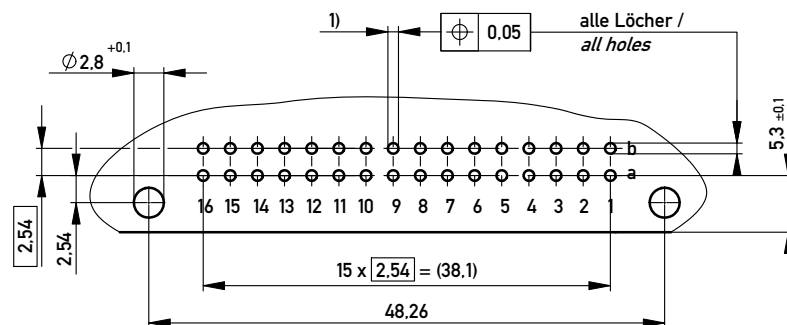


Stecklänge / mating length



E = *early mate, late break* / voreilend

S = standard

L = late mate, early break / nacheilend

Elastische Einpresszone / *compliant pressfit zone*

Isolierwerkstoff / *housing material* : PBT GF 30

Bauart 4 / type 4

Anforderungsstufe 2 = 400 Steckzyklen / *performance class 2 = 400 mating cycles*

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

1) $\varnothing 1,0^{+0,09}_{-0,06}$ Durchmesser des metallisierten Loches

$\phi 1.0^{+0.09}_{-0.06}$ Diameter of finished plated-through hole

Bedruckung siehe Zeichnung 294905

marking see drawing 294905

Information: All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances		 All Dimensions in mm	Scale	2:1	
	Subject to modification without prior notice. Drawing will not be updated.		 www.ERNI.com	Designation Messerleiste B/2 32 EE <i>Male Connector B/2 32 Pressfit</i>		
				384270 I A3		
A		20.10.2009		Class	STVB/2	
Index		Date				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[384270](#)