




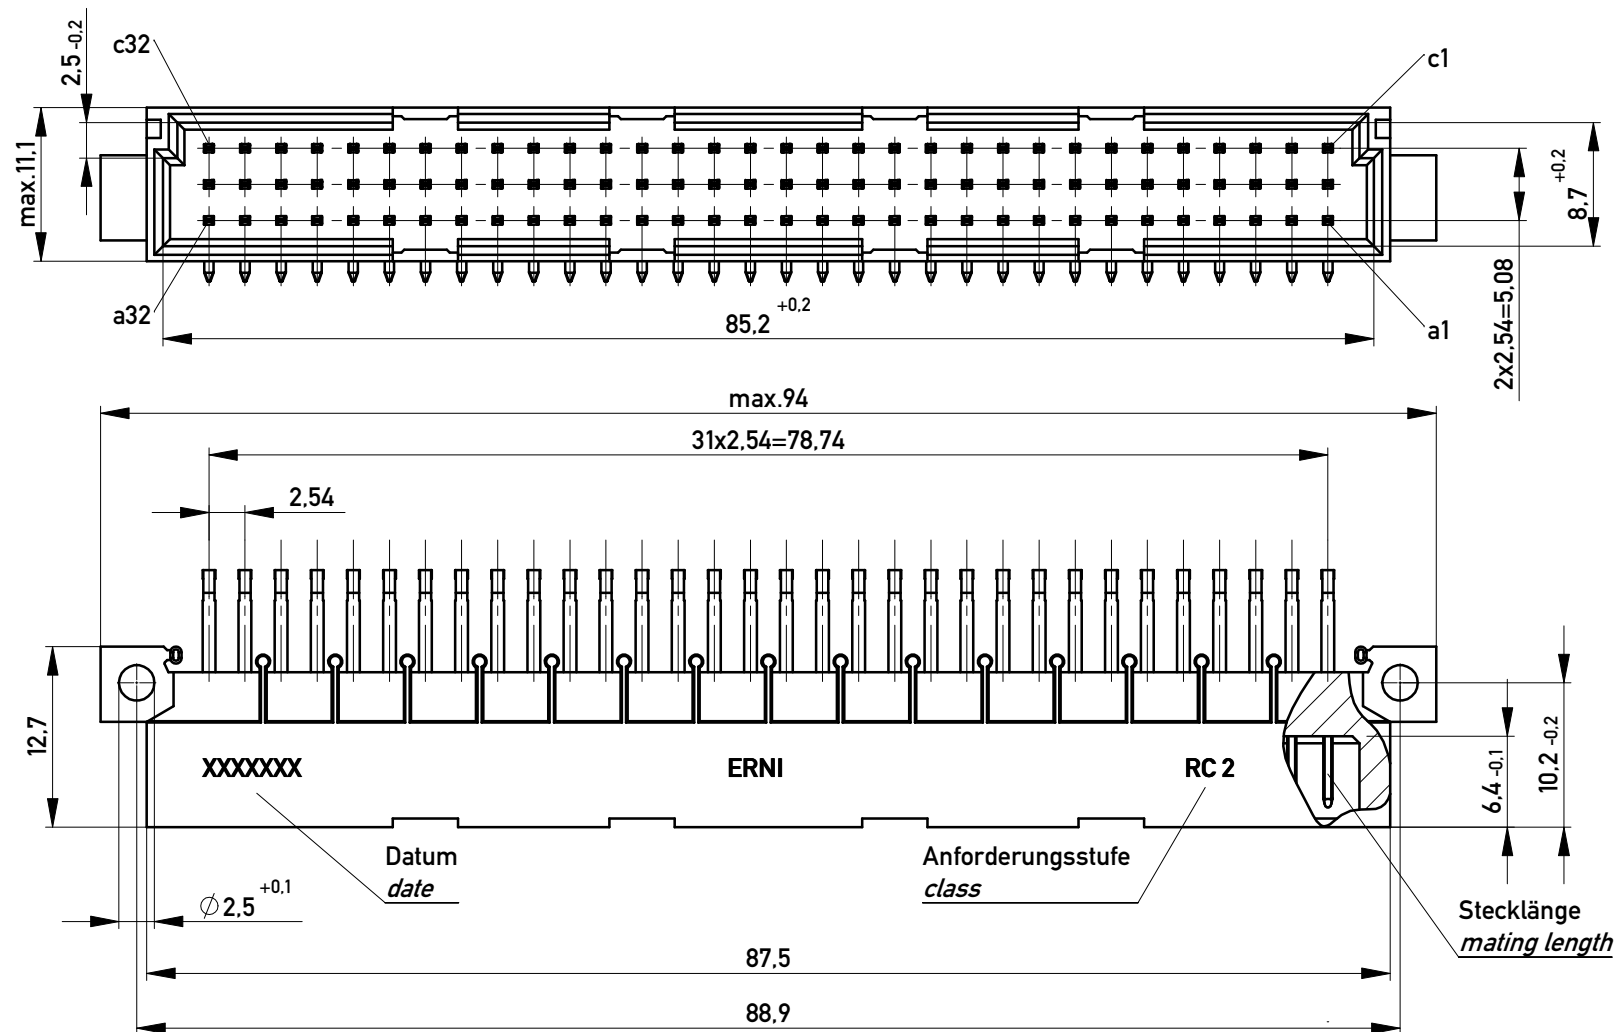


Bestückungsplan / contact layout

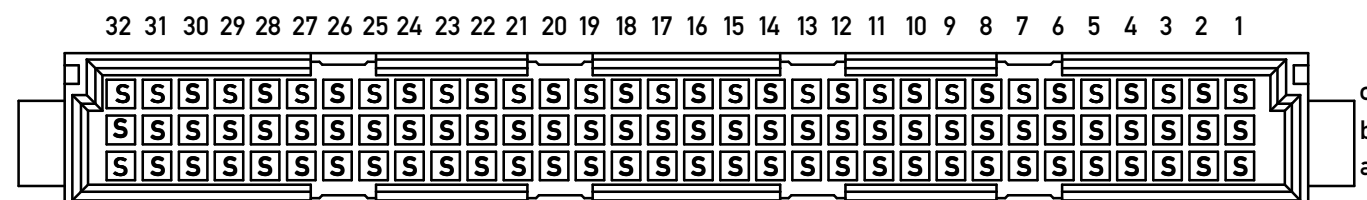

Leiterplatten-Lochbild / PCB drillhole pattern

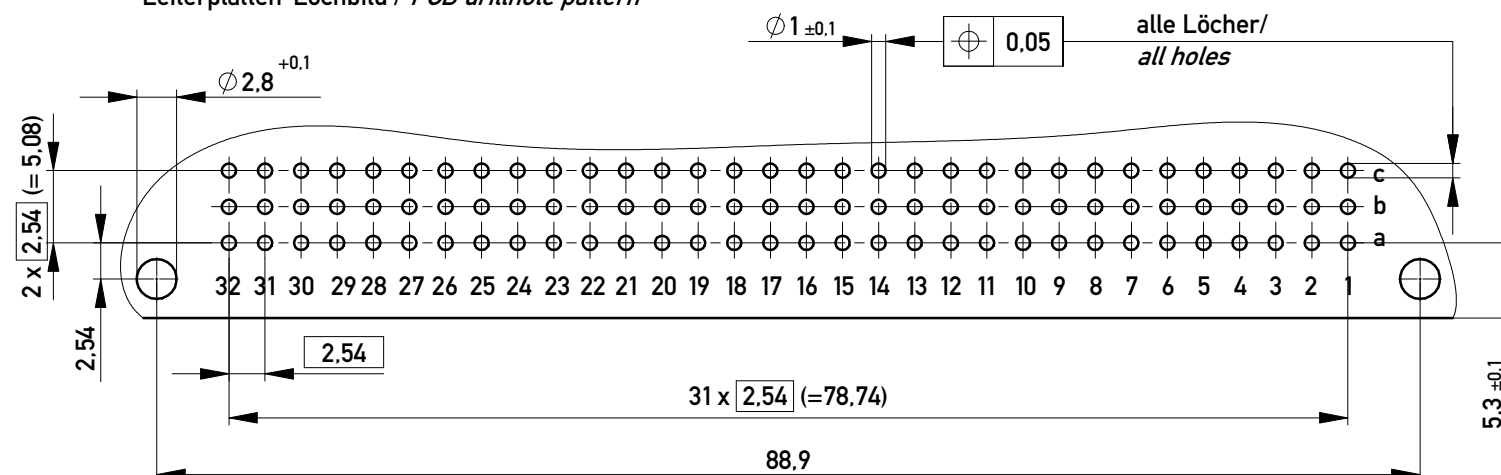


Stecklänge / mating length



E = early mate, late break / voreilend

S = standard

L = late mate, early break / nacheilend

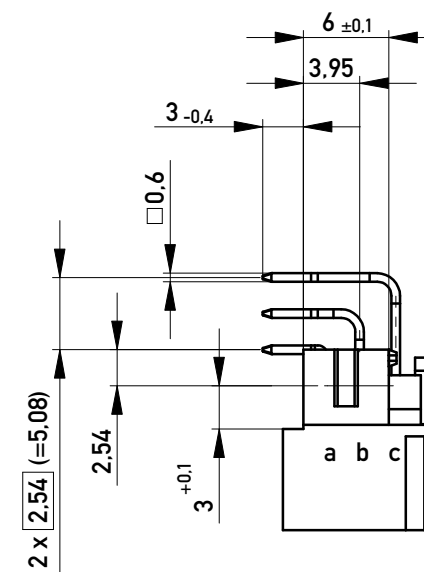

Isolierwerkstoff / housing material : PBT GF 30


Bauart 4 / type 4

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Lötanschluss 0,6x0,6mm / solder terminal 0,6x0,6mm

Information:			Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.			Designation
b			www.ERNI.com			Messerleiste C 96 Löt Male Connector C96 solder
Index			Class			364915
Date			STVC			I A3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[364915](#)