
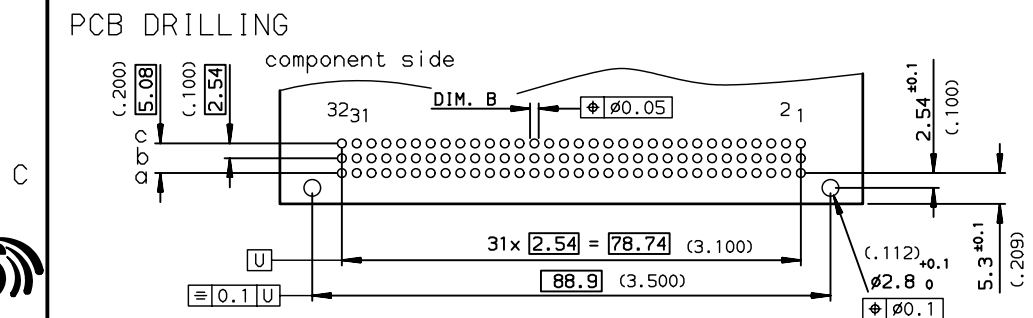
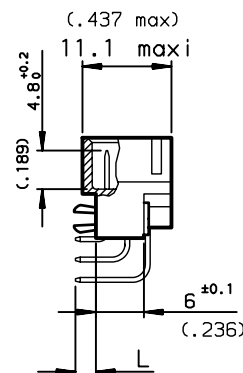


DIMENSIONS mm (inches)

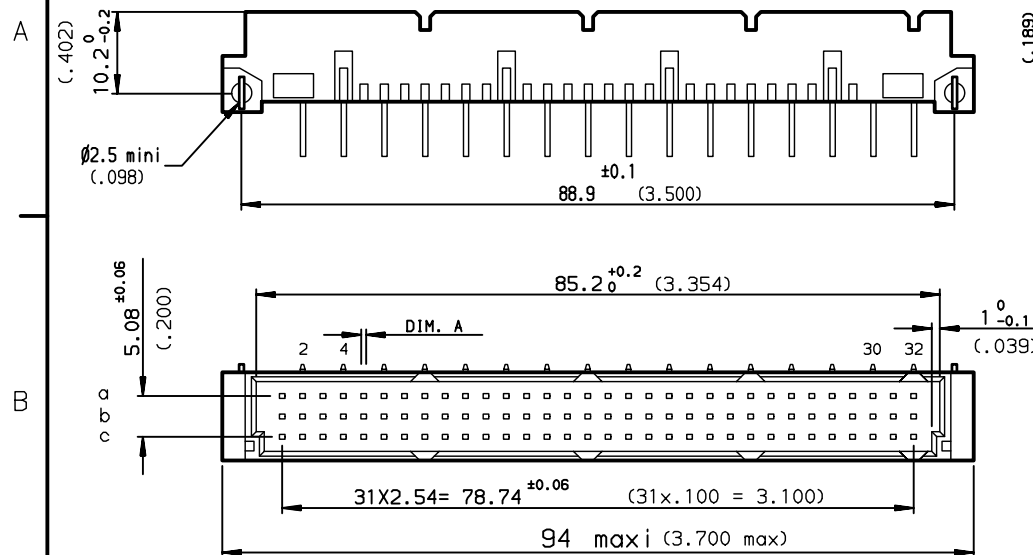

PART NUMBER		8609		71		8	
PIN OUT		rows a-b-c		3 - 48		4 - 32	
NUMBER OF CONTACTS							
TERMINATION		L = 2.75 ±0.15 (.108)		A = 0.6X0.6		B = 0.8 ±0.3	
		L = 4.15 ±0.15 (.163)		A = 0.6X0.6		B = 0.8 ±0.3	
OPTIONS		no option		for PCB thickness 1.6 mm		7	
		with harpoons				H	
PERFORMANCE CLASS		DIN 41612 class 3				4	
		DIN 41612 class 2				5	
		DIN 41612 class 1				6	
TERMINATION TYPE		TIN LEAD				000E1	
		LEAD FREE				E1LF	

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000A

European Views

rev	ecn no	dr	date
A	-	-	1997/10/27
B	LS05-001	JTA	2005/03/02
C	LS06-0095	LGO	2006/07/21
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1997/10/27	ANGULAR	0.X	±0.1	size	Scale
Eng	TARON	1997/10/27	LINEAR	0.XX	±0.1	A3	1.5
Chr	LEGARE	1997/10/27		0.XXX	±0.1		
Appr	LEGARE	1997/10/27	Product family		DIN 8609	Spec ref	-
FCI		RIGHT ANGLE MALE - STYLE C		C-8609-0631		Rev.	
		SOLDER TO BOARD		C			
catalog no				CUSTOMER		sheet 1 of 1	