THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION MAR ,6 .
© COPYRIGHT 2015 Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| J | — |

REVISIONS 変更

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | K4 | REVISED ECR-15-003152 | 06MAR15 | KF | RK |

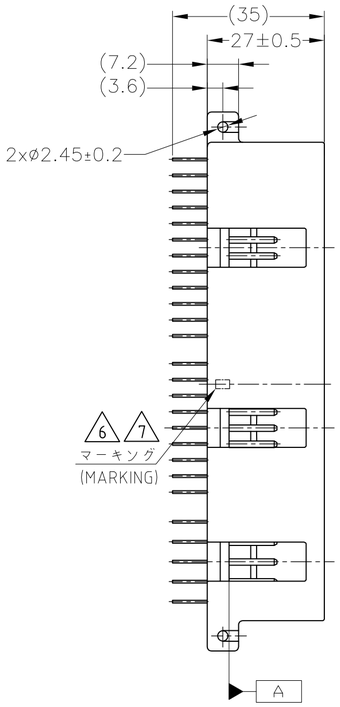


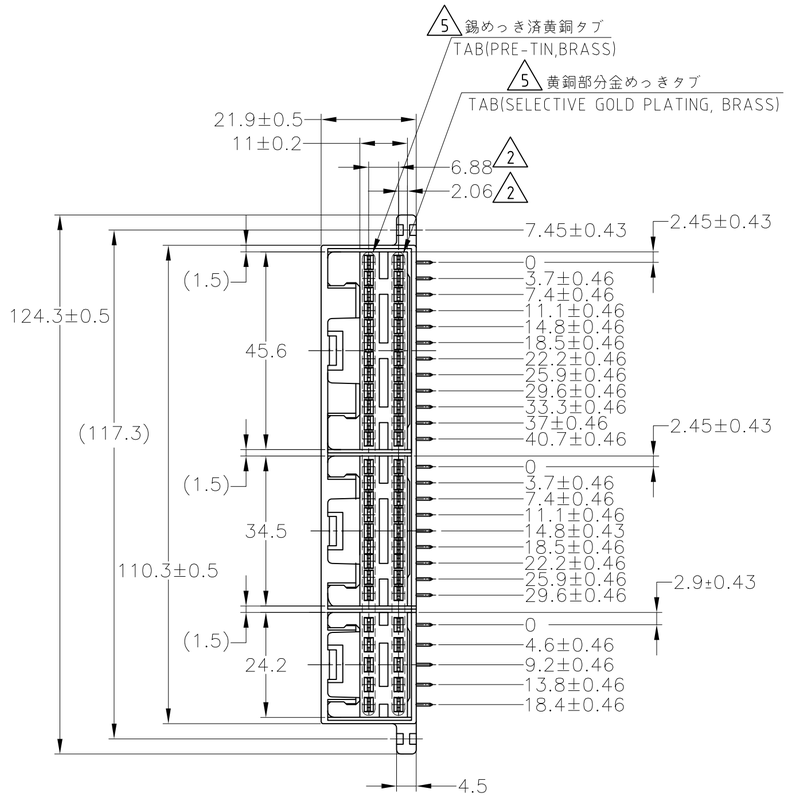





プリント基板取付穴寸法
(MOUNTING DIMENTIONS FOR P.C. BOARD)

1. 本図はコネクタ側より見た図である(VIEW FROM CONNECTOR SIDE)
2. 板厚: 1.6±0.15 (P.C. BOARD THICKNESS: 1.6±0.15)
3. 公差: ±0.1 (TOLERANCE: ±0.1)

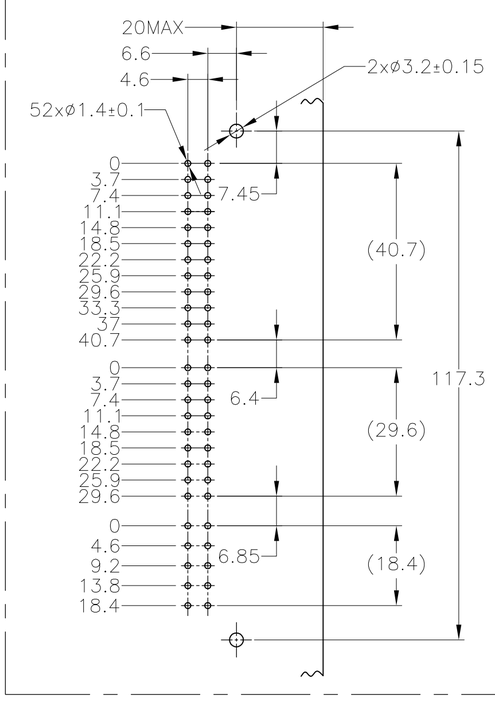


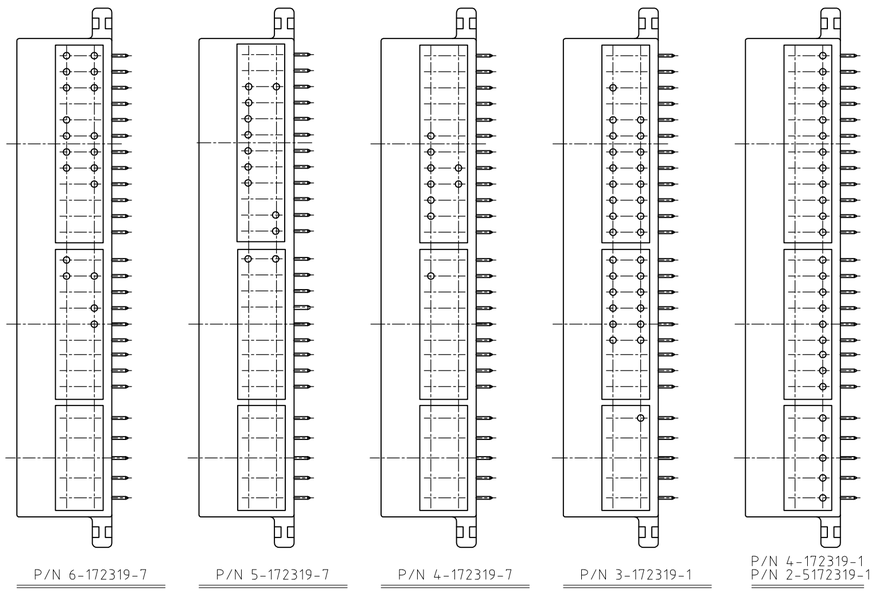


A方向から見た金めっき配置図
(LAYOUT OF GOLD PLATING CONTACT VIEW FROM "A" DIRECTION)

GOLD PLATING CONTACT
(金めっき品)

1. THE MATING COUNTERPART
   P/N;10Pos 172315. 18Pos 172316. 24Pos 172317
2. TO BE MEASURED WITHIN 2mm FROM A
3. SELECTIVE GOLD PLATED (CONTACT AREA) TIN LEAD PLATED (SOLDERING AREA) OVER NICKEL PLATED
4. SOLDERING AFTER MOUNTING P.C.BOARD SECURE BY USING M3, PAN HEAD TAPPING SCREW
5. APPLICABLE PART NUMBERS; 2-172319-1,-7
6. INDICATED PREFIX AND SUFFIX OF PRODUCT P/N BY HOT STAMP (APPLICABLE P/N 5-172319-7)
7. CHARACTERS MUCT BE CLEAR AND LEGIBLE

1. 嵌合する相手ハウジング型番；10極 172315 18極 172316 24極 172317
2. A 面より2mmの範囲で測定のこと
3. 全面ニッケルメッキ上に部分メッキ(嵌合部)及び半田メッキ(半田付部)
4. プリント基板への取付けは M3のタッピンネジ(JIS B1115 1種)で締付けた後半田付けをする
5. 2-172319-1,-7のみに適用
6. 製品型番のプリフィックスをカラーホットマーキングにより表示する (適用型番5-172319-7)
7. 文字は明瞭であること

| | SOLDERING SIDE 半田付け部 | CONTACT SIDE 接触部側 | COLOR 色 | PART NUMBER 製品型番 |
|---|---|---|---|---|
| | CONTACT FINISH コンタクト仕上 | | | |
| | SELECTIVE TIN (MATTE) | SELECTIVE GOLD × 26 | YELLOW 黄色 | 2-5172319-1 |
| | PRE-TIN × 26 | | | |
| | SELECTIVE TIN (MATTE) | SELECTIVE GOLD x 52 | YELLOW 黄色 | 1-5172319-7 |
| | SELECTIVE TIN (MATTE) | SELECTIVE GOLD x 52 | GRAY 灰色 | 1-5172319-6 |
| OBSOLETE | TIN-LEAD x 52 | | YELLOW 黄色 | 8-172319-7 |
| OBSOLETE | TIN-LEAD | SELECTIVE GOLD × 19 | YELLOW 黄色 | 6-172319-7 |
| | PRE-TIN × 33 | | | |
| OBSOLETE | TIN-LEAD | SELECTIVE GOLD × 12 | YELLOW 黄色 | 6 7 5-172319-7 |
| | PRE-TIN × 40 | | | |
| OBSOLETE | TIN-LEAD | SELECTIVE GOLD × 9 | YELLOW 黄色 | 4-172319-7 |
| | PRE-TIN × 43 | | | |
| OBSOLETE | TIN-LEAD | SELECTIVE GOLD × 26 | NATURAL 自然色 | 4-172319-1 |
| | TIN-LEAD × 26 | | | |
| | TIN-LEAD | SELECTIVE GOLD × 30 | NATURAL 自然色 | 3-172319-1 |
| | PRE-TIN × 22 | | | |
| | TIN-LEAD | SELECTIVE GOLD × 26 | NATURAL 自然色 | 5 2-172319-7 |
| | PRE-TIN × 26 | | | |
| | TIN-LEAD | SELECTIVE GOLD × 26 | YELLOW 黄色 | 5 2-172319-1 |
| | PRE-TIN × 26 | | | |
| | TIN-LEAD 3 | SELECTIVE GOLD x 52 | YELLOW 黄色 | 1-172319-7 |
| | TIN-LEAD 3 | SELECTIVE GOLD x 52 | GRAY 灰色 | 1-172319-6 |
| | PRE-TIN × 52 | | YELLOW 黄色 | 172319-7 |
| | PRE-TIN × 52 | | NATURAL 自然色 | 172319-1 |

172319

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | |
|---|---|---|
| DWN | S.FUJITA | 04AUG08 |
| CHK | T.SHINOHARA | 04AUG08 |
| APVD | K.BETSUI | 04AUG08 |
| PRODUCT SPEC 製品規格 | — | |
| APPLICATION SPEC 取付適用規格 | — | |
| WEIGHT | — | |

TE Connectivity

NAME 名称: 52POSITION CAP HOUSING ASSY PULSE LOCK CONNECTOR

| SIZE | CAGE CODE | DRAWING NO 番号 | RESTRICTED TO |
|---|---|---|---|
| A2 | 00779 | C-172319 | — |

CUSTOMER DRAWING | SCALE 尺度 1:1 | SHEET 1 OF 1 | REV K4

DIMENSIONS: 単位：粍 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差

| | |
|---|---|
| 0 PLC | ± – |
| 1 PLC | ± – |
| 2 PLC | ± – |
| 3 PLC | ± – |
| 4 PLC | ± – |
| ANGLES | ± – |

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差

| | | |
|---|---|---|
| $10_{\frac{1}{2}}$ | : | ±0.2 |
| $30_{\frac{1}{2}}$ | > 10 : | ±0.25 |
| $100_{\frac{1}{2}}$ | > 30 : | ±0.3 |
| ANGLE | : | 3° |

MATERIAL 材料: PBT

FINISH 仕上: –