


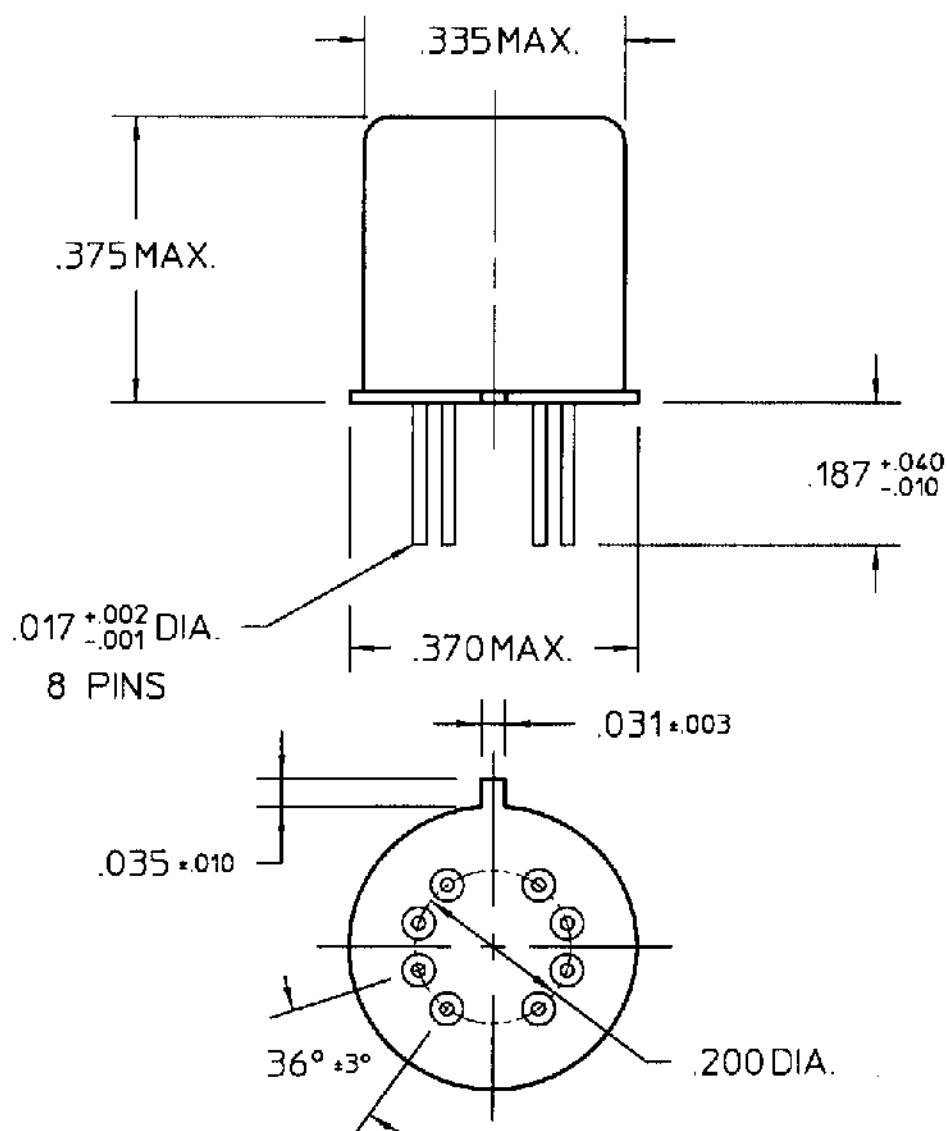

COIL: @ 25°C

RESISTANCE 4000 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE VOLTAGE 12.8 VDC

TURN-ON BASE CURRENT 0.5 mADC

MUST RELEASE 8.0 VDC MAX, 1.37 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: TURN-ON TIME 3.5 MS MAX

TURN-OFF TIME 7.5 MS MAX

CONTACT STABILIZATION TIME 2.0 MS MAX

CUSTOMER DATA SHEET

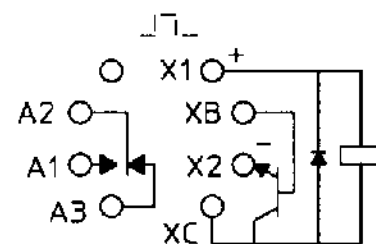

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 10/17/97 *CK* *ERRY* 10/17/97

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. QPL
CUST. NO. M28776/4-030M

TYPE J1MST RELAY

J1MSPT-26XM