


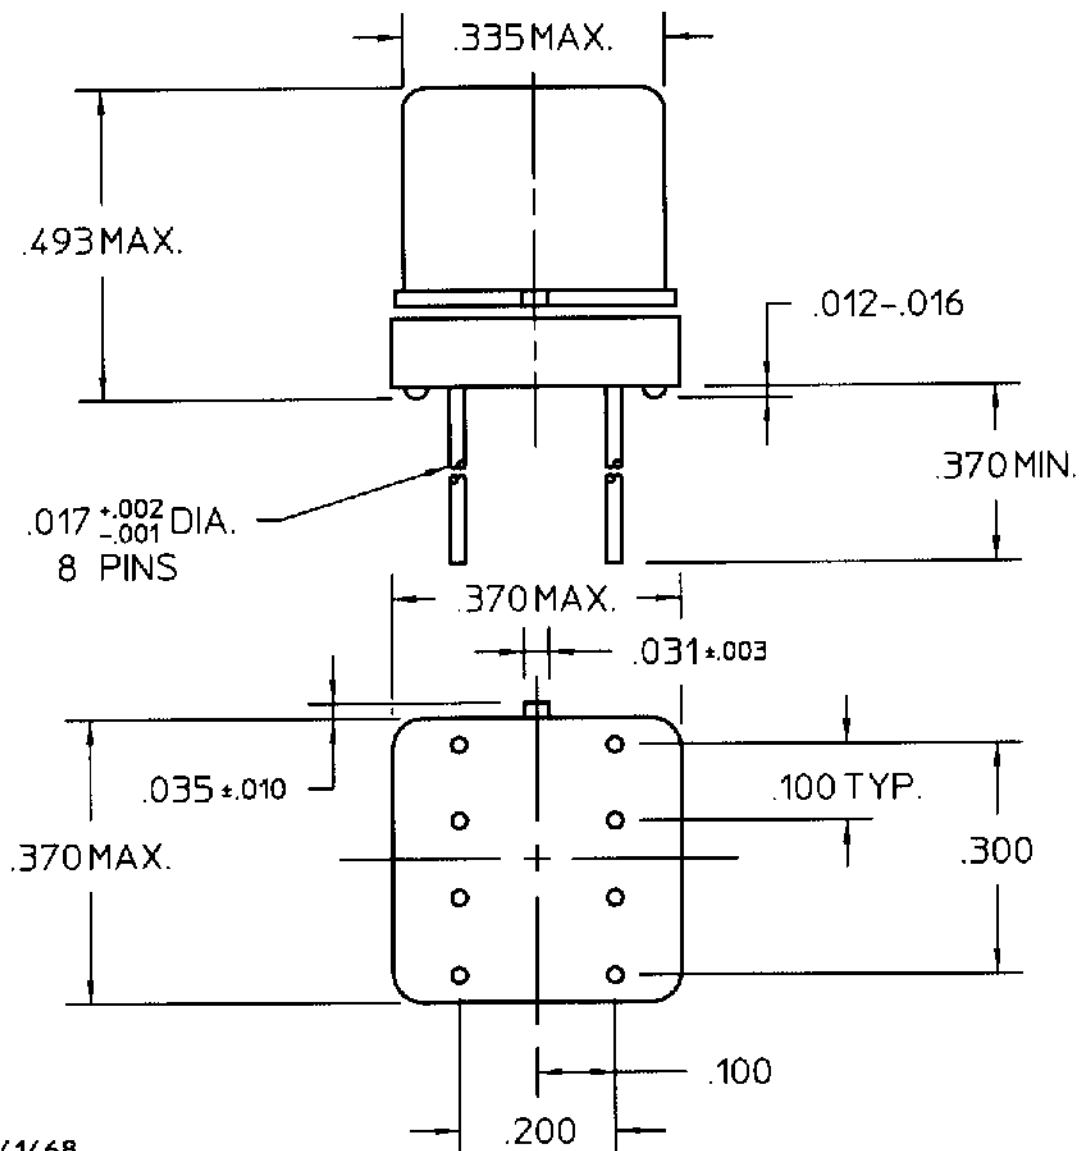

REV. 0

DCO 141468


COIL: @ 25°C
 RESISTANCE 100 OHMS $\pm$ 10%
 NOMINAL VOLTAGE 5.0 VDC
 MUST OPERATE 2.6 VDC
 MUST RELEASE 1.4 VDC MAX, 0.23 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX
 RELEASE TIME 2.0 MS MAX
 CONTACT BOUNCE 1.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 1A 28 VDC RESISTIVE 100,000
 OPERATIONS

DR. B.D. 11/9/99

CK. *Freek* 11/9/99

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL

CUST. NO. M39016/11-041L

REV.

JMS RELAY

JMSC-5XLS