THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

PROJECT	PRJ–16–000909157
PART NO.	X–2308340–X
DESCRIPTION	FULL METAL HOODS SIZE 1
CUSTOMER	GENERAL MARKET

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECR–16–013123	19SEP2016	KK	GG

1–2308340–3

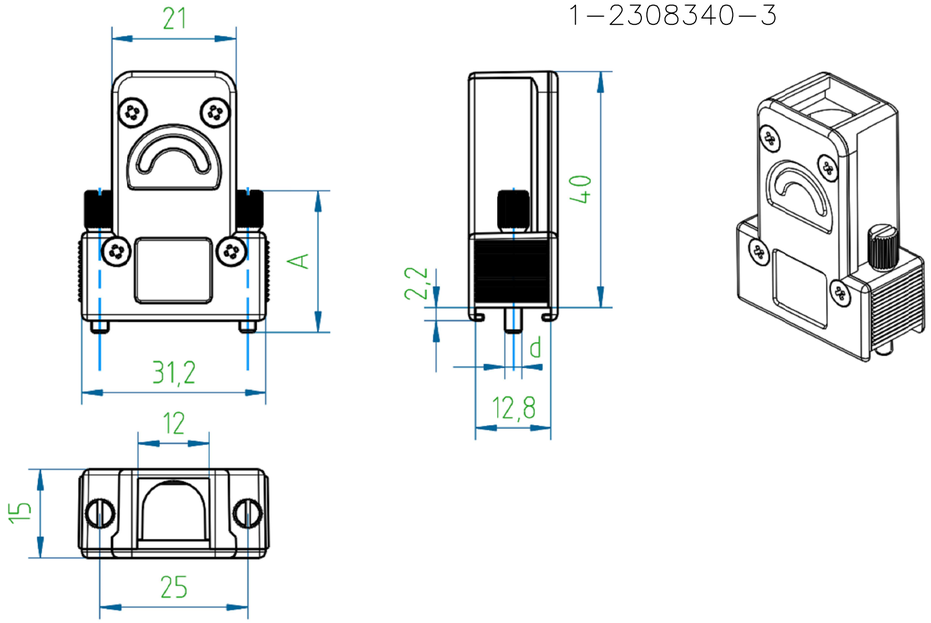

2–2308340–1

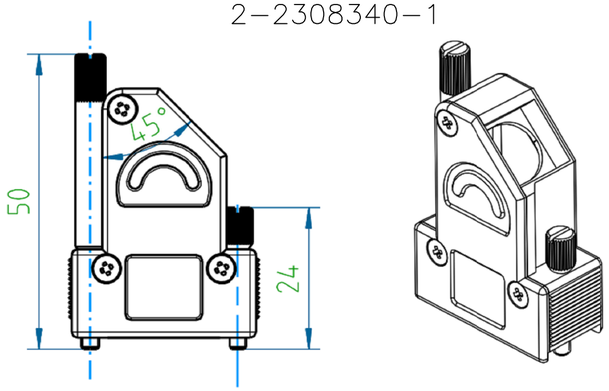

Case

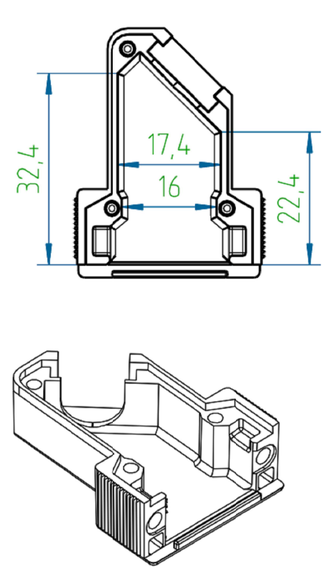

Case

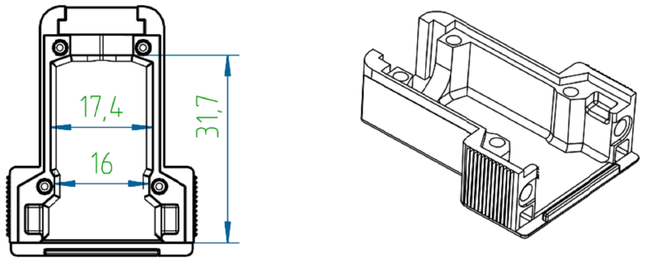

NOTES:

1. FINISH:
   1–2308340–1 TO 2–2308340–2 – CASE RAW.
   2–2308340–3 TO 3–2308340–4 – CASE NICKEL–PLATED.
2. LOCKING SCREWS: NICKEL–PLATED
   OTHER SCREWS: ZINC–PLATED
3. TEMPERATURE RANGE: –40°C TO +90°C
4. CABLE DIAMETER WITH EXTERNAL DIAMETER CABLE CLAMP: 4–14 mm.
5. STRAND DIAMETER OF CRIMP FLANGE: 2.7–8.7 mm.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: DIN ISO 2768–m DIN 16901 130B

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL: –

FINISH: –

DWN	KIRAN K 02AUG2016
CHK	GUNASEKHAR G 02AUG2016
APVD	GUNASEKHAR G 02AUG2016
PRODUCT SPEC	–
APPLICATION SPEC	–
WEIGHT	

TE Connectivity

NAME: FULL METAL HOODS SIZE 1

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C–2308340	–

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 2 | REV A1

2308340

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	–	–

–	–	2–2308340–2	FULL METAL HOODS SIZE1–12	1–2308334–6	1–2308334–4	LOCKING SCREW (M3 LONG KNURLED)	LOCKING SCREW (M3 SHORT KNURLED)	S OVER	M3	43
–	–	2–2308340–1	FULL METAL HOODS SIZE1–11	1–2308334–5	1–2308334–3	LOCKING SCREW (4–40 UNC LONG KNURLED)	LOCKING SCREW (4–40 UNC SHORT KNURLED)		4–40 UNC	43
1–2308340–6	FULL METAL HOODS SIZE1–6	–	–	1–2308334–6		LOCKING SCREW (M3 LONG KNURLED)		50.0	M3	47
1–2308340–5	FULL METAL HOODS SIZE1–5	–	–	1–2308334–5		LOCKING SCREW (4–40 UNC LONG KNURLED)		50.0	4–40 UNC	47
1–2308340–4	FULL METAL HOODS SIZE1–4	2–2308340–0	FULL METAL HOODS SIZE1–10	1–2308334–4		LOCKING SCREW (M3 SHORT KNURLED)		24.0	M3	39
1–2308340–3	FULL METAL HOODS SIZE1–3	1–2308340–9	FULL METAL HOODS SIZE1–9	1–2308334–3		LOCKING SCREW (4–40 UNC SHORT KNURLED)		24.0	4–40 UNC	39
1–2308340–2	FULL METAL HOODS SIZE1–2	1–2308340–8	FULL METAL HOODS SIZE1–8	1–2308334–2		LOCKING SCREW (M3 W/SPRING WASHER)		20.7	M3	38
1–2308340–1	FULL METAL HOODS SIZE1–1	1–2308340–7	FULL METAL HOODS SIZE1–7	1–2308334–1		LOCKING SCREW (4–40 UNC W/SPRING WASHER)		20.7	4–40 UNC	38
PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	SUB–PART NO.		DESCRIPTION		A	d	WEIGHT, g
VERSION 180°		VERSION 135°		LOCKING SCREWS						
PART NO. (CASE RAW)										

–	–	3–2308340–4	FULL METAL HOODS SIZE1–24	1–2308334–6	1–2308334–4	LOCKING SCREW (M3 LONG KNURLED)	LOCKING SCREW (M3 SHORT KNURLED)	S OVER	M3	43
–	–	3–2308340–3	FULL METAL HOODS SIZE1–23	1–2308334–5	1–2308334–3	LOCKING SCREW (4–40 UNC LONG KNURLED)	LOCKING SCREW (4–40 UNC SHORT KNURLED)		4–40 UNC	43
2–2308340–8	FULL METAL HOODS SIZE1–18	–	–	1–2308334–6		LOCKING SCREW (M3 LONG KNURLED)		50.0	M3	47
2–2308340–7	FULL METAL HOODS SIZE1–17	–	–	1–2308334–5		LOCKING SCREW (4–40 UNC LONG KNURLED)		50.0	4–40 UNC	47
2–2308340–6	FULL METAL HOODS SIZE1–16	3–2308340–2	FULL METAL HOODS SIZE1–22	1–2308334–4		LOCKING SCREW (M3 SHORT KNURLED)		24.0	M3	39
2–2308340–5	FULL METAL HOODS SIZE1–15	3–2308340–1	FULL METAL HOODS SIZE1–21	1–2308334–3		LOCKING SCREW (4–40 UNC SHORT KNURLED)		24.0	4–40 UNC	39
2–2308340–4	FULL METAL HOODS SIZE1–14	3–2308340–0	FULL METAL HOODS SIZE1–20	1–2308334–2		LOCKING SCREW (M3 W/SPRING WASHER)		20.7	M3	38
2–2308340–3	FULL METAL HOODS SIZE1–13	2–2308340–9	FULL METAL HOODS SIZE1–19	1–2308334–1		LOCKING SCREW (4–40 UNC W/SPRING WASHER)		20.7	4–40 UNC	38
PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	SUB–PART NO.		DESCRIPTION		A	d	WEIGHT, g
VERSION 180°		VERSION 135°		LOCKING SCREWS						
PART NO. (CASE Ni–PLATED)										

NOTE:

* CRIMP FLANGE PN *–2308349–* TO BE ORDERED SEPARATELY.
* CRIMP BARREL TO BE USED IN COMBINATION WITH THE FLANGE PN *–2308350–* TO BE ORDERED SEPARATELY.
* CABLE CLAMP SCREW VERSION PN *–2308272–* TO BE ORDERED SEPARATELY.



CRIMP FLANGE

CRIMP BARREL

CABLE CLAMP

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: DIN ISO 2768–m DIN 16901 130B
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN	KIRAN K	02AUG2016
CHK	GUNASEKHAR G	02AUG2016
APVD	GUNASEKHAR G	02AUG2016
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT		

TE Connectivity

NAME: FULL METAL HOODS SIZE 1

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C–2308340	–

CUSTOMER DRAWING | SCALE NTS | SHEET 2 OF 2 | REV A1

2308340