
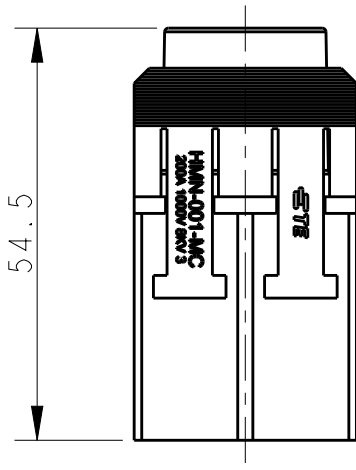
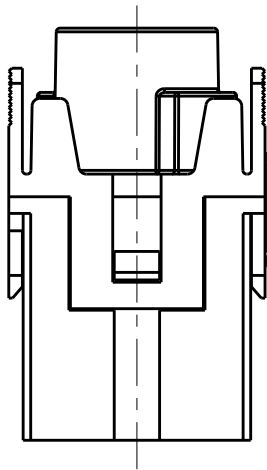
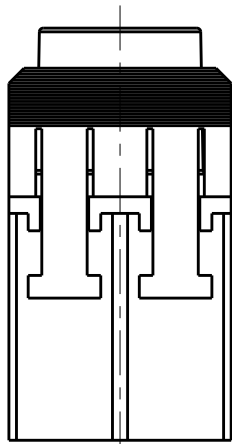
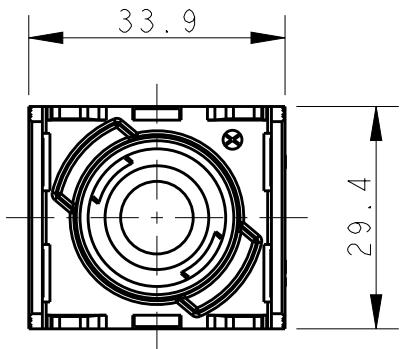


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL	18SEP2017	YC	CW

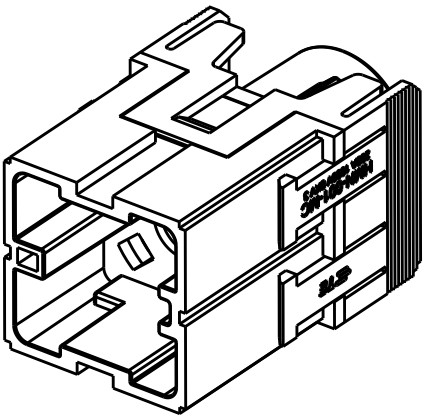

NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 1000V
RATED CURRENT: 200A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 8KV
POLLUTION DEGREE: 3
CONTACT RESISTANCE: $\leq 0.5m\Omega$
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 25mm²~70mm²
CONTACT TYPE: CRIMP TYPE.

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 1000V
额定电流: 100A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 8KV
污染等级: 3
接触电阻: $\leq 0.5m\Omega$
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 25mm²~70mm²
接线类型: 压接

T2111013101-007	HMN-001-MC	HMN-001 MALE MODULE INSERT, CRIMP HMN-001 冷压模块公插
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YORK CHEN 18SEP2017	TE Connectivity NAME HMN-001-MC		
DIMENSIONS: mm		CHK GINO YAO 18SEP2017			
		APVD CHRIS WANG 18SEP2017			
		PRODUCT SPEC 108-137057			
MATERIAL -	FINISH -	APPLICATION SPEC 114-137057	SIZE A3	CAGE CODE 00779	RESTRICTED TO -
		WEIGHT -	DRAWING NO T2111013101007		
		CUSTOMER DRAWING	SCALE 1:1	SHEET 1 OF 1	REV B