



NOTES:

1. ELECTRICAL:
 - A. IMPEDANCE: 50 OHM
 - B. FREQUENCY RANGE: DC - 6 GHz
 - C. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.
2. MECHANICAL:
 - A. DURABILITY: 500 CYCLES MIN.
 - B. TEMPERATURE RANGE: -65 °C TO +165 °C



REV.	DATE	ECR NO.	DESCRIPTION
NC	01/18/12	XXXXXX	INITIAL RELEASE
A	01/30/12	XXXXXX	REVISED LEGS/CONTACT LENGTH, ADDED $\phi 0.8 \pm 0.1$ TYP.(5)

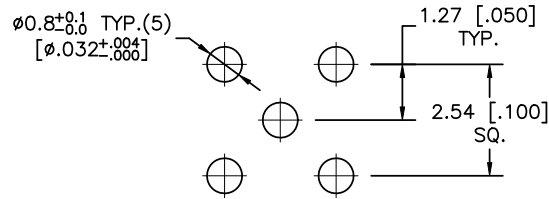

RECOMMENDED
MOUNTING PATTERN



SCALE 1.000

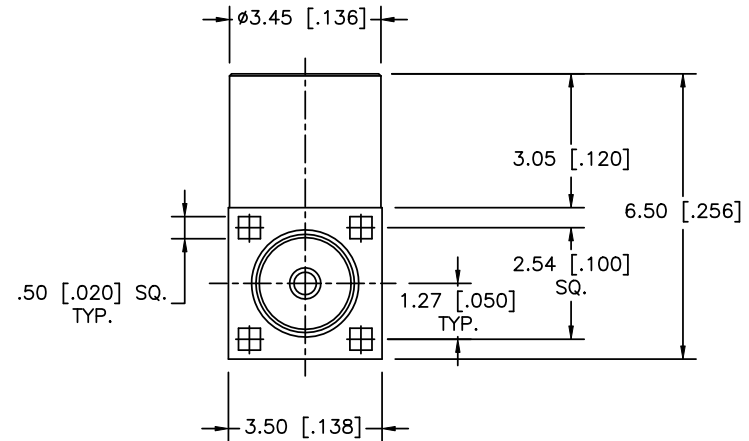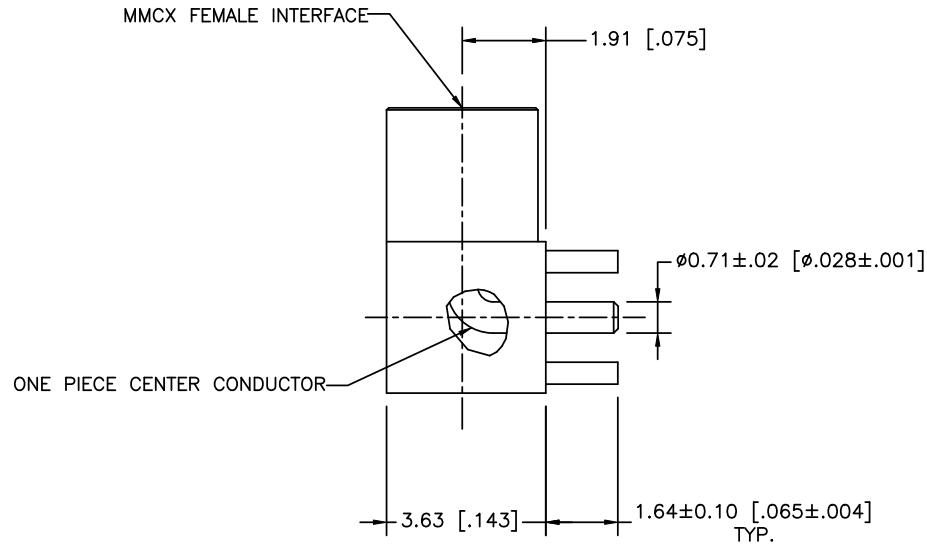

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex						
					DRAWN T.DENG		01/30/12								
					CHECKED										
					ISSUED				PART DESCRIPTION MMCX R/A P.C.B JACK						
					SHEET 1 OF 1										
					CAD FILE		C:/CONNEX/262105-11.DWG		PART NO. 262105-11						
DWG. NO.		262105-11.DWG		REV.		A		SIZE		A		SCALE		NA	

3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	2
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	2
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY