

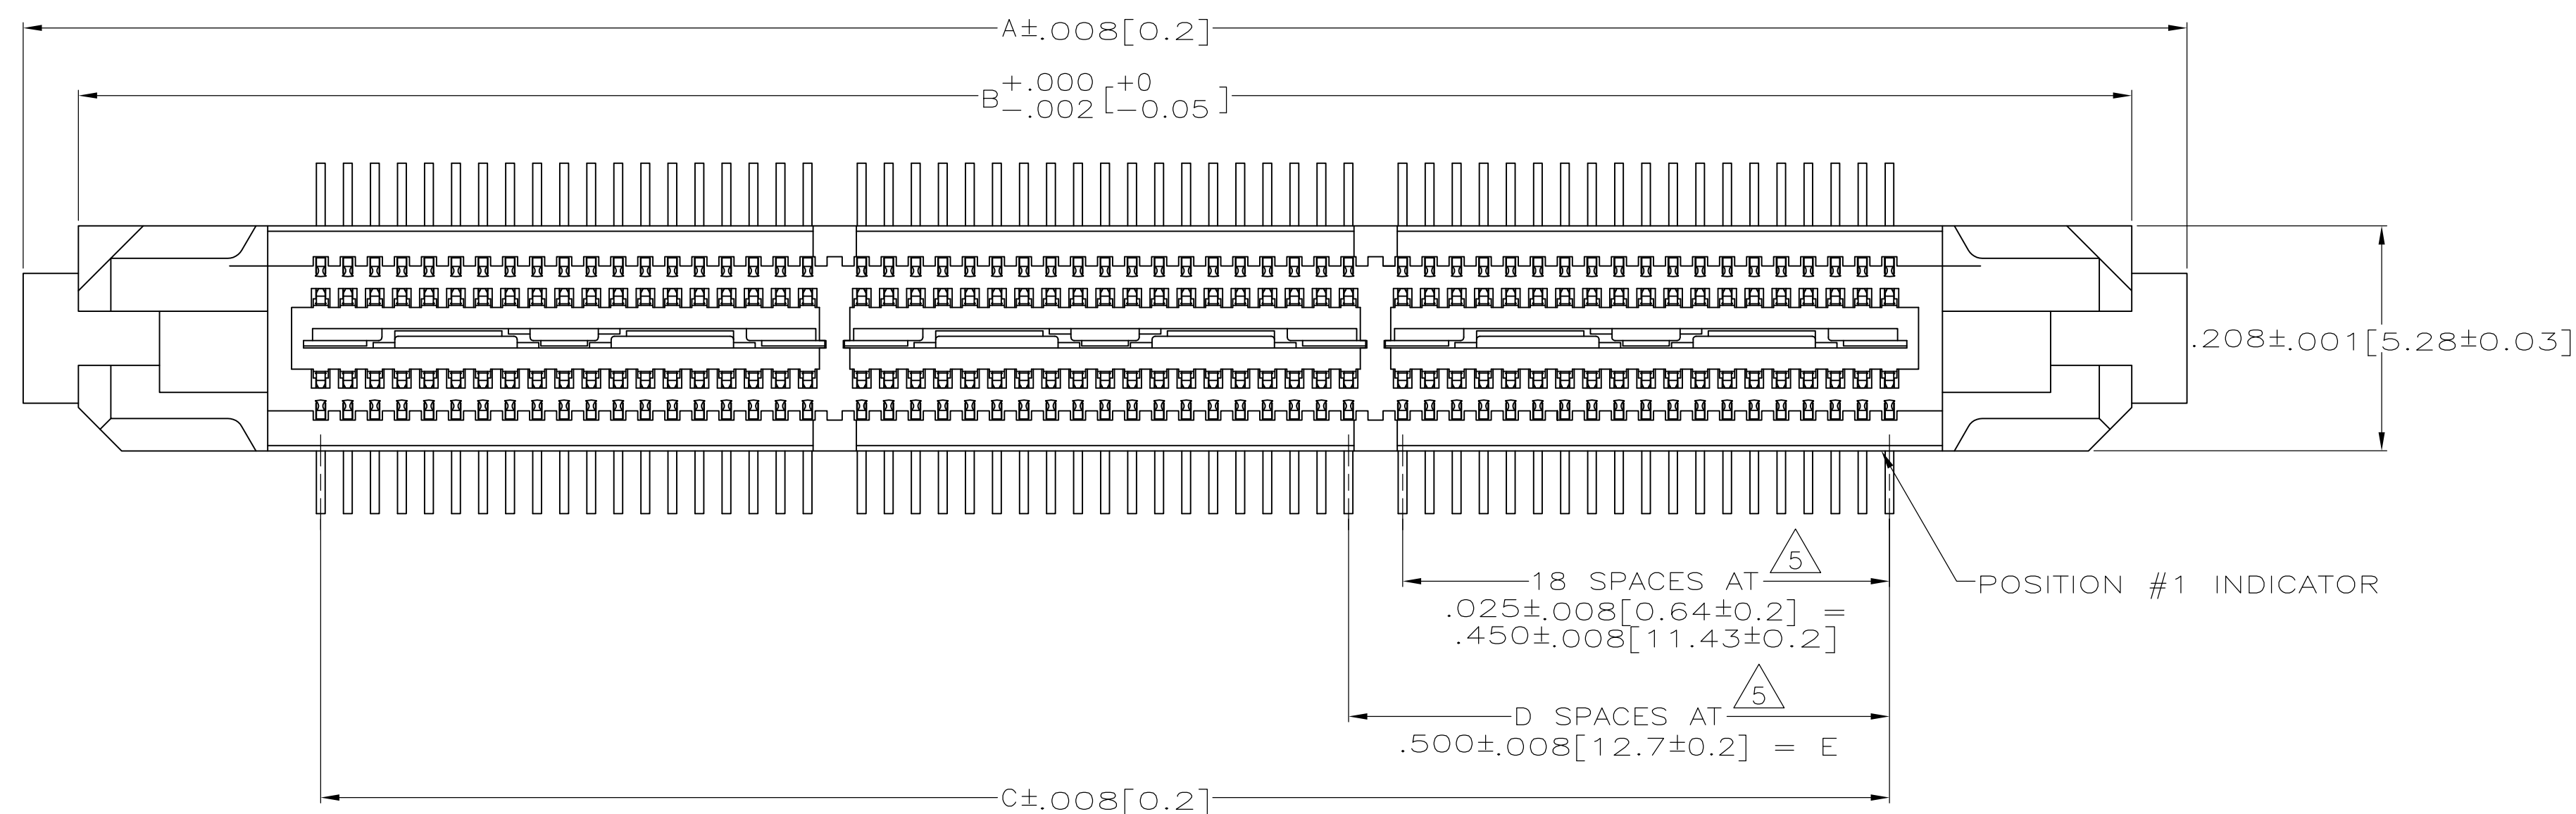
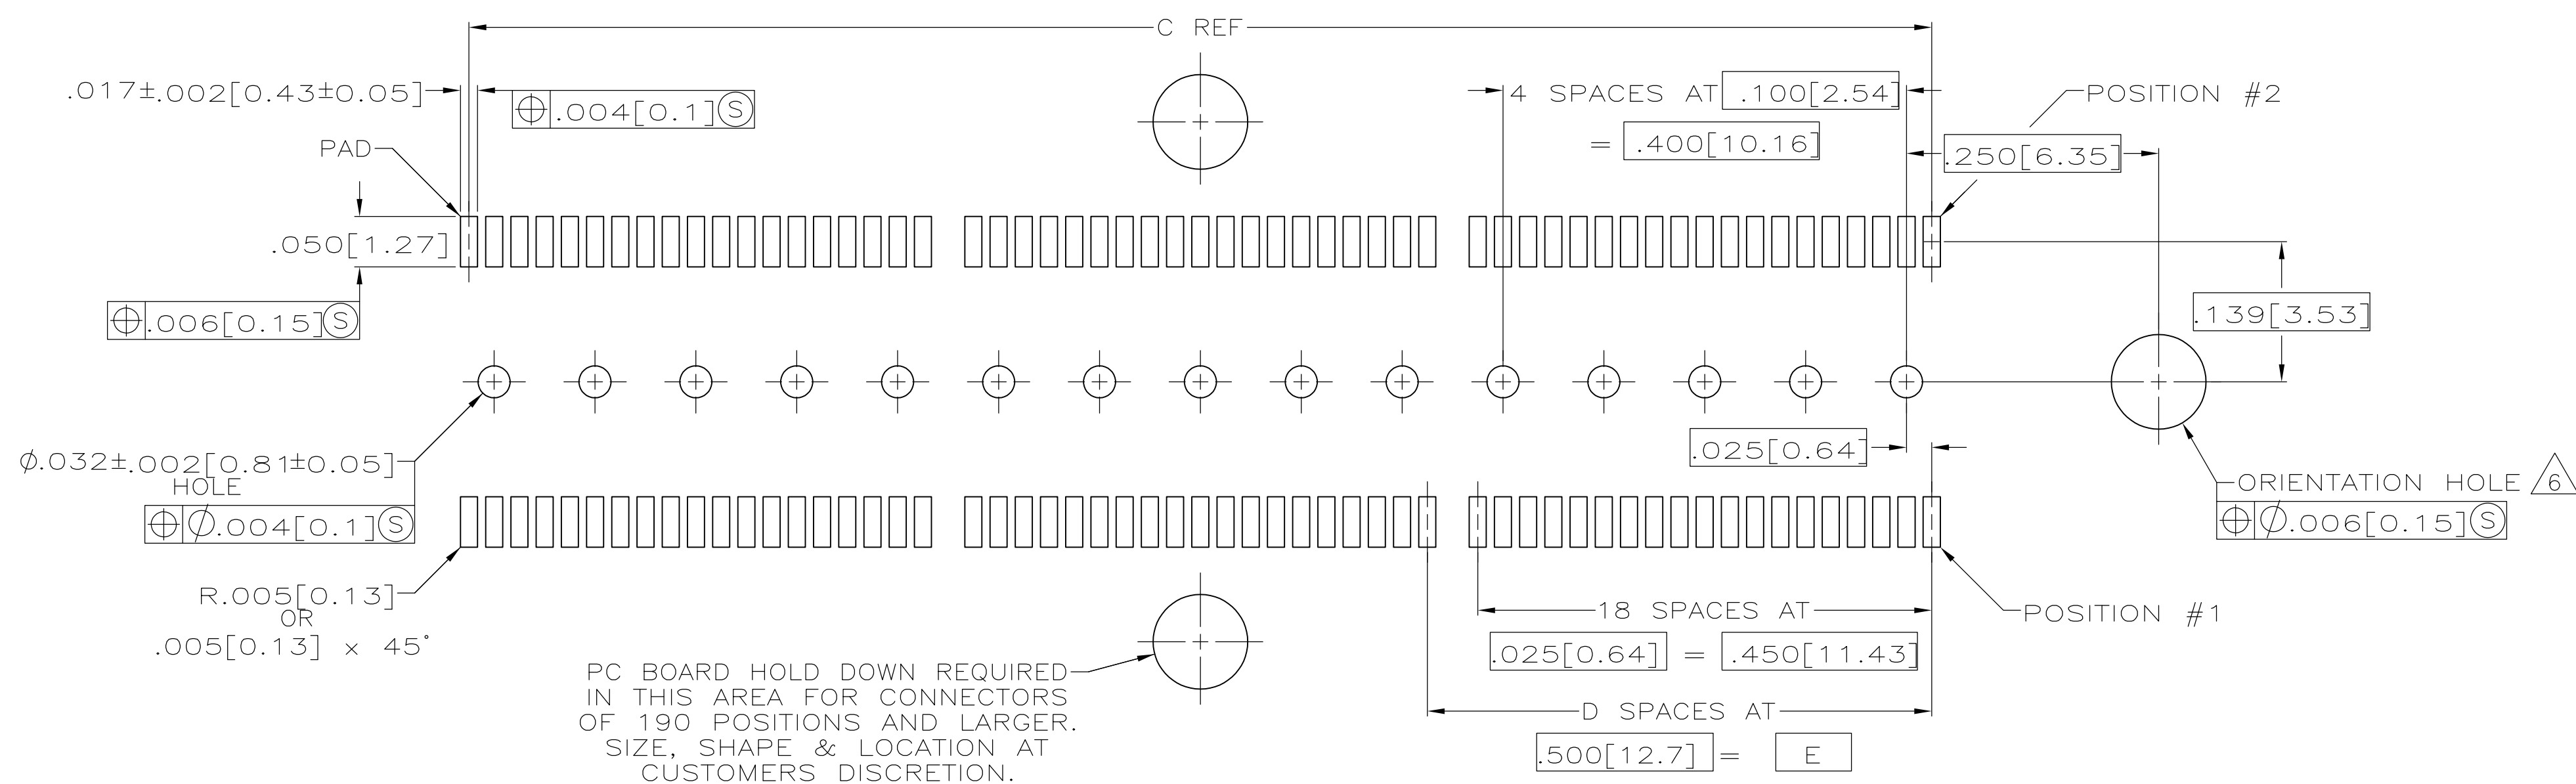


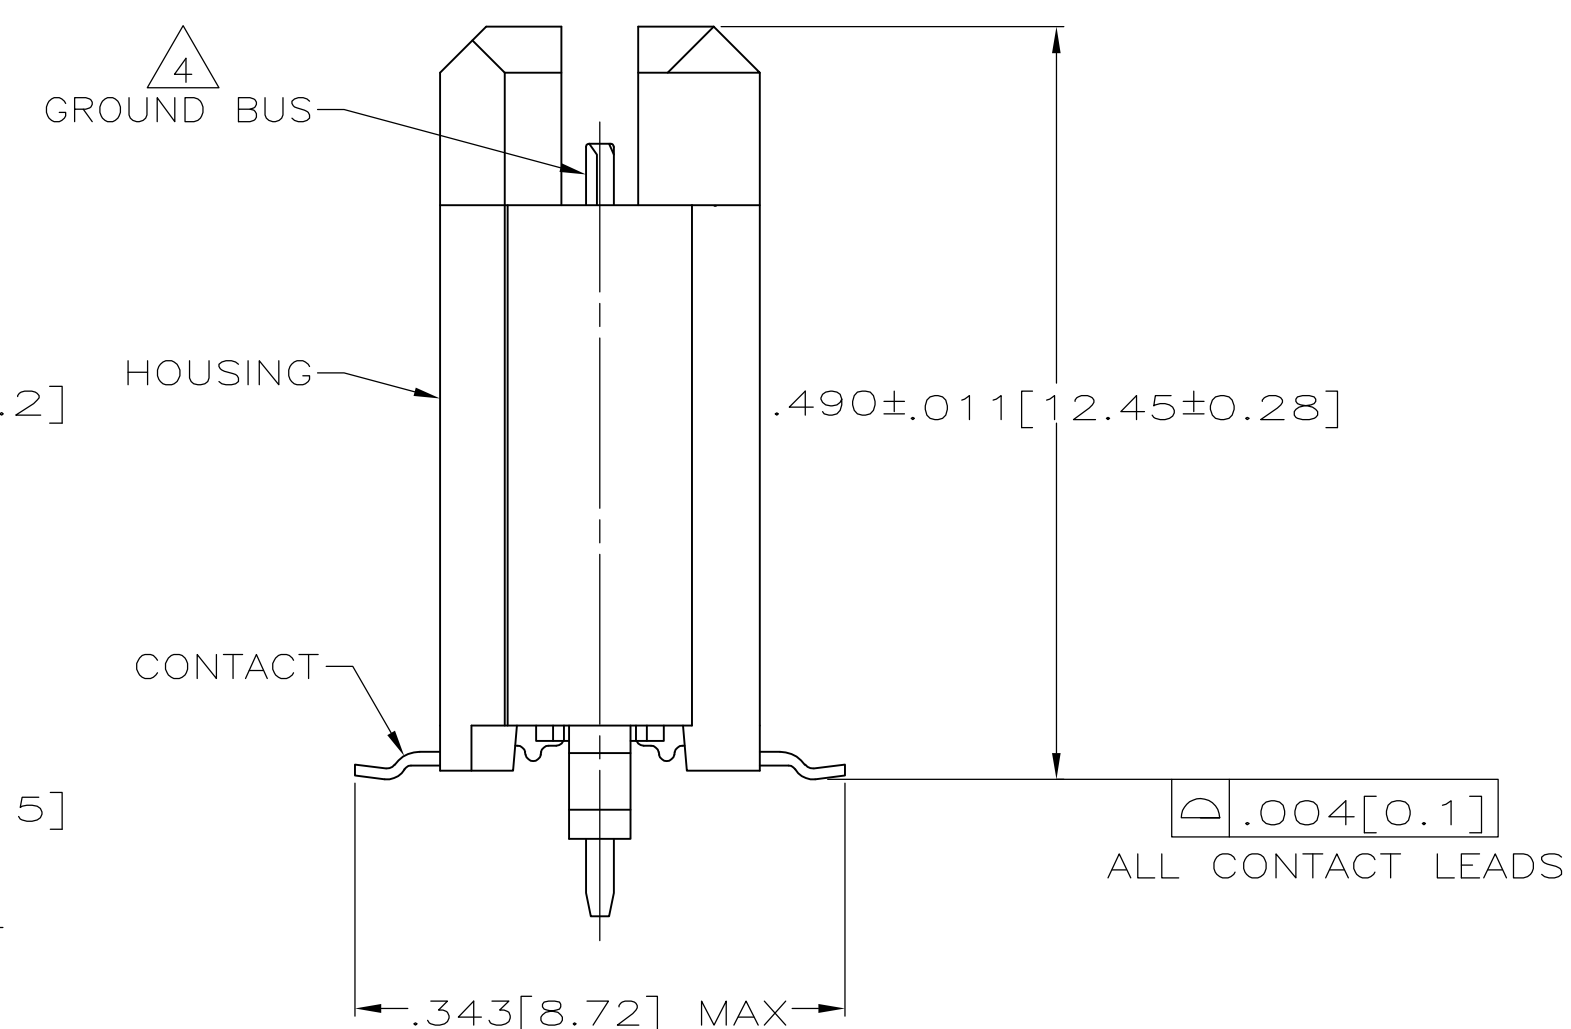


- 1 HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
CONTACTS: HIGH RELIABILITY COPPER ALLOY.
GROUND BUSES: BRASS,UNS C26000
- 2 CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL
OVER, MATING SURFACE PLATED TO MEET LEVEL 2
PERFORMANCE REQUIREMENTS OF TE PRODUCT
SPECIFICATION 108-1422, SOLDER TAILS PLATED
TIN-LEAD.
- 3 DATE CODE MARKED IN AREA INDICATED ON SAME SIDE
AS POSITION #1.
- 4 ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- 5 TOLERANCE NON-ACCUMULATIVE.
- 6 FOR STANDARD APPLICATIONS, ORIENTATION HOLE TO BE
 $\phi .094 \pm .002 [2.39 \pm .05]$.
FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE
 $\phi .079 \pm .001 [2.00 \pm .03]$.

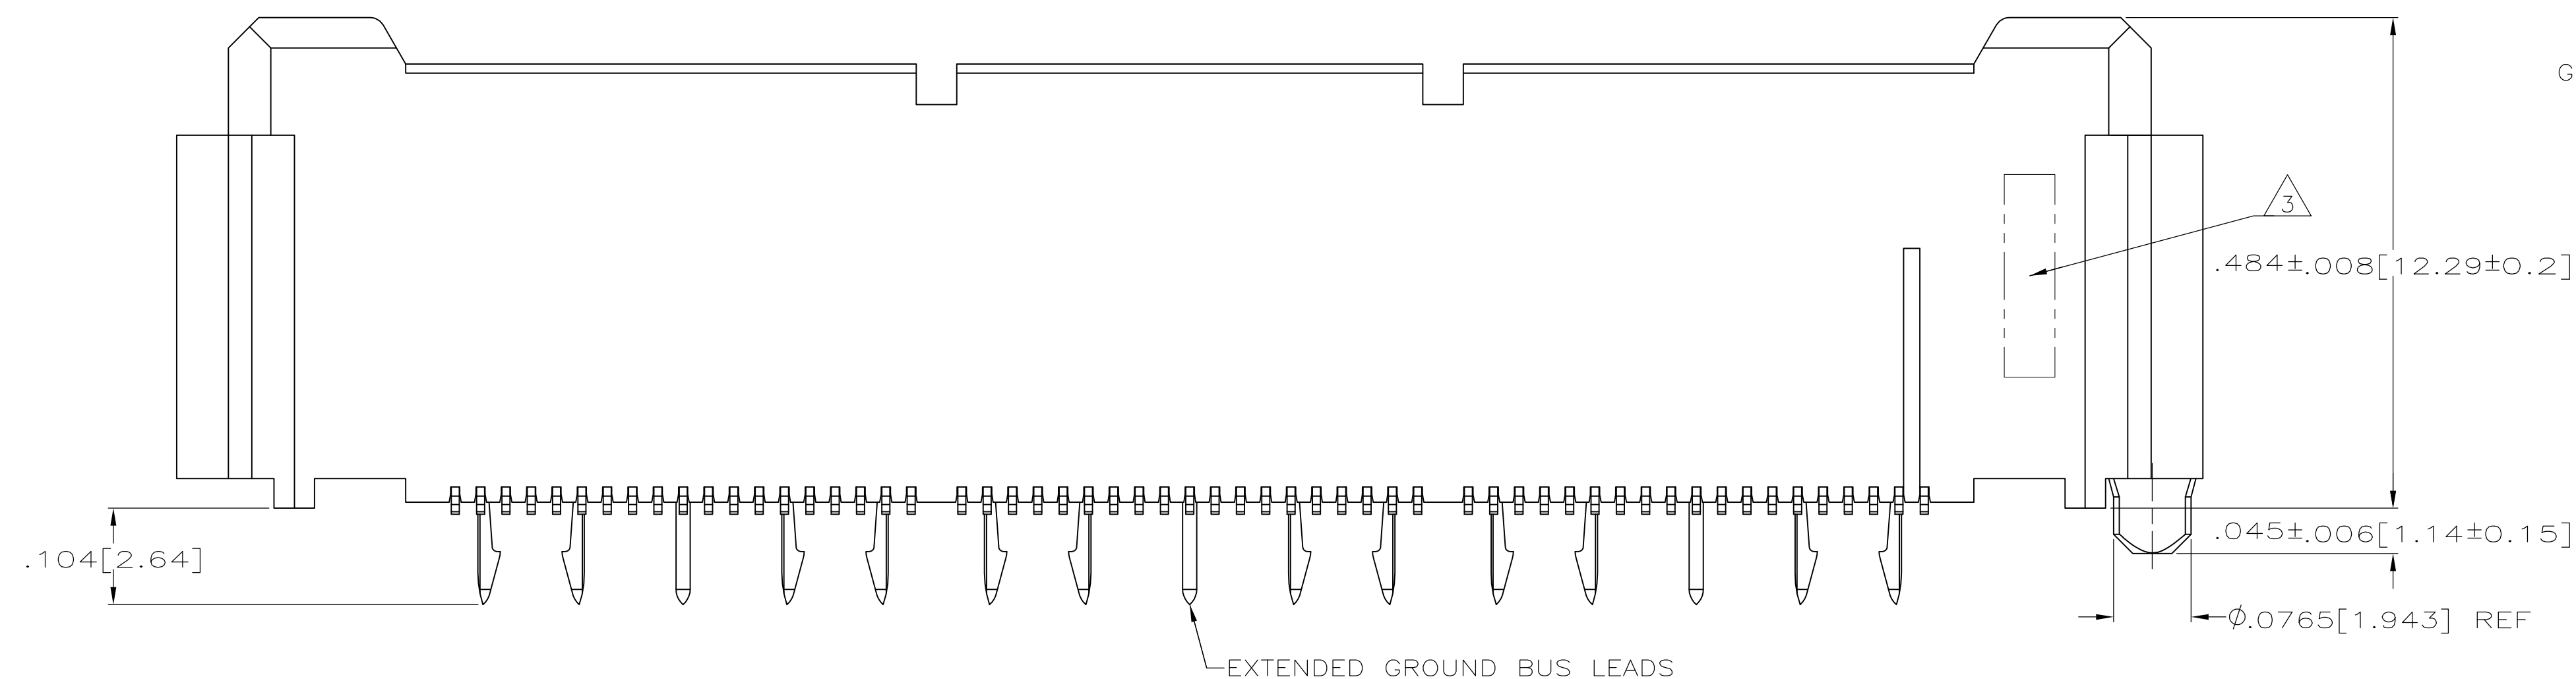

RECOMMENDED PC BOARD LAYOUT
(VIEWED FROM CONNECTOR SIDE)

OBSOLETE	3.000[76.2]	6	3.450[87.63]	3.898[99]	4.000[101.6]	266	767057-7
	2.500[63.5]	5	2.950[74.93]	3.398[86.31]	3.500[88.9]	228	767057-6
	2.000[50.8]	4	2.450[62.23]	2.898[73.61]	3.000[76.2]	190	767057-5
	1.500[38.1]	3	1.950[49.53]	2.398[60.91]	2.500[63.5]	152	767057-4
	1.000[25.4]	2	1.450[36.83]	1.898[48.21]	2.000[50.8]	114	767057-3
	.500[12.7]	1	.950[24.13]	1.398[35.51]	1.500[38.1]	76	767057-2
	.000[0]	0	.450[11.43]	.898[22.81]	1.000[25.4]	38	767057-1
	E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J GERACE CHK P MATAR		23AU096 23AU096		 TE Connectivity	
DIMENSIONS: INCHES[mm]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME		PLUG ASSEMBLY, .495[12.57] VERTICAL, .025[0.64]CL, GULL WING LEADS, MICTOR	
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005[0.13] 4 PLC ± - ANGLES ± -		APVD A MONK PRODUCT SPEC 108-1422 APPLICATION SPEC 114-11004		PLUG ASSEMBLY, .495[12.57] VERTICAL, .025[0.64]CL, GULL WING LEADS, MICTOR -	
MATERIAL		FINISH		WEIGHT		RESTRICTED TO	
				-		-	
CUSTOMER DRAWING				SIZE A1		CAGE CODE 00779	
				DRAWING NO C-767057		SCALE 8:1	
				SHEET 1 OF 1		REV S	