

CATALOG LISTING

1EN414-R

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-21754

CHECK

REVISIONS

A PR 21754

JJA 29 AUG 95

B C083069

JJA 25 NOV 96

C 0047679

KNR 27 JAN 09

CHECK

CMH 27 JAN 09

CHECK

CMH 27 JAN 09

CHECK

31AUG95

CHECK

TSM

CHECK

29AUG95

RASTER





DRAWN

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH — ENCLOSED

CATALOG LISTING
1EN414-R

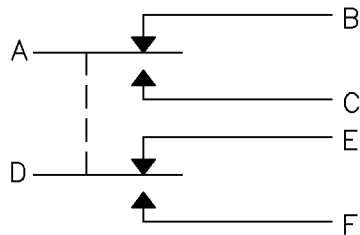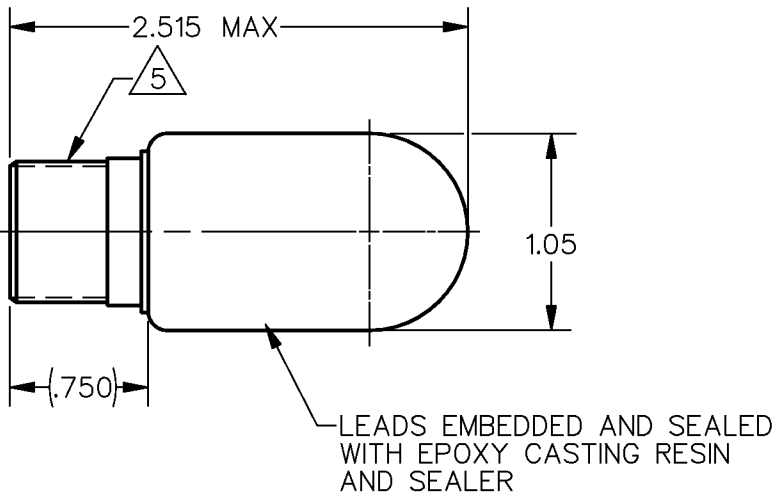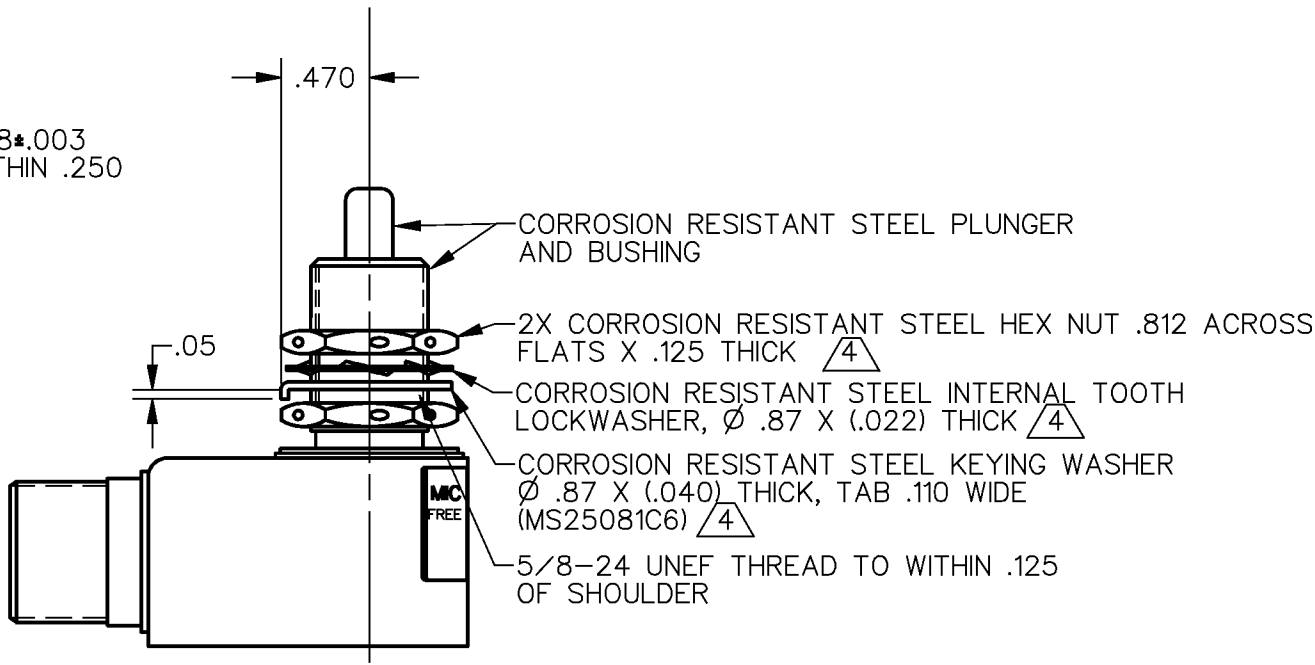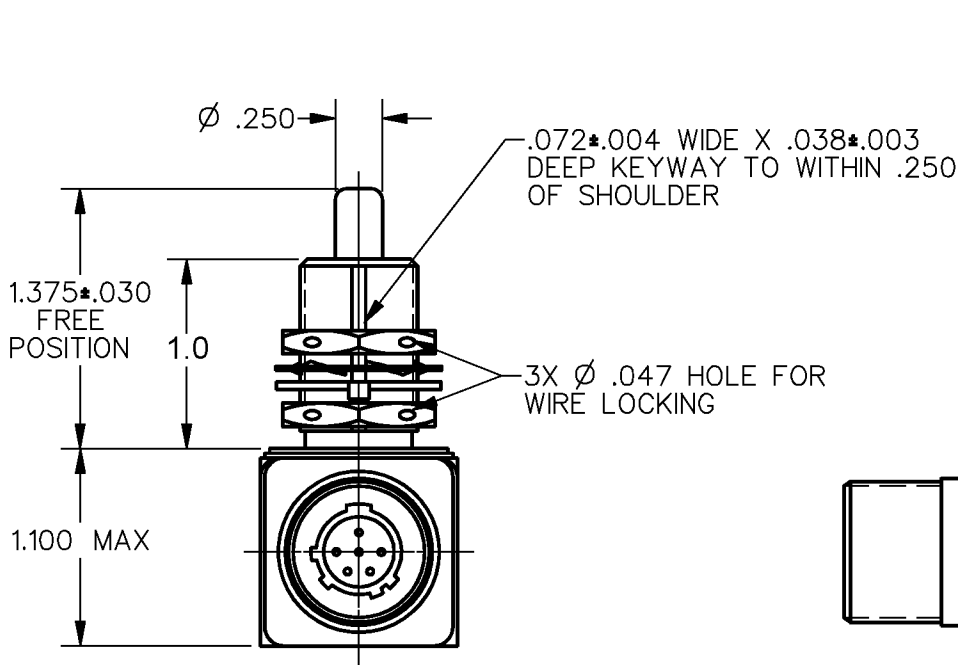

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE ——— 4 LB NOM	CONTACT ARRANGEMENT 2X S P D T
FULL OVERTRAVEL FORCE — 17 LB MAX	1
RELEASE FORCE ——— 2 LB MIN	28 VDC
PRETRAVEL ——— .040 MAX	SEA LEVEL 50,000 FT.
DIFFERENTIAL TRAVEL — .020 MAX	RES 1 1
OVERTRAVEL ——— .250 MIN	IND .5 .5

THIRD ANGLE PROJECTION
SCALE NONE
DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm -$
WEIGHT 5.6 OZ MAX

- NOTES
- 1 GOLD CONTACT BASIC SWITCHES
 - 2 — SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
 - 3 — CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
 - 4 HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805
 - 5 D38999/25YB98PN
 - 6 COINCIDENCE OF OPERATING AND RELEASING POINTS: $.010$ OF PLUNGER TRAVEL

ANSI Y14.5M-1982 APPLIES