

| SIGN | DATE | DESCRIPTION | APPROVER |
|------|------|-------------|----------|
| △    |      |             |          |
| △    |      |             |          |


THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

### Material

- Item ① Insulating body: Thermoplastic ( UL94V-0 )
- Item ② Insulating lever: Thermoplastic ( UL94V-0 ) Orange RAL 2011/P
- Item ③ Spring clamp: Stainless steel Matte Tin plated.
- Item ④ Insulating cover: Thermoplastic ( UL94V-0 )
- Item ⑤ Terminal side body: Thermoplastic (UL94V-0)

Electrical: cULus

- Voltage rating: 150V
- Current rating: 2A
- Solid wire(AWG): 16-22
- Stranded wire(AWG): 16-22
- Wire strip length: 9.0-10.0mm
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +115°C
- Safety Approval:
- Critical dimension: ▽

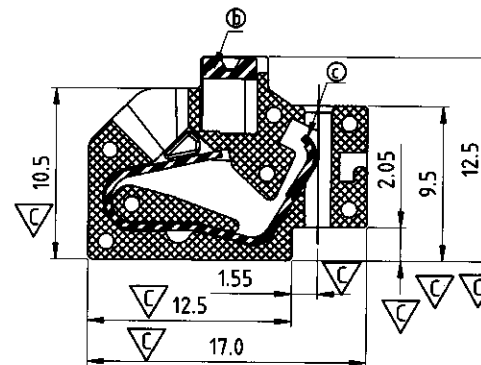

Section A-A


NY xx 10 x 0 xxxx G

No. OF POLES  
02: 2 POLES  
03: 3 POLES  
:  
24: 24 POLES

Body Color  
0 Black (RAL9005)  
2 Red (RAL3001/D)  
3 Orange(RAL2011/P)  
4 Yellow(RAL1018/A)  
5 Green(RAL6018/T)  
6 Blue (RAL5015/A)  
8 Grey(RAL7004/P)  
9 White(RAL1102)  
C Multiple colors

0000 Standard @ Logo  
000A Standard ANY Logo  
Any special item by  
customer request,  
please contact sales  
department.

RoHs compliant  
(lead<4%)  
in copper Alloy

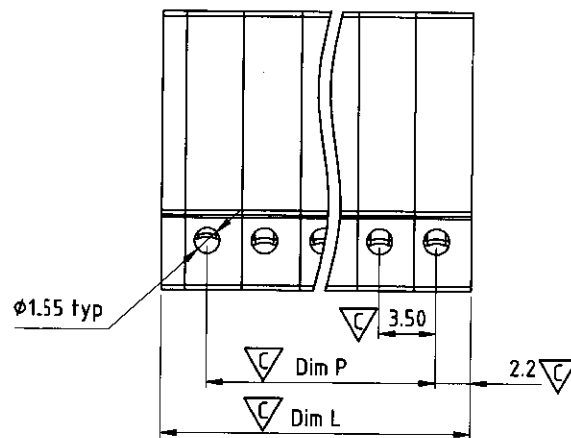

N = Number of poles

Dim L=(N×3.5)+1.5

Dim P=(N-1)×3.5

| POLES   | Dim L | Dim P |
|---------|-------|-------|
| 2p-6p   | ±0.15 | ±0.15 |
| 7p-12p  | ±0.2  | ±0.2  |
| 13p-18p | ±0.3  | ±0.3  |
| 19p-24p | ±0.4  | ±0.4  |

**ANYTEK**

**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|                                                                                       |         |                                 |                      |                                                                                       |         |             |         |            |
|---------------------------------------------------------------------------------------|---------|---------------------------------|----------------------|---------------------------------------------------------------------------------------|---------|-------------|---------|------------|
| TITLE                                                                                 |         | NY-3.5mm Series (W/O top cover) |                      |                                                                                       |         |             |         |            |
| PART NO.                                                                              |         | NYxx10x0xxxxG                   |                      |                                                                                       | DWG NO. |             | 8NY0003 |            |
| APPROVED                                                                              | CHECKED | DESIGNED                        | DRAWN                | CUST NO.                                                                              |         |             |         |            |
|  |         | Guoxue<br>2014.08.06            | Guoxue<br>2014.08.06 |  |         | Tolerance   |         | X. ±0.50   |
|                                                                                       |         |                                 |                      |                                                                                       |         | UNIT: mm    |         | X.X ±0.30  |
|                                                                                       |         |                                 |                      |                                                                                       |         | SCALE: NONE |         | X.XX ±0.10 |
|                                                                                       |         |                                 |                      | SHEET: 01/01                                                                          |         |             |         | REV: B     |