SIGN	DATE	DESCRIPTION	APPROVER
1			
2			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!



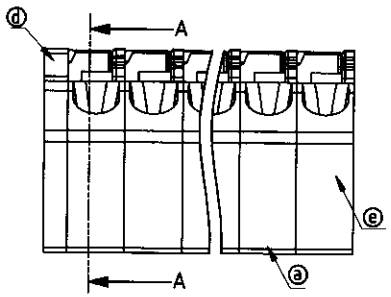

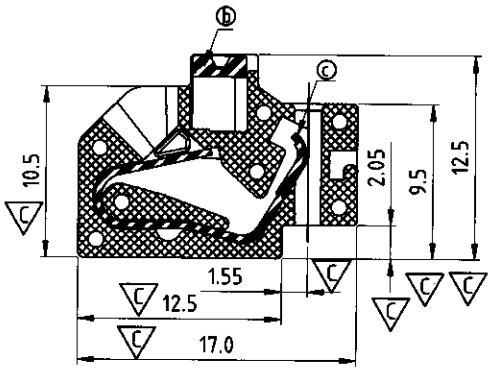

Section A-A

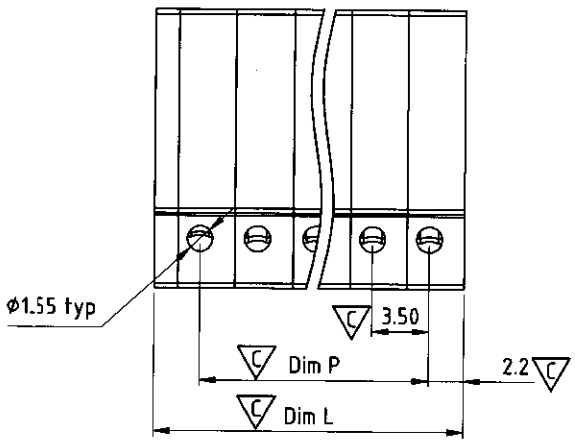

Material

- Item ⓐ Insulating body: Thermoplastic (UL94V-0)
- Item ⓑ Insulating lever: Thermoplastic (UL94V-0) Orange RAL 2011/P
- Item ⓒ Spring clamp: Stainless steel Matte Tin plated.
- Item ⓓ Insulating cover : Thermoplastic (UL94V-0)
- Item ⓔ Terminal side body: Thermoplastic (UL94V-0)

Electrical: cULus

- Voltage rating: 150V
- Current rating: 2A
- Solid wire(AWG): 16-22
- Stranded wire(AWG): 16-22
- Wire strip length: 9.0-10.0mm
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +115°C
- Safety Approval:
- Critical dimension: C

恩尼特克電子科技(深圳)有限公司 文管中心 2014.08.13 發行 ANYTEK INTERNATIONAL CO., LTD.

NY xx 10 x 0 xxxx G

- xx — No. OF POLES: 02: 2 POLES; 03: 3 POLES; ⋮ ; 24: 24 POLES
- 10 x 0 — Body Color: 0 Black (RAL9005); 2 Red (RAL3001/D); 3 Orange(RAL2011/P); 4 Yellow(RAL1018/A); 5 Green(RAL6018/T); 6 Blue (RAL5015/A); 8 Grey(RAL7004/P); 9 White(RAL1102); C Multiple colors
- xxxx — 0000 Standard @ Logo; 000A Standard ANY Logo; Any special item by customer request, please contact sales department.
- G — RoHs compliant (lead<4%) in copper Alloy

N = Number of poles

Dim L=(Nx3.5)+1.5

Dim P=(N-1)x3.5

POLES	Dim L	Dim P
2p-6p	±0.15	±0.15
7p-12p	±0.2	±0.2
13p-18p	±0.3	±0.3
19p-24p	±0.4	±0.4

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	NY-3.5mm Series (W/O top cover)				
PART NO.	NYxx10x0xxxxG			DWG NO.	8NY0003
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Guoxue 2014.08.06	Guoxue 2014.08.06	UNIT: mm / SCALE: NONE / SHEET: 01/01 / REV.: B	

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°