
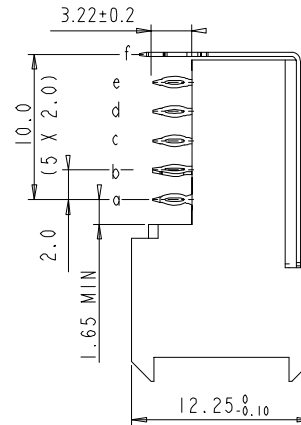
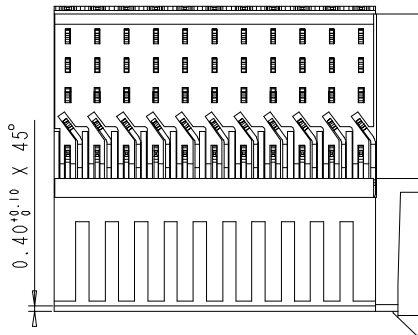


LAY-OUT
P.C.B.- HOLE

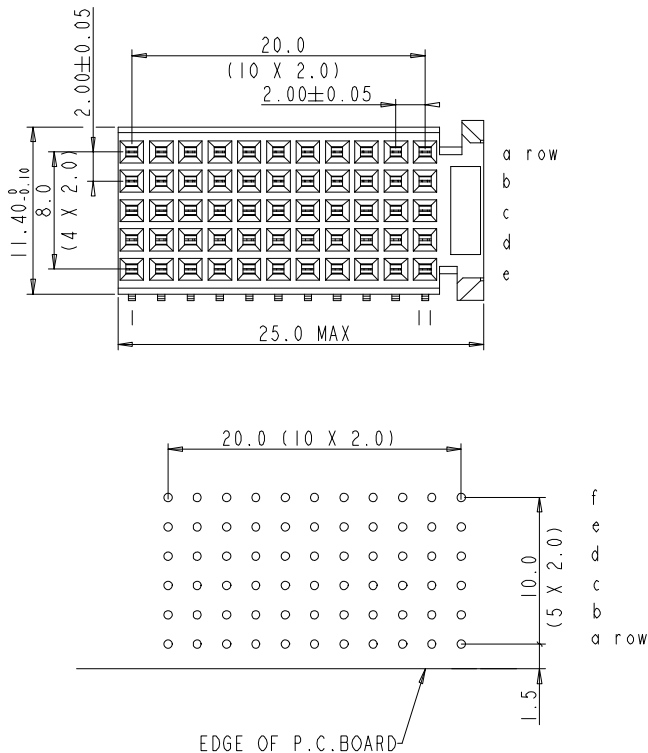


PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE : 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE 20 mΩ MAX
INSERTION FORCE : 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN/CONT
INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES 1. " " LEAD FREE INDICATOR : LF=LEAD FREE
PERFORMANCE LEVEL INDICATOR
(REF DWG NO.BSC .201844.003)
- THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
 - FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
BS.A.201572.001
 - THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 02	KN	14-09-01
B	DG05-0278	Kason	02-08-05
C	DG10-0110	NZ	2010.9.3
-	-	-	-
-	-	-	-
-	-	-	-

Material			Spec ref				
Mat code			✓	tolerance	projection		
Heat treat				1DEC ± 0.2 1DEC 2DEC ± 0.1 2DEC ANGLES ± 1° HOEKEN			
Plating/Finish							
Dr	M.Fret	17-02-00			size	Scale	
Eng			Product family MILLIPACS		A4	2.000	
Chr			Model Name			ECN	
Appr			Model Revision			REL Level	
		title			dwg no		Rev.
		MPACS 5+2R RA RCP CONN TYPE C			BSC201444047		C
Pro/E file	catalog no	HM2R30PA510F----			CUSTOMER DRAWING		sheet 1 of 1