
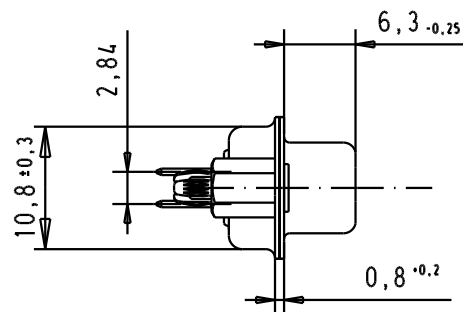


D



C

B

A

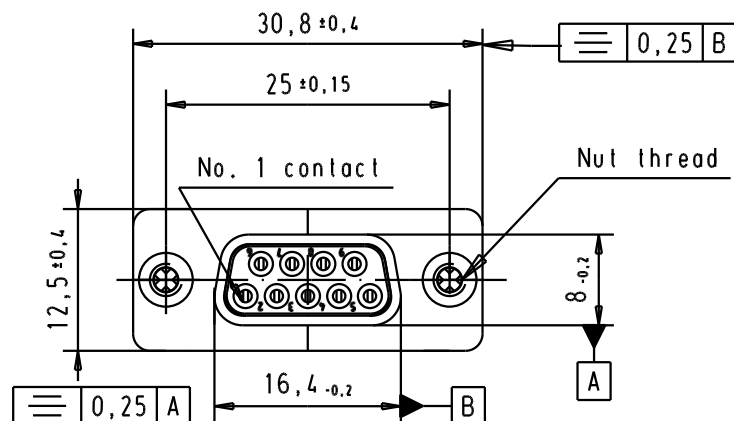

PCB Layout, Component side
thickness 1.6 mm

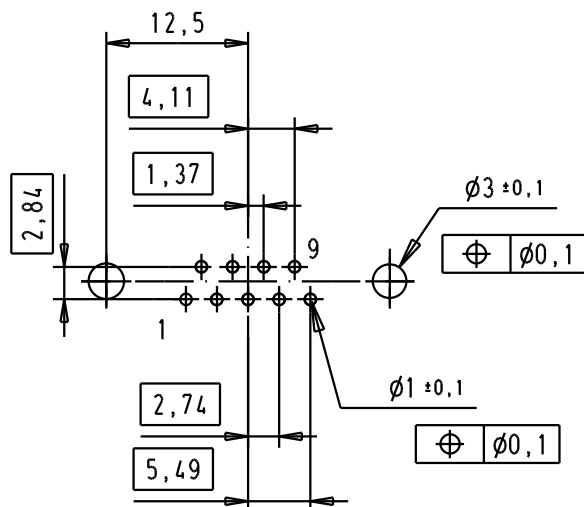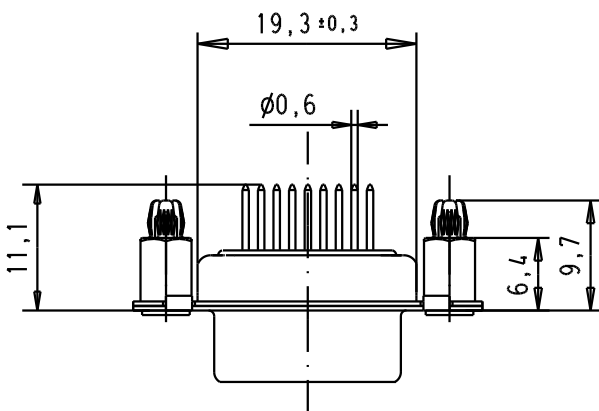


SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	$47\text{pf} \pm 20\%$
Working Voltage	100v
Current Rating	7,5A
Insulation Resistance	$>1\text{G}\Omega$

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

	Dat.	Name
Detail.	8-JUL-02	CV
Insp.		
Stand.		



D-Sub, female, straight,
9 Poles, solder pins,
tin plated shell with
spacer nuts and board-locks

Mo?Ms tab/
Scale

1.5:1

09641127216

M3

33094

04/10/05

JMDR

09641127215

UNC 4-40

31058

8-JUL-02

CV

Part number

Nut thread

Mod.

Dat.

Name

HARTING EURL
F-95972 Paris



TB 0964112721x

Sub.

Blatt / Page

2 / 3