



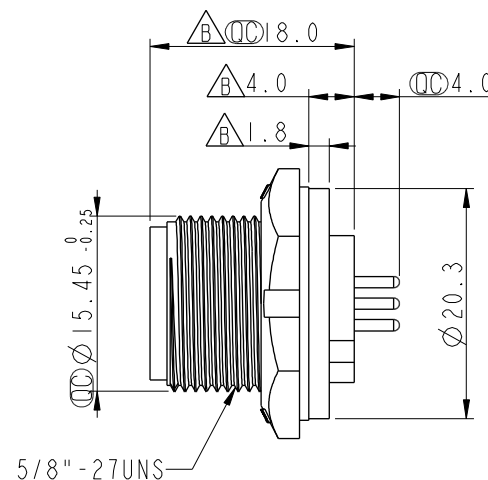
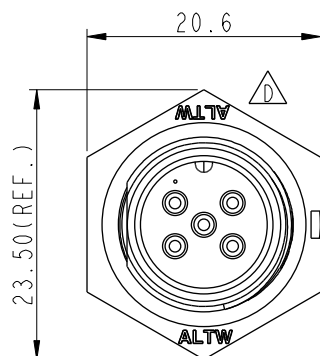



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-8B0506	2008/09/17	Shin	Add Note
D	LEN1730281	2017/03/20	Ruru	Change Logo
E	CI90273	2019/02/23	Ruru	Modify Note




5 Pin Male Connector
Male Pin PCB Layout



Pin Assignments
Front View

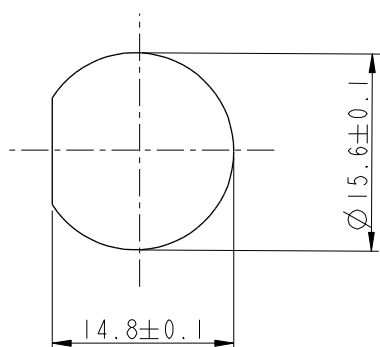

Recommended Panel Cut-out

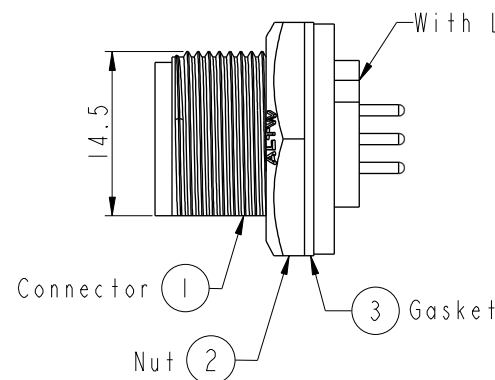

Note: $\triangle$ E

- * $\odot$ Important Dimension To Check.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

$\triangle$ C* Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 3.0mm

$\triangle$ C* Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.0mm

* Gasket and Nut are packed separately
in PE bags.

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE Standard Panel Screw 5Pin M Conn M Pin			
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. E	WC-REV. A.3	$\odot$ Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO. BD-05PMMP-SC7001	DRAWN BY Ruru	DATE 2019-02-23
DWG NO. BD-05PMMP-SC7001	CHECKED BY Rita	DATE 2019-02-23
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-02-23