
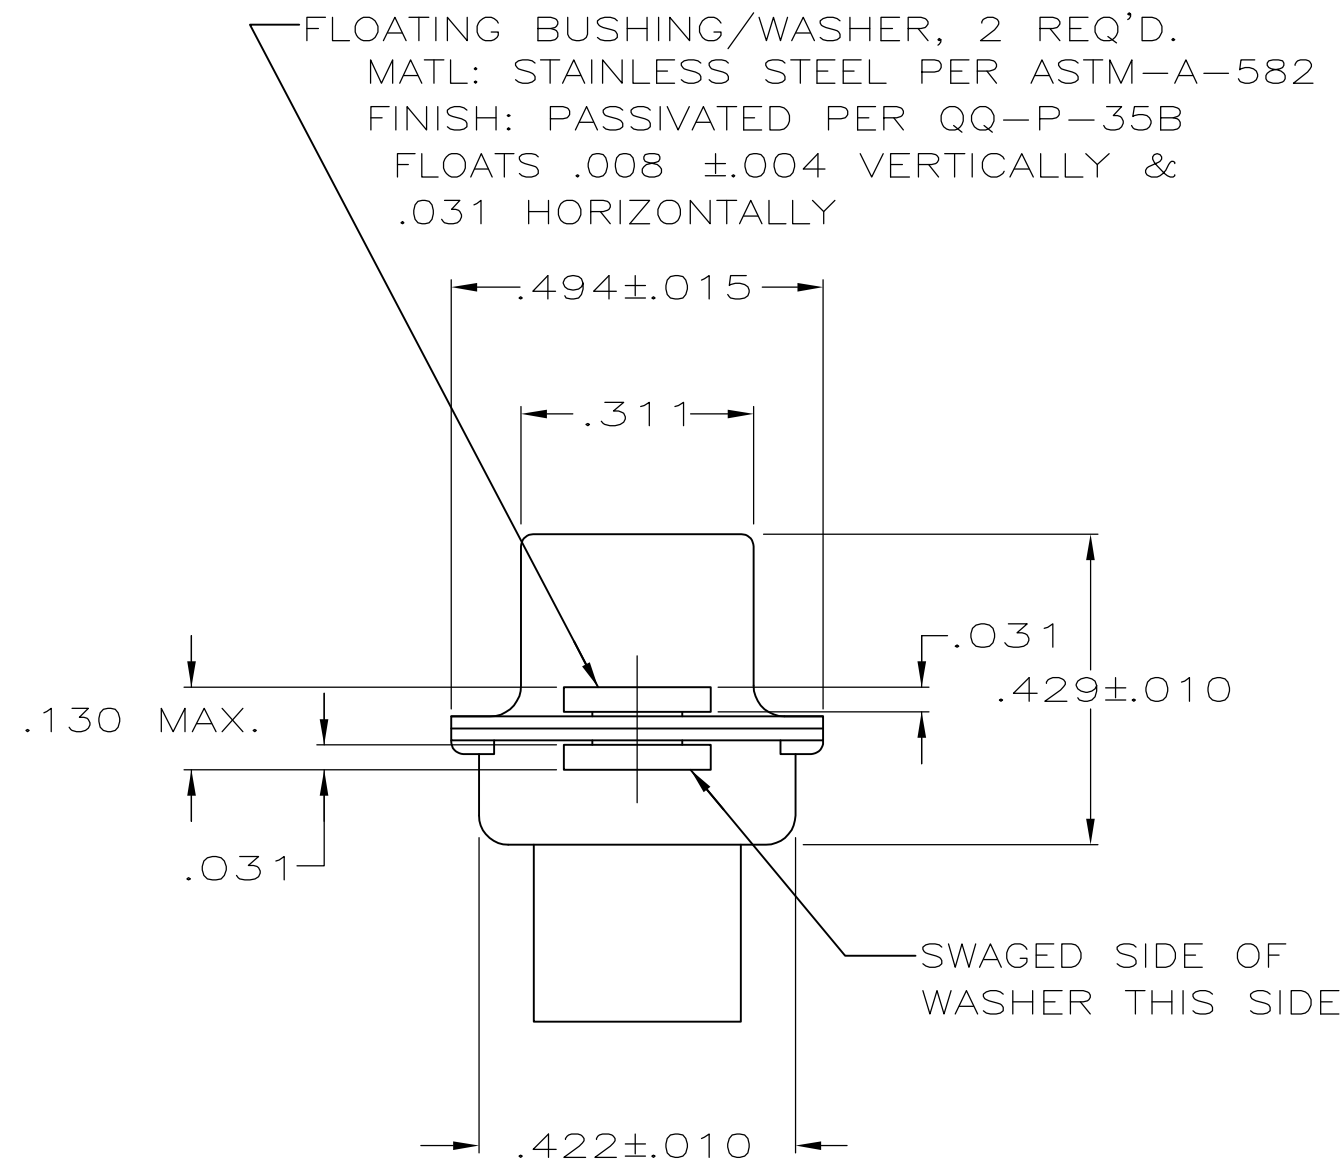
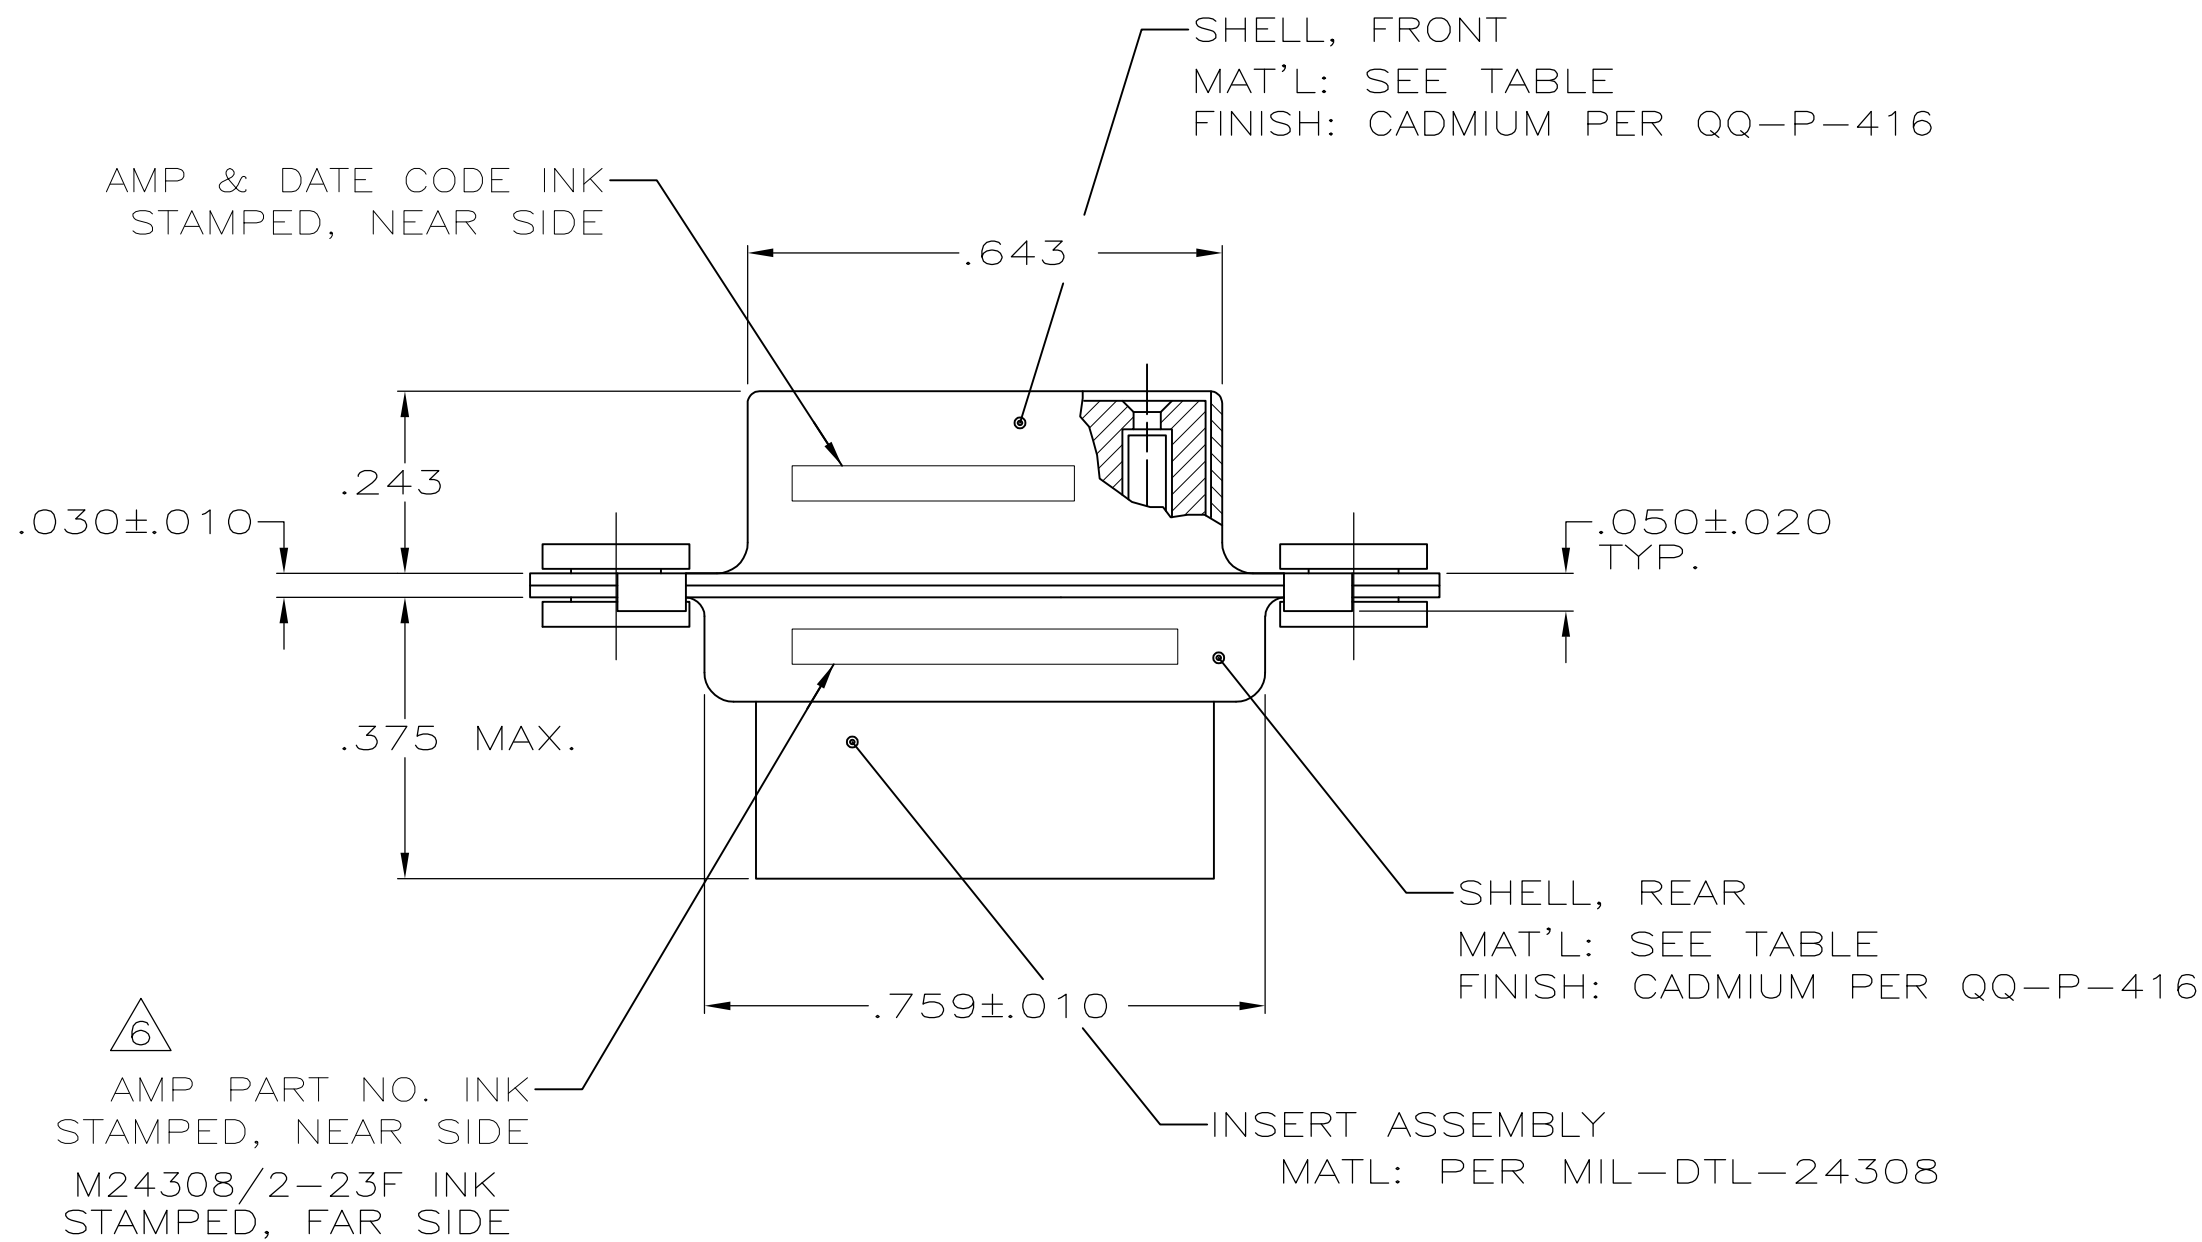


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			M	REV PER ECO-15-005911	20MAY15	KG	DM

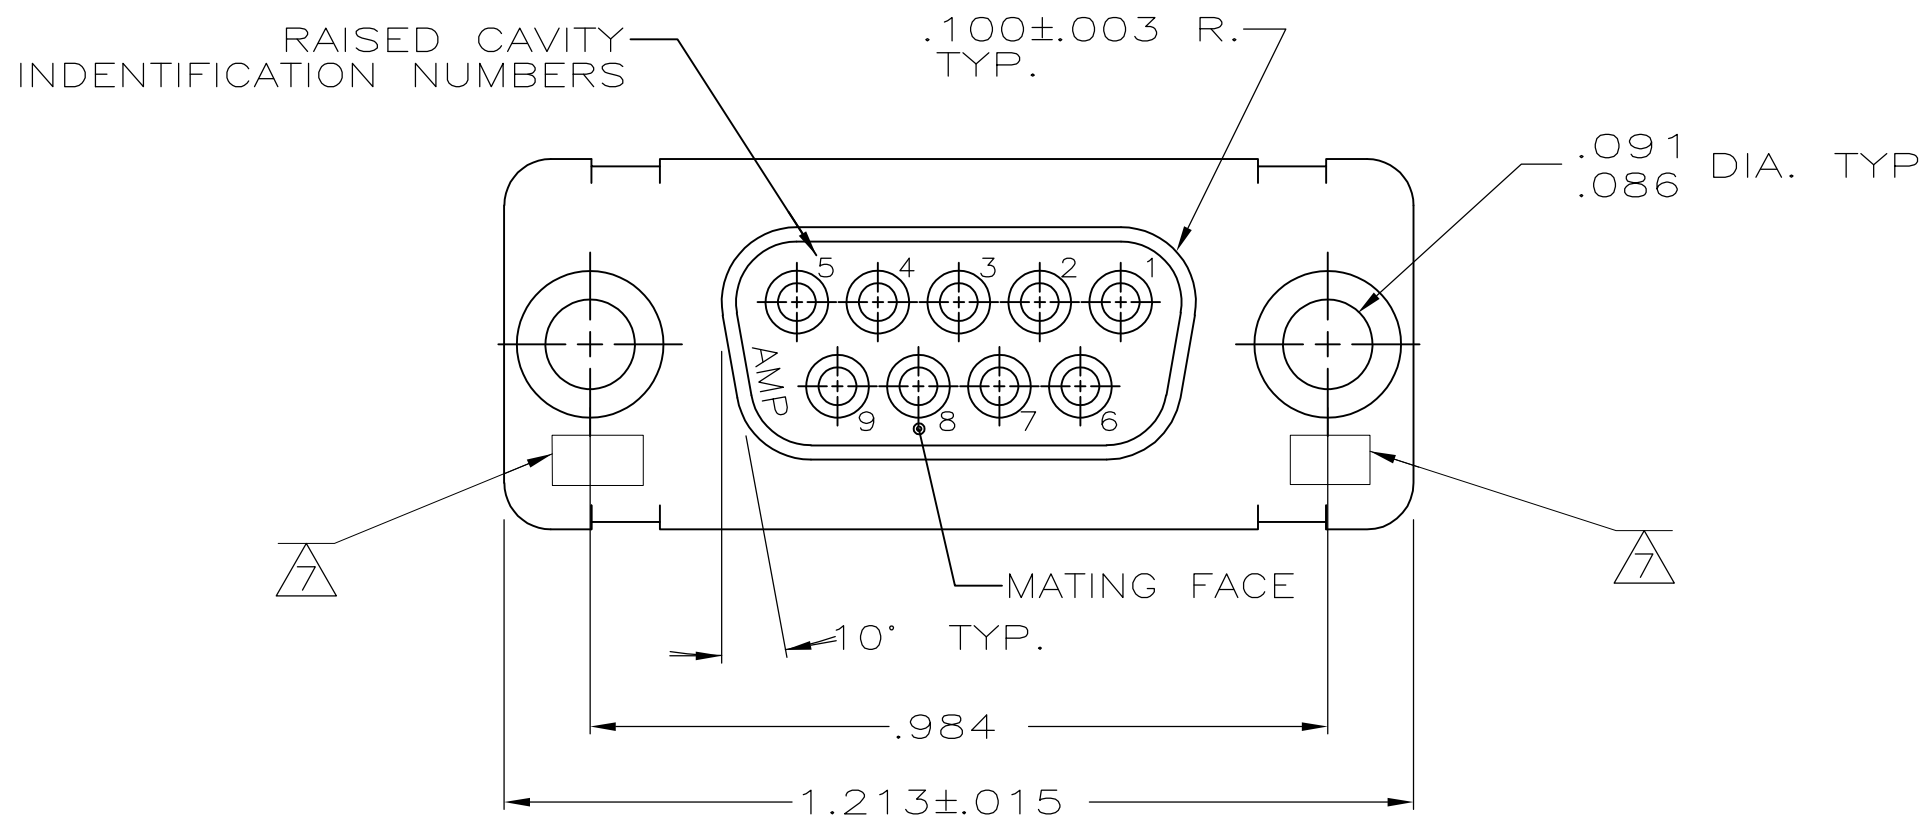

- THIS RCPT. IS DESIGNED TO CONFORM TO THE LATEST ISSUE OF MIL-C-24308
 - MAX WIRE INSUL TO BE USED WITH THIS RCPT IS .068 DIA
 - STAINLESS STEEL RETENTION CLIPS ARE INCLUDED IN INSERTS
 - PACKAGE STAMPED M24308/2-292F
 - THIS RCPT. WILL ACCEPT SIZE 20 SOCKET CONTACT M24308/10 OR AMP # 205090
- △ AMP PART NO. STAMPED ON CONNECTOR REPRESENTS KIT NUMBER WITH CONTACTS
- △ UL/CSA DESIGNATION STAMPED IN THIS AREA.

OBSOLETE	BRASS	205416-2
	STEEL PER ASTM-A-109	205416-1
	SHELL MAT'L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 12-9-87	 TE Connectivity							
		CHK FC BALLEW III 12-10-87								
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD —	NAME AMPLIMITE RCPT FOR SOCKET CONTACTS HI-DENSITY HDM-20 CONNECTOR SIZE 1 (9 POS) SERIES 109 WITH FLOAT BUSHINGS							
	0 PLC ± —	PRODUCT SPEC —								
	1 PLC ± —	—								
	2 PLC ± —	—								
	3 PLC ± .005	APPLICATION SPEC —								
	4 PLC ± —	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
MATERIAL	FINISH	WEIGHT —	A2	00779	C-205416	—				
SEE CALLOUTS	SEE CALLOUTS	CUSTOMER DRAWING			SCALE	4:1	SHEET	1 of 1	REV	M