


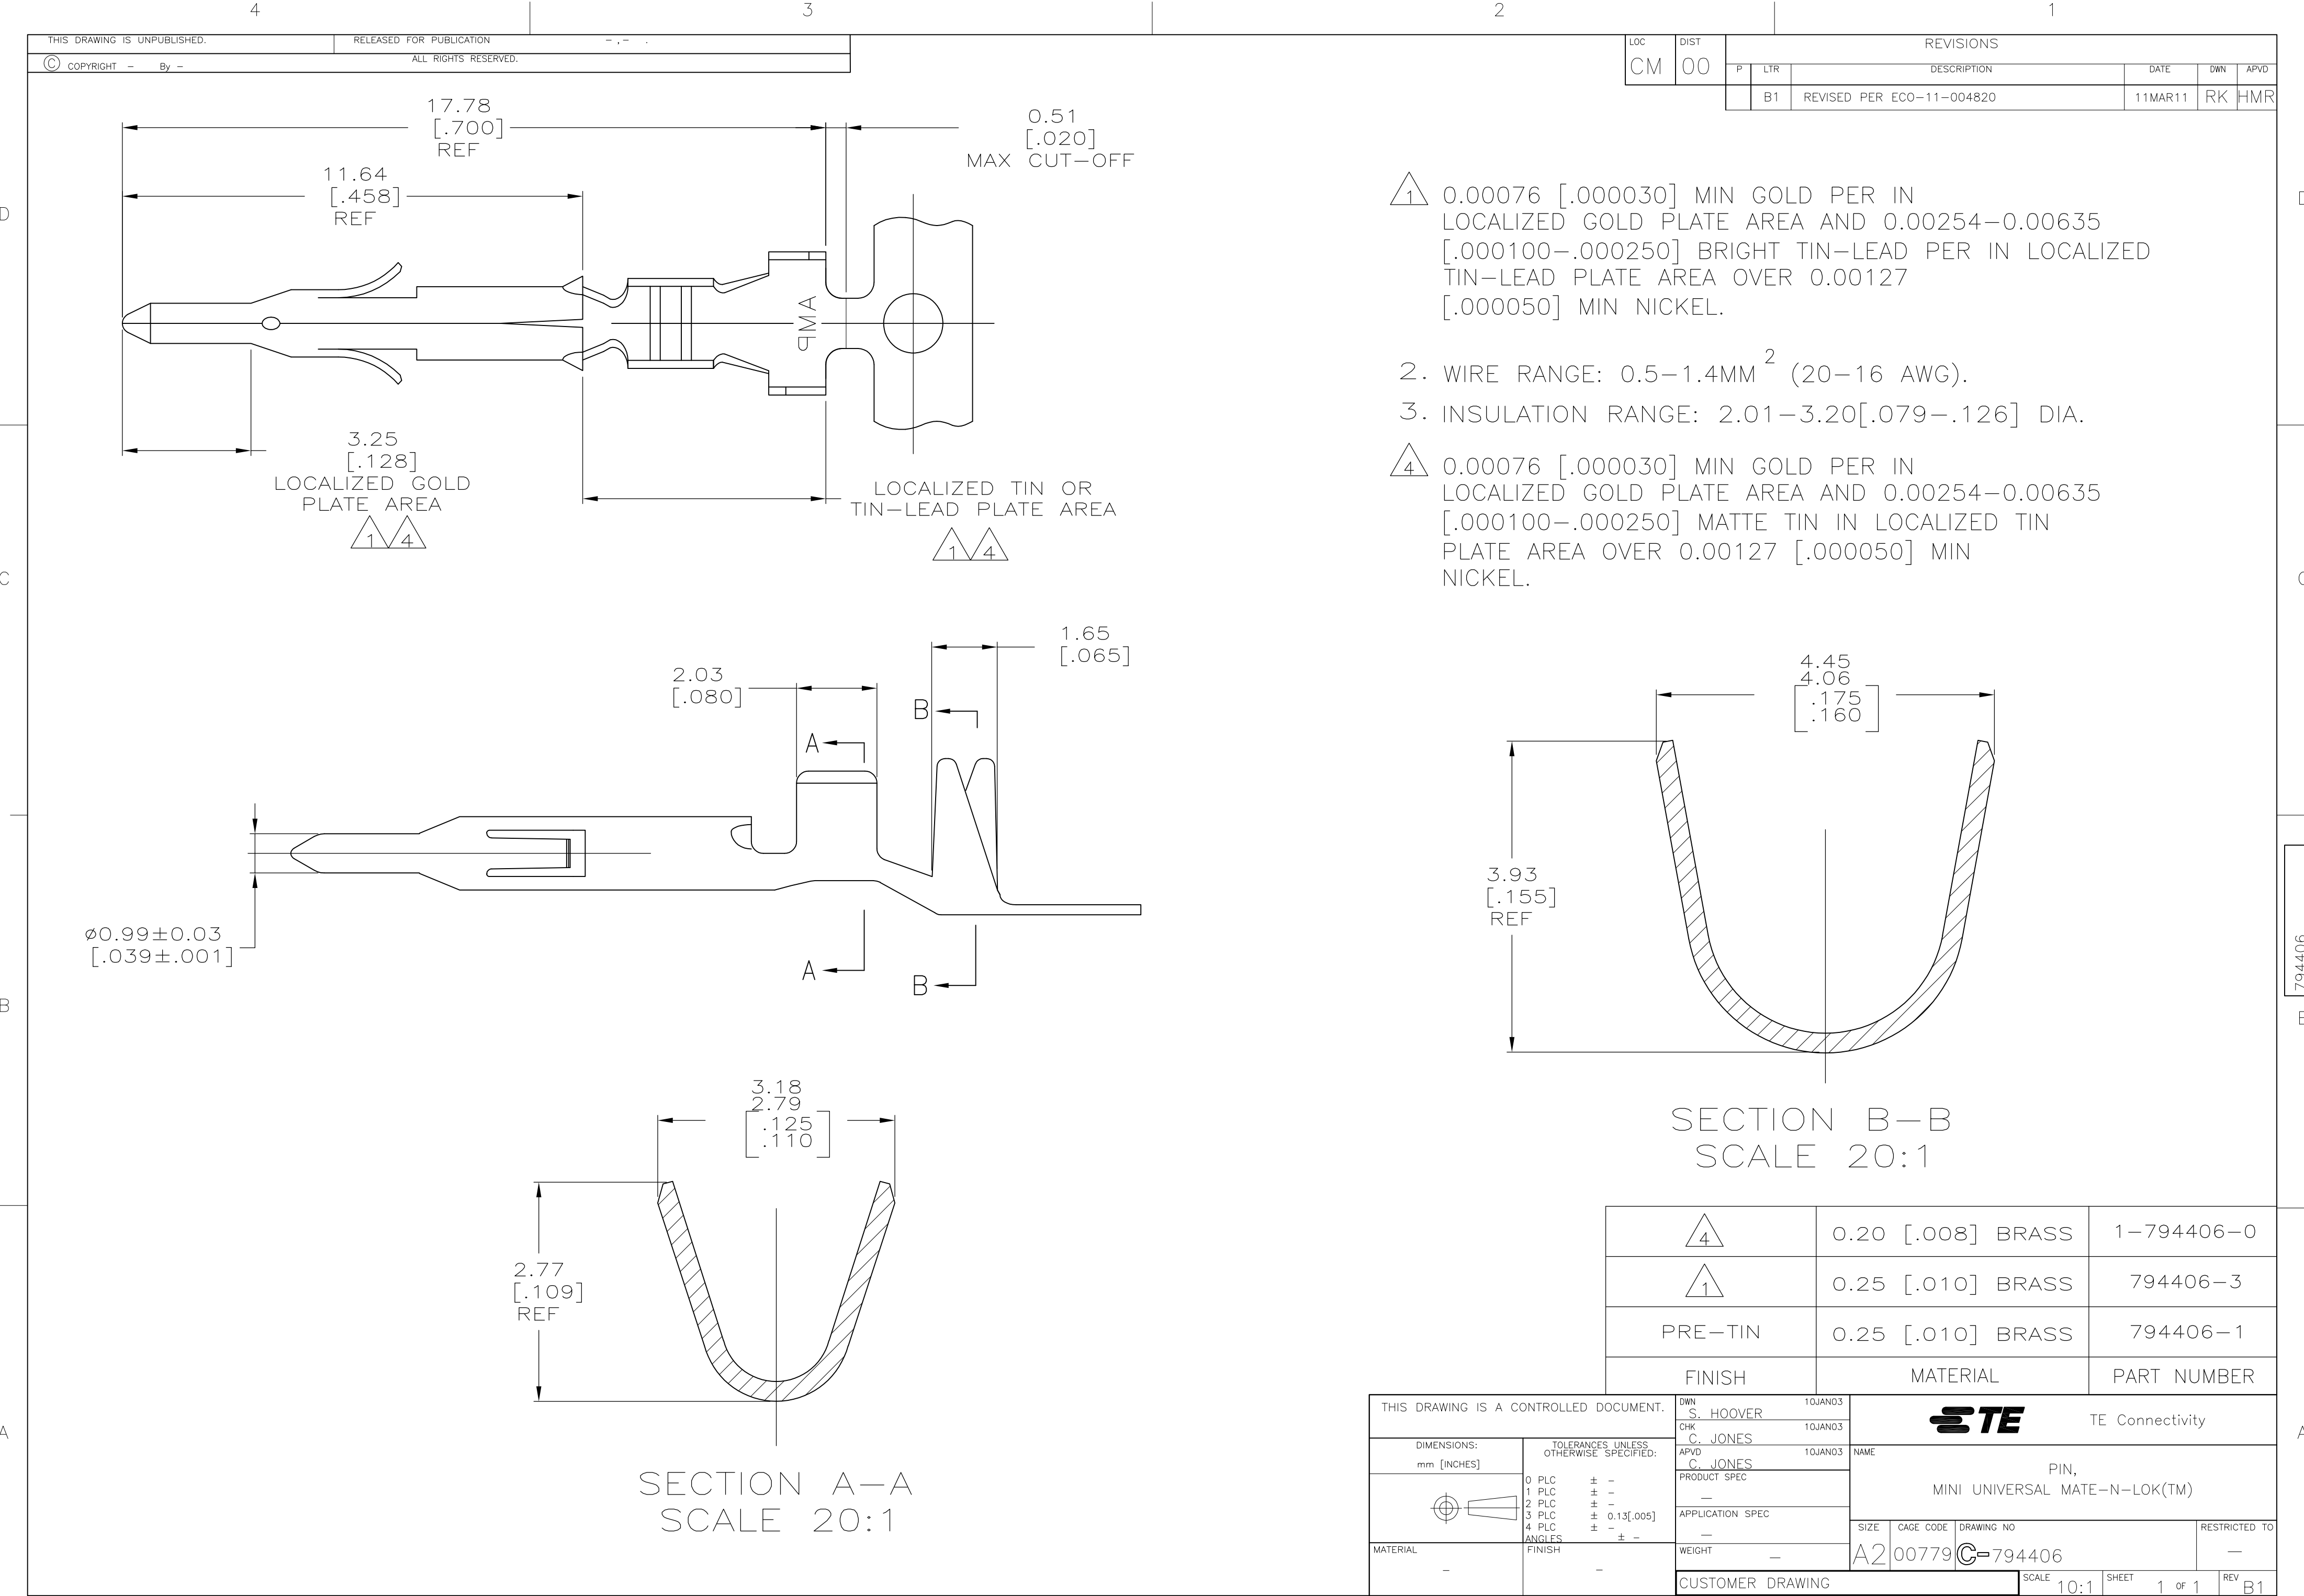

1. 0.00076 [.000030] MIN GOLD PER IN LOCALIZED GOLD PLATE AREA AND 0.00254-0.00635 [.000100-.000250] BRIGHT TIN-LEAD PER IN LOCALIZED TIN-LEAD PLATE AREA OVER 0.00127 [.000050] MIN NICKEL.
2. WIRE RANGE: 0.5-1.4MM² (20-16 AWG).
3. INSULATION RANGE: 2.01-3.20[.079-.126] DIA.
4. 0.00076 [.000030] MIN GOLD PER IN LOCALIZED GOLD PLATE AREA AND 0.00254-0.00635 [.000100-.000250] MATTE TIN IN LOCALIZED TIN PLATE AREA OVER 0.00127 [.000050] MIN NICKEL.

SECTION B-B
SCALE 20:1

SECTION A-A
SCALE 20:1

4	0.20 [.008] BRASS	1-794406-0
1	0.25 [.010] BRASS	794406-3
PRE-TIN	0.25 [.010] BRASS	794406-1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER 10JAN03	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK C. JONES 10JAN03				
		APVD C. JONES 10JAN03	NAME			
		PRODUCT SPEC	PIN, MINI UNIVERSAL MATE-N-LOK(TM)			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
0 PLC ± -		—	A2	00779	C=794406	—
1 PLC ± -		—	SCALE 10:1			
2 PLC ± -		—	SHEET 1 OF 1			
3 PLC ± 0.13[.005]		—	REV B1			
4 PLC ± -		—				
ANGLES ± -		—				
FINISH		—				
MATERIAL		—				
		CUSTOMER DRAWING				