

1N746D THRU 1N759D

SILICON ZENER DIODES
500mW, 3.3 THRU 12 VOLT
1% TOLERANCE




www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 1N746D series silicon Zener diode is a highly reliable voltage regulator designed for use in industrial, commercial, entertainment and computer applications.

MARKING: FULL PART NUMBER

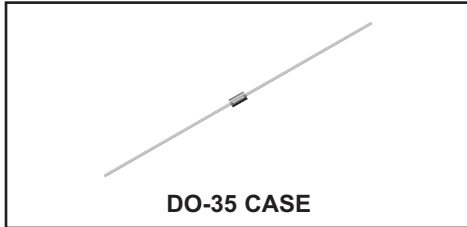

DO-35 CASE

MAXIMUM RATINGS: ($T_L=75^\circ\text{C}$)

Power Dissipation
Operating and Storage Junction Temperature

SYMBOL

P_D
 T_J, T_{stg}

UNITS

500
-65 to +200
mW
 $^\circ\text{C}$


ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$) $V_F=1.5\text{V MAX @ } I_F=200\text{mA}$ (for all types)

Type	Zener Voltage $V_Z @ I_{ZT}$			Test Current I_{ZT}	Maximum Zener Impedance $Z_{ZT} @ I_{ZT}$	Maximum Reverse Leakage Current		Maximum Reverse Leakage Current @ $T_A=150^\circ\text{C}$		Maximum Regulator Current I_{ZM}
	MIN	NOM	MAX			$I_R @ V_R$	$I_R @ V_R$			
	V	V	V					μA	V	
1N746D	3.267	3.3	3.333	20	28	10	1.0	30	1.0	110
1N747D	3.564	3.6	3.636	20	24	10	1.0	30	1.0	100
1N748D	3.861	3.9	3.939	20	23	10	1.0	30	1.0	95
1N749D	4.257	4.3	4.343	20	22	2.0	1.0	30	1.0	85
1N750D	4.653	4.7	4.747	20	19	2.0	1.0	30	1.0	75
1N751D	5.049	5.1	5.151	20	17	1.0	1.0	20	1.0	70
1N752D	5.544	5.6	5.656	20	11	1.0	1.0	20	1.0	65
1N753D	6.138	6.2	6.262	20	7.0	0.1	1.0	20	1.0	60
1N754D	6.732	6.8	6.868	20	5.0	0.1	1.0	20	1.0	55
1N755D	7.425	7.5	7.575	20	6.0	0.1	1.0	20	1.0	50
1N756D	8.118	8.2	8.282	20	8.0	0.1	1.0	20	1.0	45
1N757D	9.009	9.1	9.191	20	10	0.1	1.0	20	1.0	40
1N758D	9.90	10	10.10	20	17	0.1	1.0	20	1.0	35
1N759D	11.88	12	12.12	20	30	0.1	1.0	20	1.0	30

1N746D THRU 1N759D
 SILICON ZENER DIODES
 500mW, 3.3 THRU 12 VOLT
 1% TOLERANCE



DO-35 CASE - MECHANICAL OUTLINE

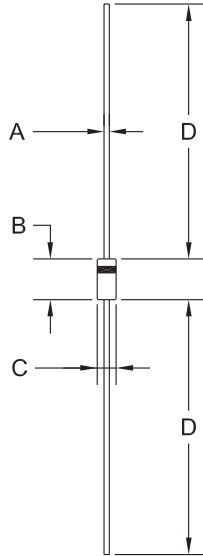

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.018	0.022	0.46	0.56
B	0.120	0.200	3.05	5.08
C	0.060	0.090	1.52	2.29
D	1.000	-	25.40	-

DO-35 (REV: R1)

MARKING: FULL PART NUMBER

R1

R1 (17-December 2013)