
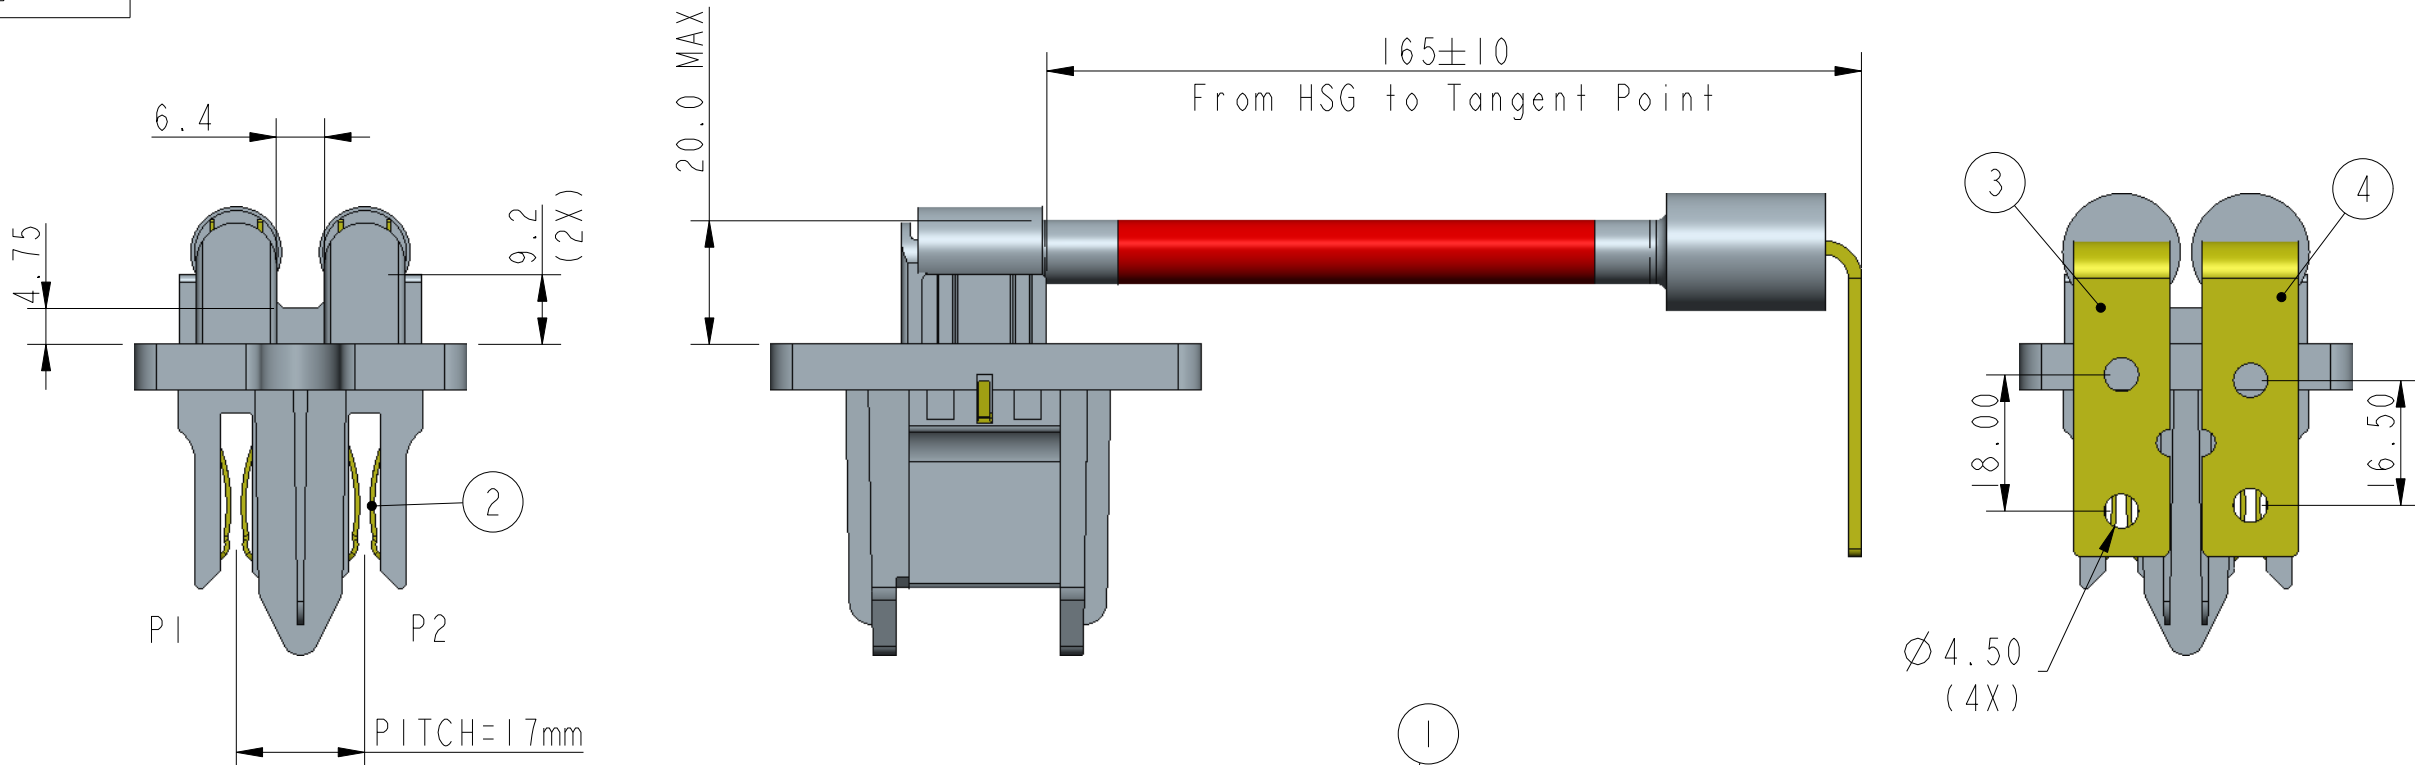


PART NUMBER	CUSTOMER P/N
10124234-060001LF	F03B



ITEM NO.	PART NUMBER	DESCRIPTION	Q'TY
1	10124237-001	HOUSING, THERMOPLASTIC RESIN, UL94V-0	1
2	10124235-06001LF	MATING CONTACT, HIGH CONDUCTIVITY COPPER ALLOY, TIN PLATED.	2
3	10124236-06001LF	FLAT CONTACT, THROUGH HOLE PITCH=18.00mm HIGH CONDUCTIVITY COPPER ALLOY TIN PLATED	1
4	10124236-06002LF	FLAT CONTACT, THROUGH HOLE PITCH=16.50mm HIGH CONDUCTIVITY COPPER ALLOY TIN PLATED	1
5	10124238-06001	FLEXIBLE POWER WIRE, 6 AWG, UL 10070, 105°C, 600V RED INSULATION COLOR,	1
6	10124238-06002	FLEXIBLE POWER WIRE, 6 AWG, UL 10070, 105°C, 600V BLACK INSULATION COLOR,	1
7	10124239-06000	THERMAL SHRINKAGE TUBING, COLOR BLACK, 0.5mm THICKNESS. LENGTH 25mm MIN.	4

NOTES:
(1) ELECTRICAL RATING: 600V, 60A
(2) WORKING TEMPERATURE: -20~75°C
(3) REFERENCE DOCUMENTS:
PRODUCT SPECIFICATION: FCI-GS-12-1127
PACKAGEING SPECIFICATION: FCI-GS-14-2295
(4) RoHS COMPLIANT.

spec ref				dr Beer Fu		2013-02-01		projection		MM		size A3		scale 1:1					
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng Beer Fu		2013-02-01						ecn no ELX-T-19523					
chr Beer Fu						2013-02-01		rel level RELEASED											
appr Beer Fu						2013-02-01		product family -											
surface 		linear		0.X		±0.30				title POWER CABLE FINAL ASSEMBLY						dwg no 10124234-060001LF		rev C	
				0.XX		±0.15													
				0.XXX		±0.05													
		angular		0°		±5°		www.fci.com		cat. no. -		CUSTOMER						sheet 1 of 1	