


REV.	DATE	DESCRIPTION
A	05/01/04	UPDATE DRAWING FORMAT

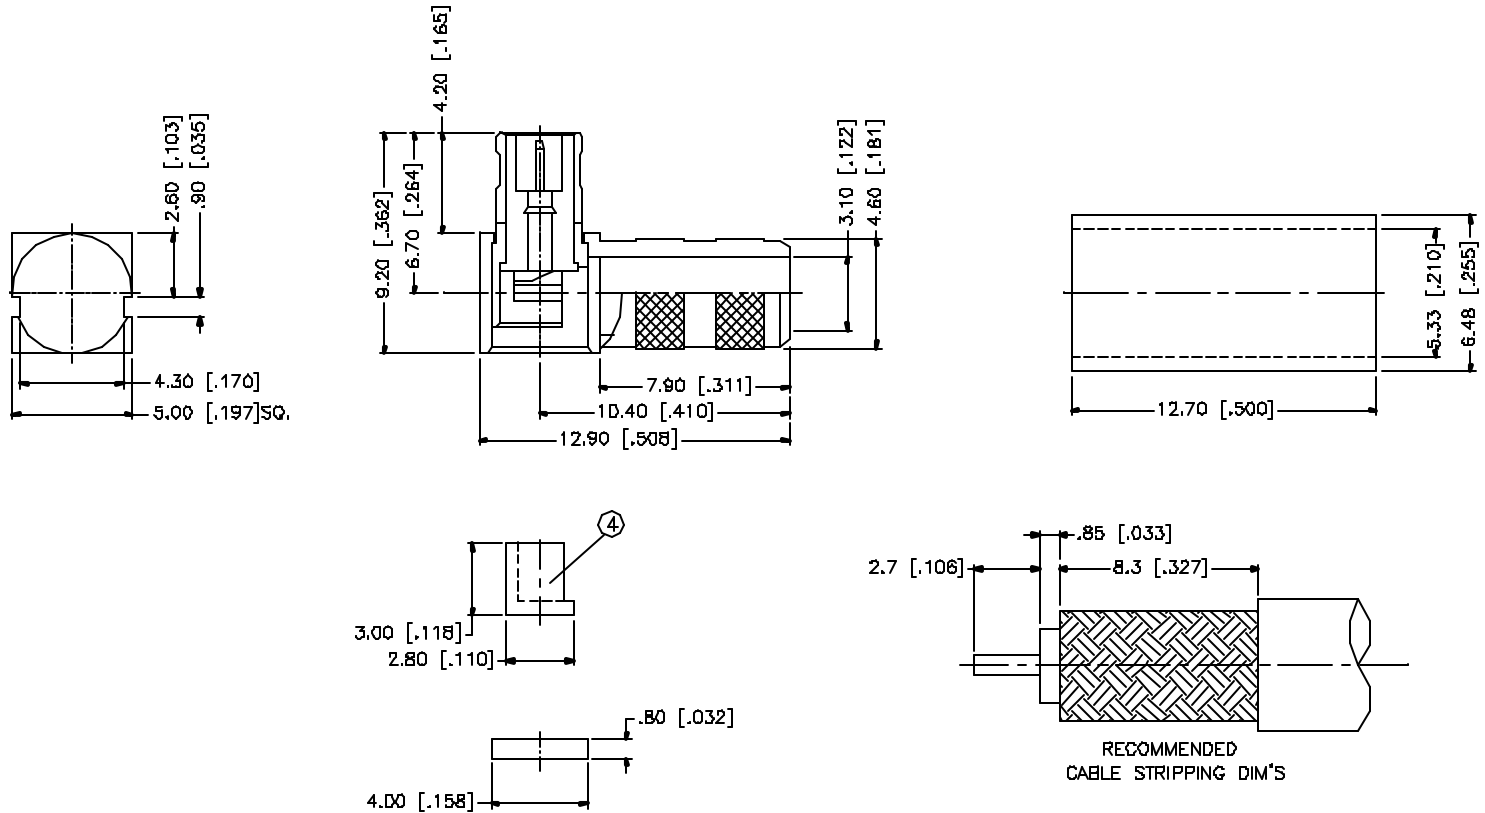

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex						
8						DRAWN	G.R.S.	05/01/04	PART DESCRIPTION MCX R/A CRIMP PLUG					
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	CHECKED								
6	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	ISSUED								
5	COVER	BRASS	NICKEL	1		SHEET	1 OF 1		PART NO. 252114					
4	INSULATOR	DELFIN	NATURAL	1										
3	CONTACT PIN	BRASS	GOLD	1					DWG. NO. 252114.DWG					
2	INSULATOR	TEFLON	NATURAL	1										
1	BODY	COPPER	NICKEL	1					REV.	A	SIZE	A	SCALE	NA
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	DWG FILE C:/252/252114.DWG								