

1234567





| SIGN                                           | DATE       | DESCRIPTION                                           | APPROVER |
|------------------------------------------------|------------|-------------------------------------------------------|----------|
| △                                              | 2011.08.24 | The dimension is changed from 15.24mm to 15.00±0.20mm | Aaron    |
| △                                              | 2011.08.24 | The dimension are added                               | Aaron    |
| △                                              | 2011.08.24 | The dimension is changed from 15.24mm to 15.00mm      | Aaron    |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! |            |                                                       |          |

Material

- Item ① Short male Contact pin: Copper ,Tin plated
- Item ② Long male Contact pin: Copper ,Tin plated
- Item ③ Terminal (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 
- Critical dimension: ▽

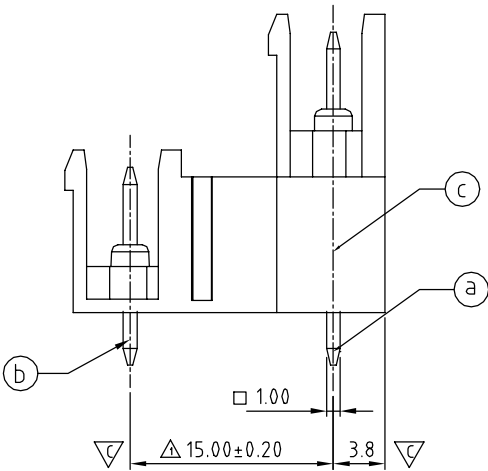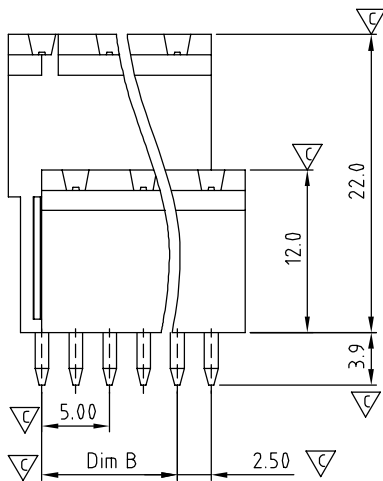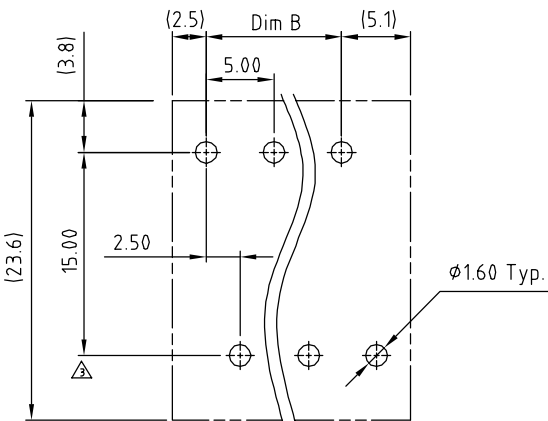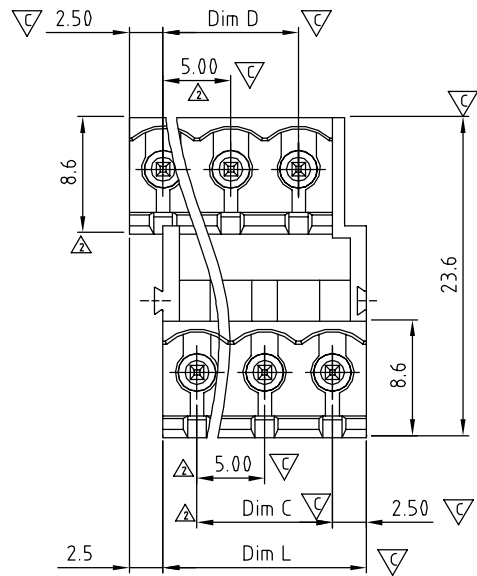

VF xx 70 x 0 xxxx G

| Poles        | Color               | RoHS                                                                   |
|--------------|---------------------|------------------------------------------------------------------------|
| 04 2×2Poles  | 0 Black (RAL9005)   | Pb<40,000ppm                                                           |
| 06 2×3Poles  | 2 Red (RAL3001/D)   | 0000 Standard @ Logo                                                   |
| ...          | 3 Orange(RAL2011/P) | 000A Standard ANY Logo                                                 |
| 48 2×24Poles | 4 Yellow(RAL1018/A) | Any special item by customer request, please contact sales department. |
|              | 5 Green(RAL6018/T)  |                                                                        |
|              | 6 Blue (RAL5015/A)  |                                                                        |
|              | 8 Grey(RAL7035/D)   |                                                                        |
|              | 9 White(RAL1102)    |                                                                        |
|              | C Green(RAL6018/U)  |                                                                        |

N=NUMBER OF CONTACTS

| Dimension |             | TOL       |            |             |             |             |
|-----------|-------------|-----------|------------|-------------|-------------|-------------|
|           |             | 2×2P-2×5P | 2×6P-2×10P | 2×11P-2×15P | 2×16P-2×20P | 2×21P-2×24P |
| Dim L     | N/2×5.0     | ±0.15     | ±0.20      | ±0.25       | ±0.30       | ±0.35       |
| Dim B     | (N/2-1)×5.0 | ±0.15     | ±0.20      | ±0.25       | ±0.30       | ±0.35       |
| Dim C     | (N/2-1)×5.0 | ±0.15     | ±0.20      | ±0.25       | ±0.30       | ±0.35       |
| Dim D     | (N/2-1)×5.0 | ±0.15     | ±0.20      | ±0.25       | ±0.30       | ±0.35       |

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|              |               |                                             |                       |                                                                                       |             |            |
|--------------|---------------|---------------------------------------------|-----------------------|---------------------------------------------------------------------------------------|-------------|------------|
| TITLE        |               | VF-5.00 Series 2×2P-2×24P ( Open ) Vertical |                       |                                                                                       |             |            |
| PART NO.     | VFxx70x0xxxxG |                                             |                       | DWG NO.                                                                               | 8VF0004     |            |
| APPROVED     | CHECKED       | DESIGNED                                    | DRAWN                 | CUST NO.                                                                              | Tolerance   |            |
|              |               | Aaron<br>2011.08.24                         | Chen Bo<br>2011.02.21 |  | UNIT: mm    | X. ±0.50   |
|              |               |                                             |                       |                                                                                       | SCALE: NONE | X.X ±0.30  |
|              |               |                                             |                       |                                                                                       |             | X.XX ±0.10 |
|              |               |                                             |                       |                                                                                       |             | X° ±1°     |
| SHEET: 01/01 |               | REV.: C                                     |                       |                                                                                       |             |            |

1234567