
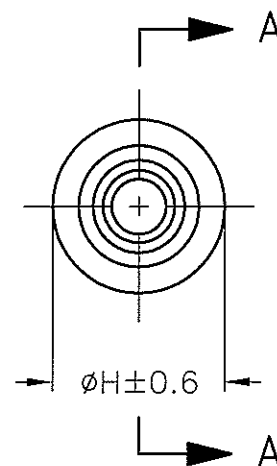


LOC	DIST	REVISIONS				DATE	DWN	APVD
J	—	P	LTR	DESCRIPTION				
			D2	REVISED PER ECO-11-005030		22MAR11	RK	HMR

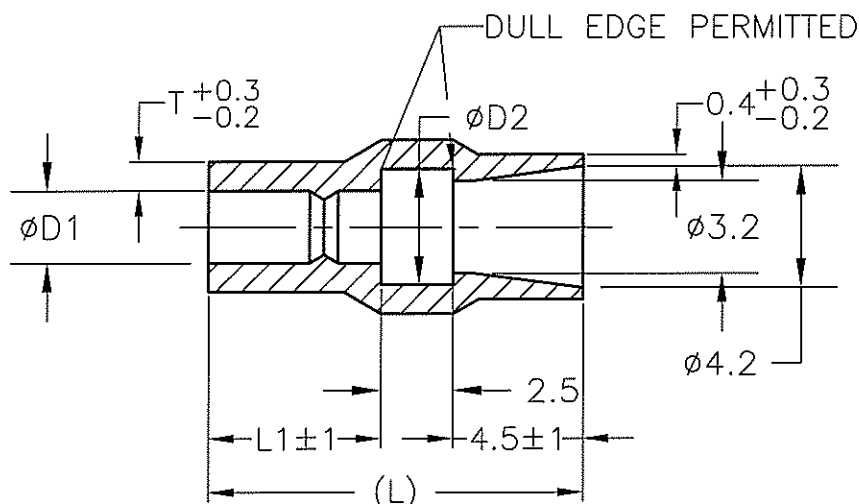

1. 材質: SS-108 (一般)
2. 一般公差: ± 0.5
3. 適用製品規格は無し

A-A

△ 品川商工発行のカタログと本図で寸法を優先する。

法が異なる場合は

1. MATERIAL: SS-108 (GENERAL)
 2. GENERAL TOLERANCE: ± 0.5
 3. APPLICABLE PRODUCT SPEC NOT AVAILABLE
- △ IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE

CLEAR	14	7	4.5	1.5	0.6	5.9	224215	170887-5
	13	6		3.5	0.7		224235	170887-4
	14	7		3.2			224232	170887-3
BLACK	13	6	4	2.5	5.4	224225B	170887-2	
CLEAR						224225	170887-1	
COLOR	L	L1	φ D2	φ D1	T	H	SHINAGAWA SHOKO PN	PN


X-170892-X	SEE 170892
X-170893-X	SEE 170893
X-170889-X	SEE 170889
X-170888-X	SEE 170888
X-170890-X	SEE 170890
X-170891-X	SEE 170891
X-170823-X	SEE 170823
PN	REMARK

WIRE RANGE
抱合電線断面積INSULATION DIA
被覆外径DIMENSIONS:
単位: 耗
MM

DWN 31 AUG 00
A.YAMAGUCHI
CHK 31 AUG 00
D.MATSUURA
APVD 31 AUG 00
K.BETSUI

MATERIAL
材料FINISH
仕上TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC $\pm$ —
1 PLC $\pm$ —
2 PLC $\pm$ —
3 PLC $\pm$ —
4 PLC $\pm$ —
ANGLES $\pm$ —

PRODUCT SPEC
製品規格APPLICATION SPEC
取付適用規格

WEIGHT

CUSTOMER DRAWING

TE

TE Connectivity

NAME
名称

CONNECT SLEEVE FOR
5DIA SERIES SHUR PLUG RECEPTACLE

SIZE

CAGE CODE

DRAWING NO
番号

RESTRICTED TO

A4

00779

C-170887

—

SCALE
尺度

4:1

SHEET

1

OF 1

REV

D2