



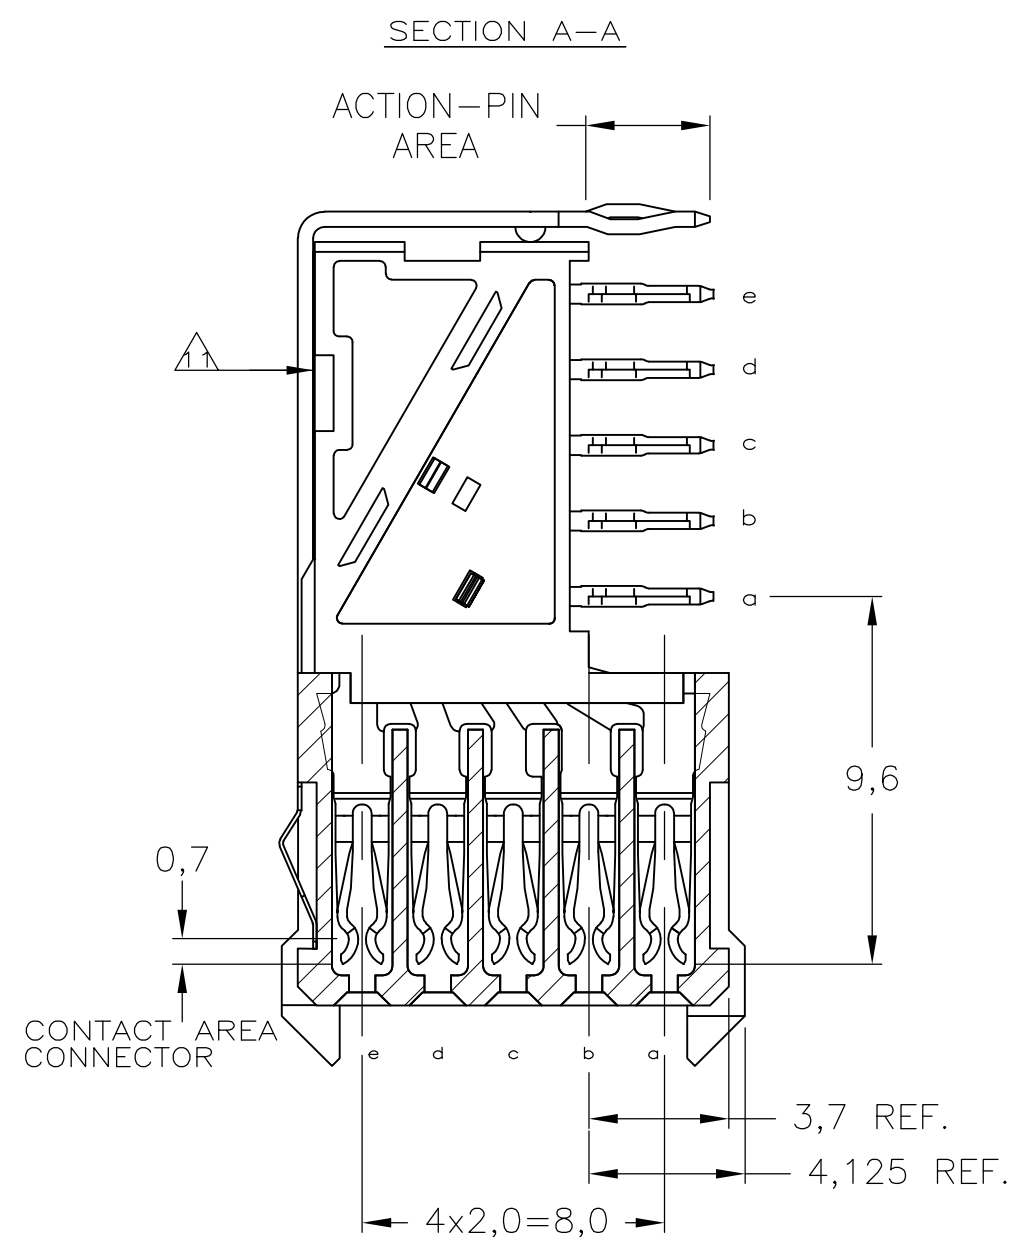

△1	MATERIAL CONTACTS; PHOSPHORBRONZE MATERIAL SHIELD ; PHOSPHORBRONZE MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
△2	GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
△3	CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
△4	CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
△5	CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
△6	CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
△8	ASSEMBLY PRINTED WITH P/N AND DATECODE THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
△9	HOLE PATTERN FOR FEMALE CONNECTOR TYPE C 55 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
△10	ROW "f" 6 PLATED THROUGH HOLES FOR UPPERSHIELD
△11	SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED ADHESIVE TAPE OR ADHESIVE
12	FITS WITH LOWERSHIELD, BASIC PARTNUMBER : 5352112.
△13	0.76μm MIN Au PLATING AT MATING SURFACES.

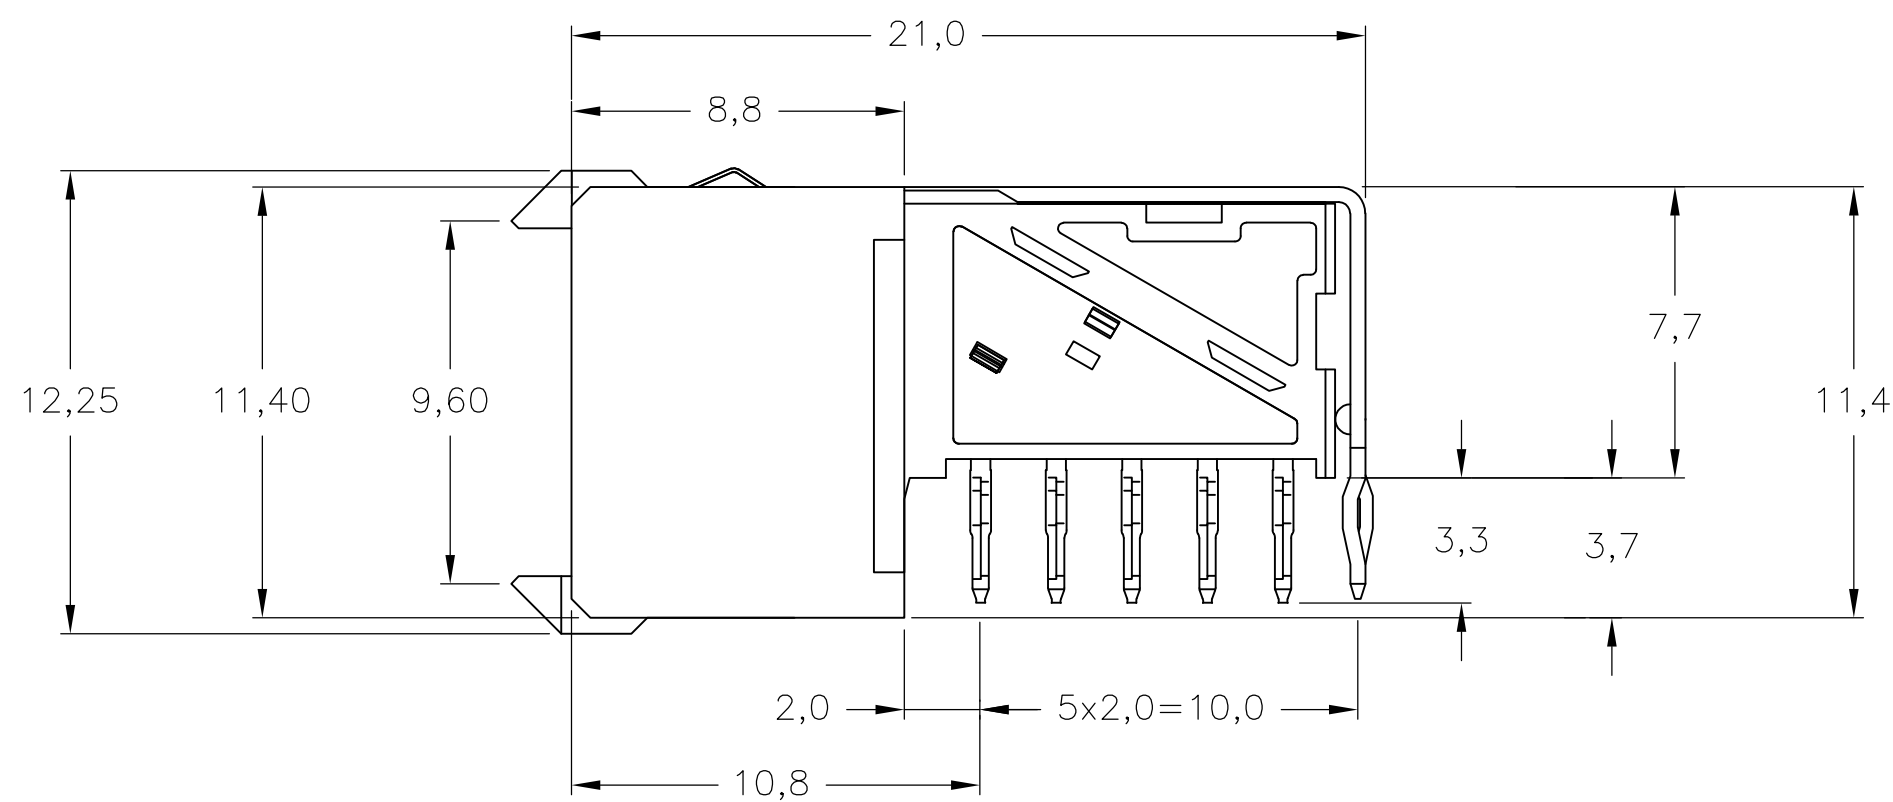

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN 19AUG2004 CHK B.MOOLJ 24SEP2004 APVD B.MOOLJ 24SEP2004		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0-PLC ±.1 1-PLC ±.1 2-PLC ±.1 3-PLC ±.1 4-PLC ±.1 ANGLES ±.1			
MATERIAL -		FINISH -		NAME Z-PACK 2mm HM TYPE C - 11 COLUMNS PRE-SHIELDED RECEPTACLE	
WEIGHT 0.000000		SIZE A2		CAGE CODE 00779	
CUSTOMER DRAWING		DRAWING NO C-5352115		RESTRICTED TO -	
SCALE 5:1		SHEET 1 of 1		REV H	