

## PCB terminal block - MK3DSH 3/ 9-5,08-EX GY7035 BD1 - 1710023

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, nominal current: 24 A, nom. voltage: 320 V, pitch: 5.08 mm, number of positions: 9, connection method: Screw connection with tension sleeve, mounting: Wave soldering, conductor/PCB connection direction: 0 °, color: light gray

The figure shows a 2-pos. version of the product

### Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Satisfies the more stringent safety requirements of "Ex e" protection according to IEC 60079-7 for potentially explosive areas
- ✓ Tall type enables conductor connection for sealed PCBs
- ✓ Conductor connection on several levels enables higher contact density
- ✓ Integrated protective guide prevents incorrect insertion of the conductor underneath the tension sleeve
- ✓ The latching on the side enables various numbers of positions to be combined

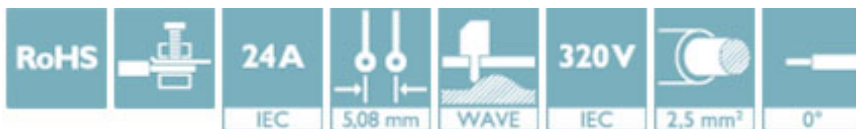

### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 50 pc                                                                                                   |
| GTIN         | <br>4 046356 074643 |
| GTIN         | 4046356074643                                                                                           |

### Technical data

#### Item properties

|                           |                                      |
|---------------------------|--------------------------------------|
| Brief article description | PCB terminal block                   |
| Range of articles         | MK3DSH 3-EX                          |
| Pitch                     | 5.08 mm                              |
| Number of positions       | 9                                    |
| Connection method         | Screw connection with tension sleeve |
| Screw thread              | M3                                   |
| Mounting type             | Wave soldering                       |
| Pin layout                | Linear pinning                       |

# PCB terminal block - MK3DSH 3/ 9-5,08-EX GY7035 BD1 - 1710023

## Technical data

### Item properties

|                  |   |
|------------------|---|
| Number of levels | 1 |
|------------------|---|

### Electrical parameters

|                                  |       |
|----------------------------------|-------|
| Rated current                    | 24 A  |
| Rated insulation voltage (III/2) | 320 V |
| Rated surge voltage (III/2)      | 4 kV  |

### Connection capacity

|                                                                                        |                                               |
|----------------------------------------------------------------------------------------|-----------------------------------------------|
| Conductor cross section solid                                                          | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>     |
| Conductor cross section flexible                                                       | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>   |
| Conductor cross section AWG / kcmil                                                    | 24 ... 12                                     |
| Conductor cross section flexible, with ferrule without plastic sleeve                  | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Conductor cross section, flexible, with ferrule, with plastic sleeve                   | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, solid                                            | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>   |
| 2 conductors with same cross section, flexible                                         | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>   |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve        | 0.25 mm <sup>2</sup> ... 0.75 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, with TWIN ferrules with plastic sleeve | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>   |
| Stripping length                                                                       | 7 mm                                          |
| Torque                                                                                 | 0.5 Nm ... 0.6 Nm                             |

### Material data - contact

|                                          |                                                                                   |
|------------------------------------------|-----------------------------------------------------------------------------------|
| Note                                     | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/ JEDEC JESD 201 |
| Contact material                         | Cu alloy                                                                          |
| Metal surface terminal point (top layer) | Tin (5 - 7 µm Sn)                                                                 |
| Metal surface soldering area (top layer) | Tin (5 - 7 µm Sn)                                                                 |

### Material data - housing

|                                                                   |        |
|-------------------------------------------------------------------|--------|
| Insulating material                                               | PA     |
| Insulating material group                                         | I      |
| CTI according to IEC 60112                                        | 600    |
| Flammability rating according to UL 94                            | V0     |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850    |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775    |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C |

### Dimensions for the product

|              |                                                                               |
|--------------|-------------------------------------------------------------------------------|
| Caption      | The figure shows the dimensional drawing of the 3-pos. version of the product |
| Length [ l ] | 12.1 mm                                                                       |
| Width [ w ]  | 45.72 mm                                                                      |
| Height [ h ] | 49.8 mm                                                                       |
| Pitch        | 5.08 mm                                                                       |

# PCB terminal block - MK3DSH 3/ 9-5,08-EX GY7035 BD1 - 1710023

## Technical data

### Dimensions for the product

|                             |              |
|-----------------------------|--------------|
| Height (without solder pin) | 44.8 mm      |
| Solder pin [P]              | 5 mm         |
| Pin dimensions              | 0.9 x 0.9 mm |
| Dimension a                 | 40.64 mm     |

### Dimensions for PCB design

|               |        |
|---------------|--------|
| Hole diameter | 1.3 mm |
|---------------|--------|

### Packaging information

|                            |                     |
|----------------------------|---------------------|
| Type of packaging          | packed in cardboard |
| Pieces per package         | 50                  |
| Denomination packing units | Pcs.                |

### General product information

|              |                                                                                                                                                                                                                                                                                                                                                                    |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type of note | Note on application                                                                                                                                                                                                                                                                                                                                                |
| Note         | For safe conductor connection, always adhere to a defined tightening torque. Particularly in the case of PCB terminal blocks with two or three positions, the individual solder pin for each contact point cannot compensate for this. That is why the terminal blocks must be supported during conductor connection (held with one hand, support on the housing). |

### Electrical tests

|                                  |       |
|----------------------------------|-------|
| Rated current                    | 24 A  |
| Rated insulation voltage (III/2) | 320 V |
| Rated surge voltage (III/2)      | 4 kV  |

### Air clearances and creepage distances

|                                  |       |
|----------------------------------|-------|
| Insulating material group        | I     |
| Voltage                          | 250 V |
| Rated insulation voltage (III/3) | 250 V |
| Rated insulation voltage (III/2) | 320 V |
| Rated insulation voltage (II/2)  | 630 V |
| Rated surge voltage (III/3)      | 4 kV  |
| Rated surge voltage (III/2)      | 4 kV  |
| Rated surge voltage (II/2)       | 4 kV  |

### Standards and Regulations

|                                  |        |
|----------------------------------|--------|
| Connection in acc. with standard | EN-VDE |
|----------------------------------|--------|

### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| REACH SVHC | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50                                                            |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## PCB terminal block - MK3DSH 3/ 9-5,08-EX GY7035 BD1 - 1710023

### Approvals

#### Approvals

---

#### Approvals

EAC

---

#### Ex Approvals

IECEX / ATEX / EAC Ex

---

#### Approval details

|     |                                                                                   |         |
|-----|-----------------------------------------------------------------------------------|---------|
| EAC |  | B.01742 |
|-----|-----------------------------------------------------------------------------------|---------|

---

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>