

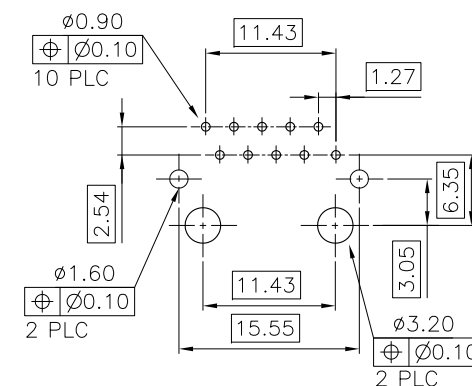


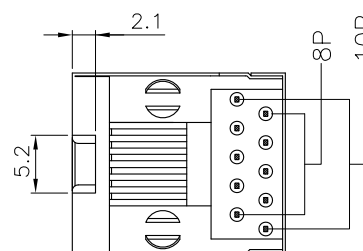

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)
DIMENSION TOLERANCE: 1 PLC: ± 0.1 2PLC: ± 0.05)

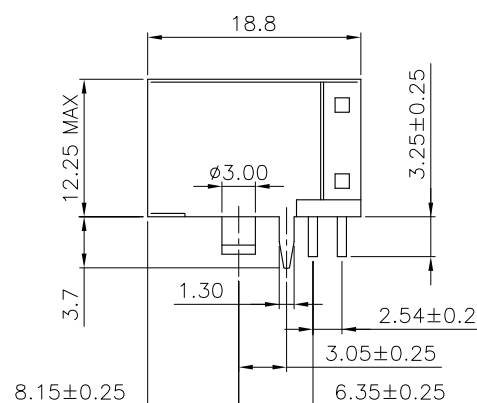



5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	10P8C	RED	50μ"	3-1734580-4
OBSOLETE			30μ"	3-1734580-3
OBSOLETE			15μ"	3-1734580-2
OBSOLETE			6μ"	3-1734580-1
OBSOLETE	10P10C	BLACK	50μ"	1-1734580-4
			30μ"	1-1734580-3
			15μ"	1-1734580-2
			6μ"	1-1734580-1
OBSOLETE	10P8C △	BLACK	50μ"	1734580-8
			30μ"	1734580-7
			15μ"	1734580-6
			6μ"	1734580-5
OBSOLETE	10P8C	BLACK	50μ"	1734580-4
			30μ"	1734580-3
			15μ"	1734580-2
			6μ"	1734580-1
	RJ 45	HSG. COLOR	MIN. GOLD THICKNESS	PART NUMBER


SCALE	—	SHEET	1 OF 2	REV	B3
-------	---	-------	--------	-----	----

ANGLES	± 5
FINISH	

LOC	DIST	REVISIONS					
DW	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

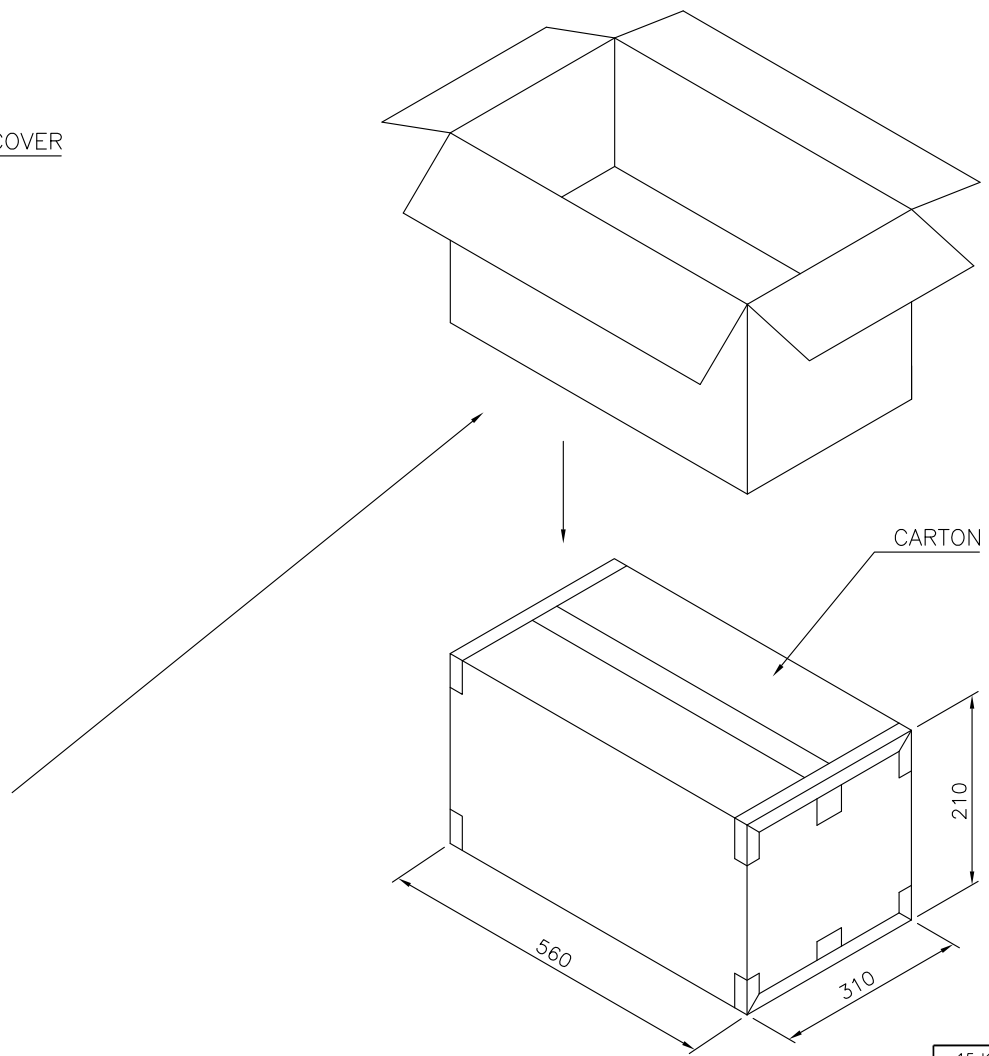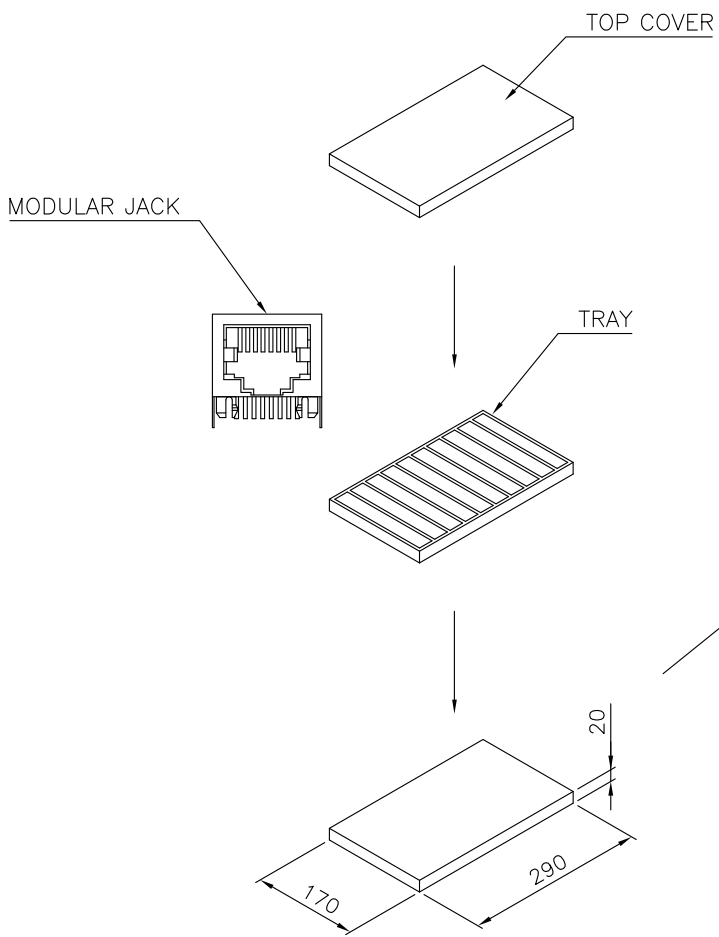

15 Kg	13.5 Kg	100	25	2500 PCS
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAYS /CARTON	QUANTITY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O. HU	01JUN2007	 TE Connectivity	
DIMENSIONS: MM		CHK S. HOU	01JUN2007		
		APVD W.J. KE	01JUN2007		
		PRODUCT SPEC	—		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	—	MODULAR JACK, RJ45, 8P8C, SHIELDED, SIDE ENTRY, LOW PROFILE	
0 PLC ± -		WEIGHT	—		
1 PLC ± -		CUSTOMER DRAWING		SIZE A3	CAGE CODE 00779
2 PLC ± -		SCALE		DRAWING NO C=1734580	RESTRICTED TO
3 PLC ± -		SHEET		2 of 2	REV B3
4 PLC ± -		FINISH			
MATERIAL					