
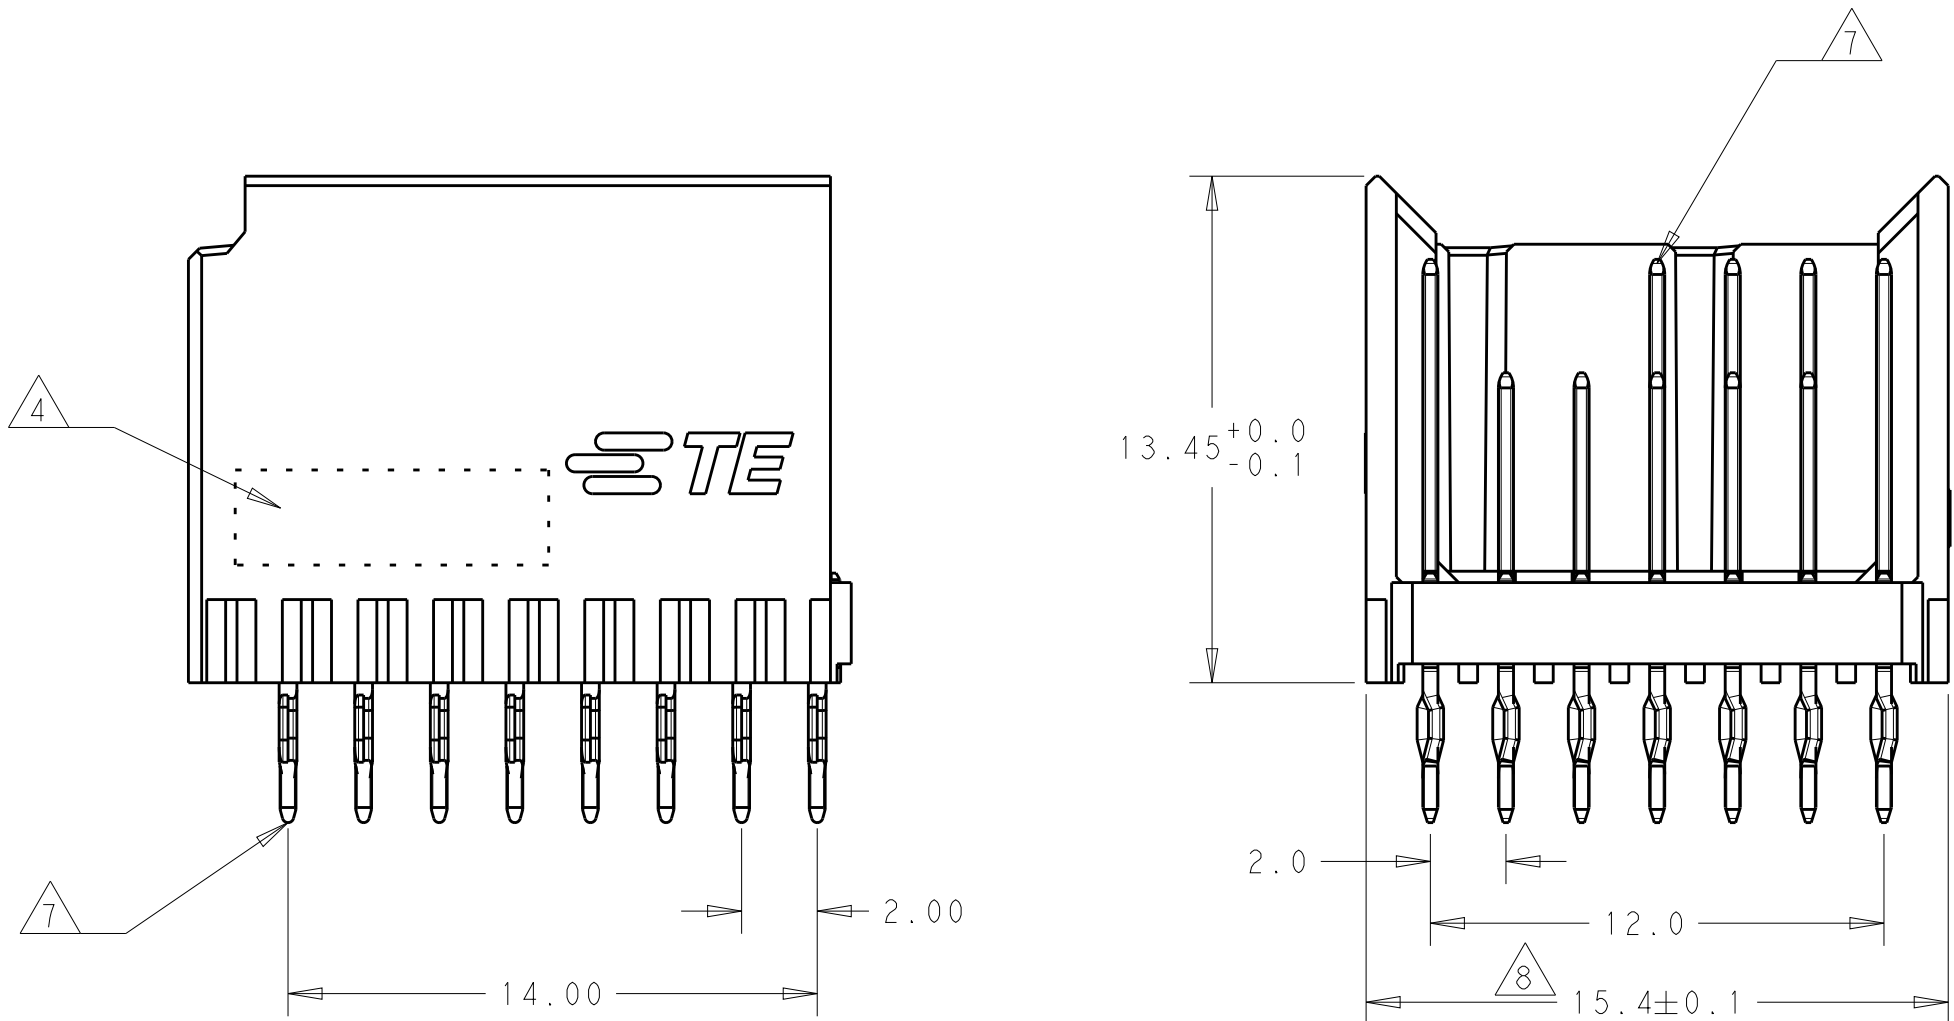



CONNECTOR ASSEMBLY
EXEMPLARY LOADED

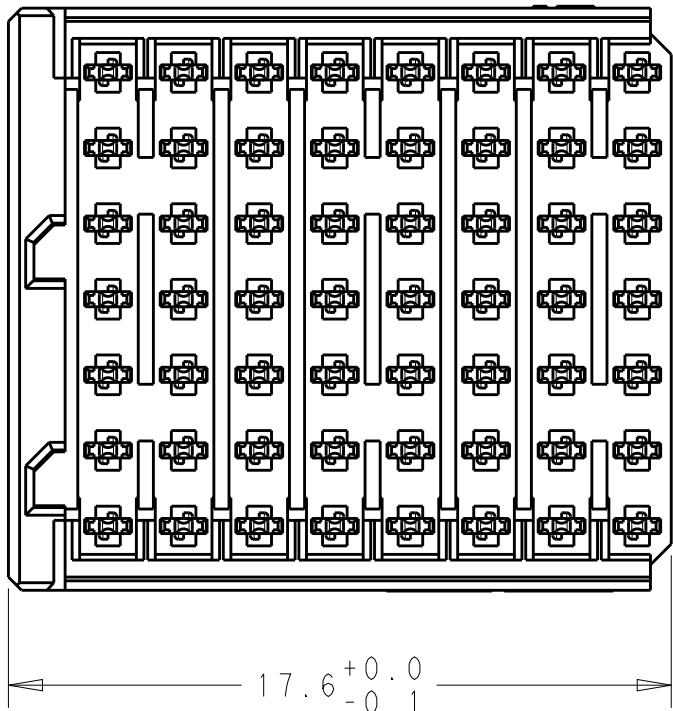


CONTACT LAYOUT

8	7	6	5	4	3	2	1	
C	C	C	C	C	C	C	C	z
A	A	A	A	A	A	C	A	a
A	A	A	A	A	C	A	A	b
A	A	A	A	C	C	A	A	c
A	A	A	A	A	A	A	A	d
A	A	A	A	A	A	A	A	e
C	C	C	C	C	C	C	C	f

CONTACT DIMENSIONS

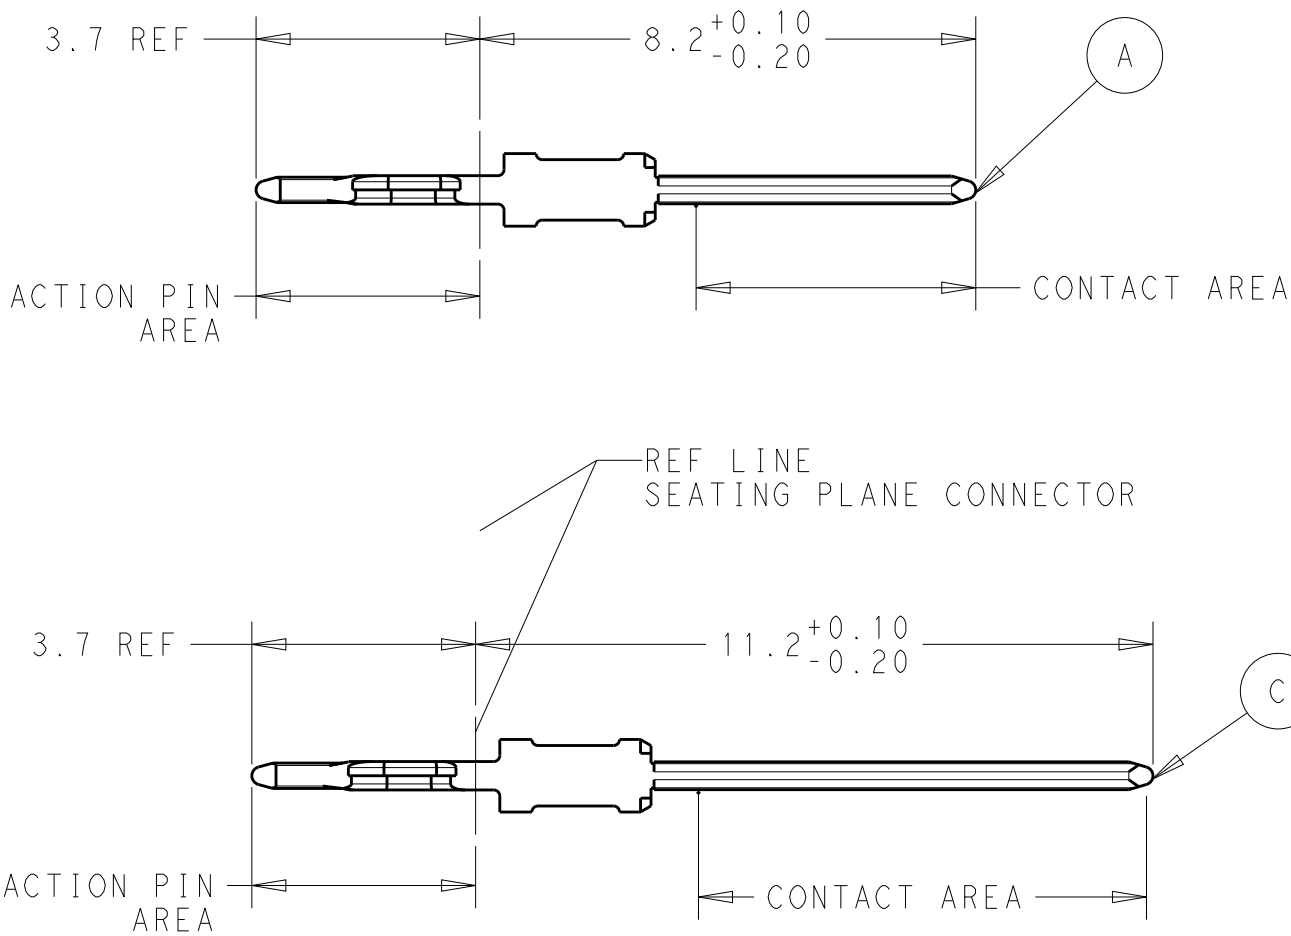

RECOMMENDED PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN

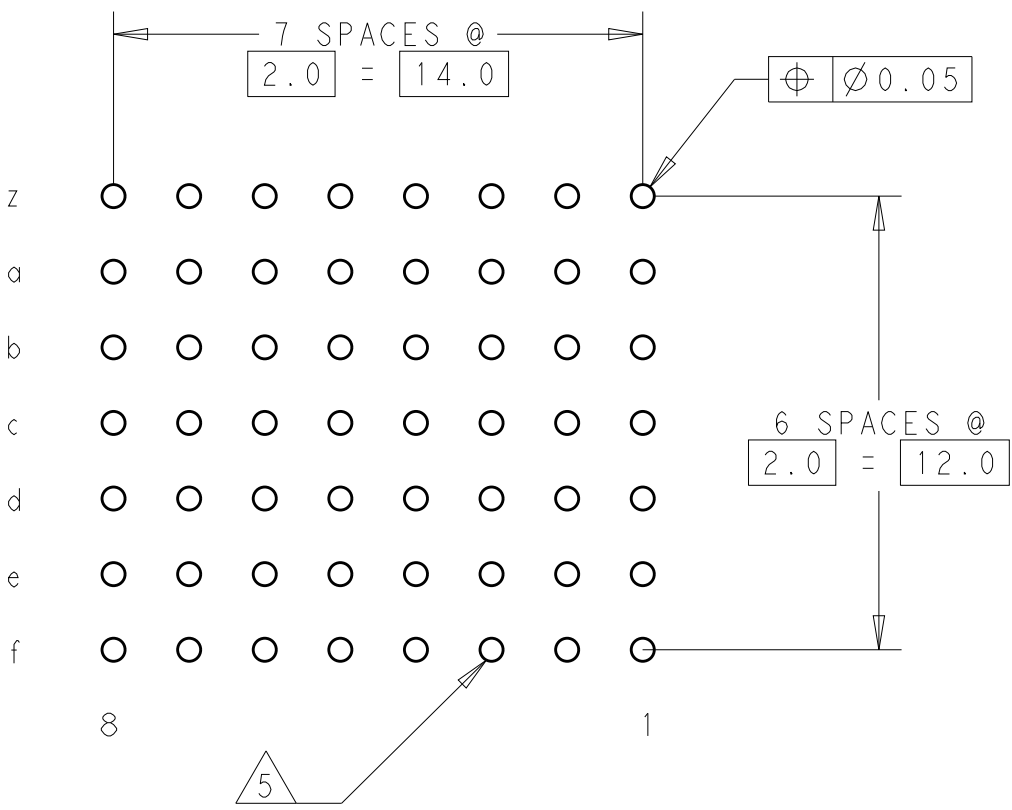

PLATED THRU HOLES PARAMETERS
REFERENCE APPLICATION SPECIFICATION

REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
	A	INITIAL RELEASE	14DEC2018	FL

1. MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.
2. GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
3. CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.
4. CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
5. PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.
6. FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".
7. FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".
8. TO BE MEASURED AT BOTTOM OF SHROUD.

2/3	2336514-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN FRED LIU 15MAY2018	TE Connectivity	
DIMENSIONS:		CHK ALEX SHOAL 15MAY2018		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD HOPE LIU 15MAY2018	NAME MALE ASSEMBLY, Z-PACK 2mm HM, 8 COLUMN	
	0 PLC ±	PRODUCT SPEC	SIZE A100779	
	1 PLC ±0.2	108-60123		
	2 PLC ±0.2	APPLICATION SPEC	CAGE CODE 114-19029	
	3 PLC ±0.2	114-19029		
MATERIAL	4 PLC ±	WEIGHT	RESTRICTED TO	
	ANGLES	114-19029		
-	FINISH	CUSTOMER DRAWING	SCALE 4:1	
-	SEE TABLE		SHEET 1 OF 1	
-	-		REV A	