


PSW SERIES PLUNGER SWITCH

PSW-1


The PSW-1 is a SPST N.O. Plunger Switch for closed circuit loop. The plungers 7mm overall stroke allows for only 3mm operating stroke. This device can be utilized as a tamper switch. It comes with #22 lead wires that are 25" long.

PSW-1H -adapter housing for PSW-1

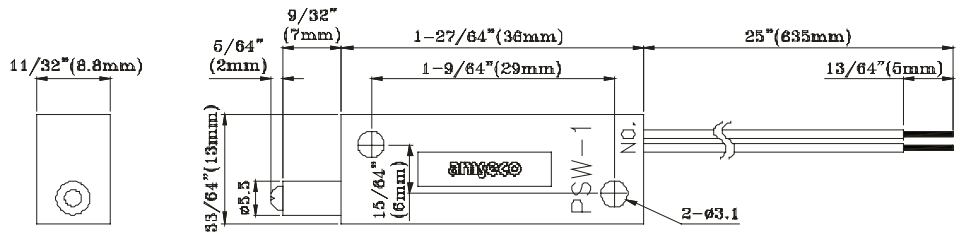


PSW-2

The PSW-2 normally closed and normally open SPST dual switches allow the PSW-2 to be used as SPDT transfer circuit. The plunger has a 7mm overall stroke and the lead wires are #22 and 25" long.

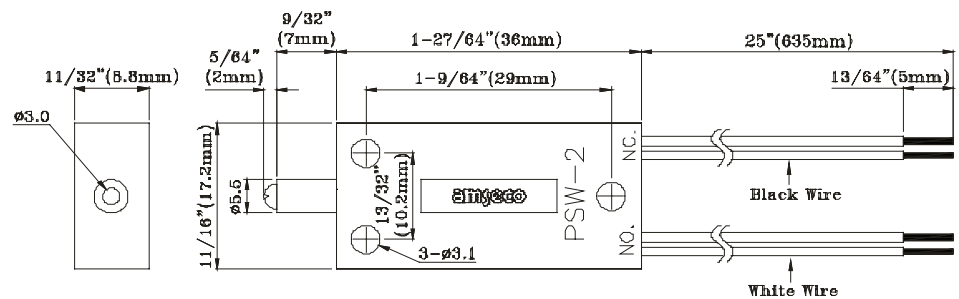


PSW-21

The PSW-21 is a SPST plunger switch for a closed circuit loop. It will fit into a 3/8" drilled hole for recessed mounting. The lead wires are #22 and 25" long.

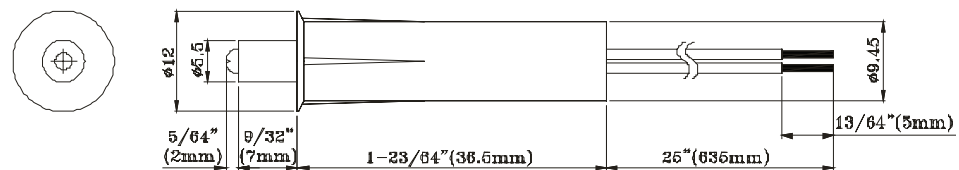

PSW-22

The PSW-22 is a SPST N.O. type for a closed circuit system. It will fit into a 3/8" drilled hole for recessed mounting. The lead wires are #22 and 25" long.

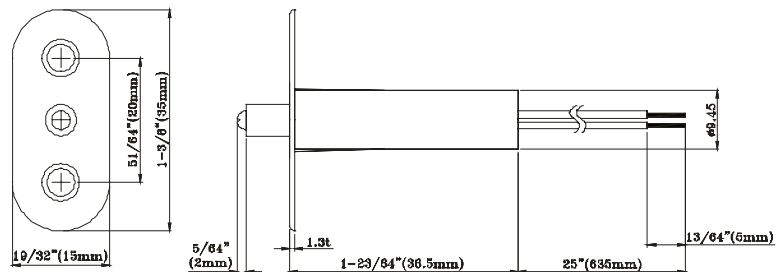

Model Number	Color	Stock Number	Contact	Contact Rating	Contact Type	Max. Carry Current	Max. Switching Current	Breakdown Voltage	Operating Force		
PSW-1	Ivory	4360006	22 AWG 25" lead	10VA	Form A N.O.	1 Amp	.3 Amp	200 VDC	100-200g		
PSW-2	Brown	4360007			Form C N.O./N.C.						
	Gray	4360008									
PSW-21	Ivory	4360009			Form A N.O.					.4 amp	200-300g
	Brown	4360010									
PSW-22	Gray	4360011			Form A N.O.						
	Ivory	4360012									
PSW-22	Ivory	4360013	Form A N.O.								