



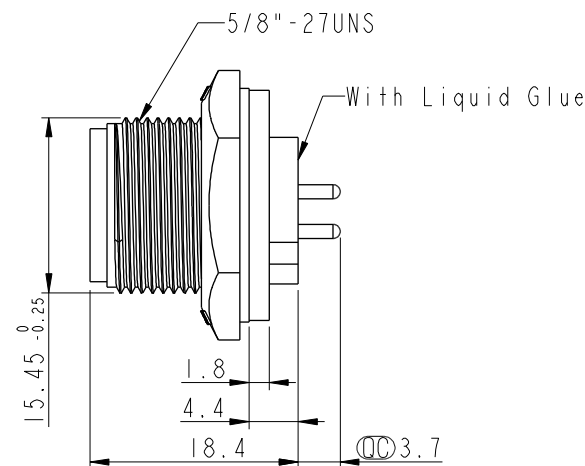
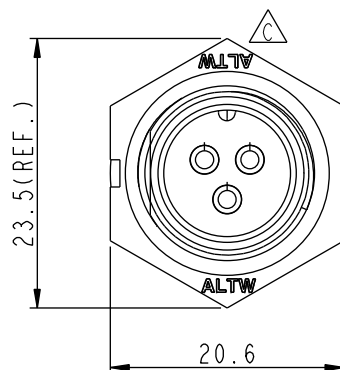




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0475	2008/09/17	Shin	Add Note and Update Drawing to New Format
C	LEN1530184	2014/12/19	Ruru	Change Logo
D	CI90274	2019/02/20	Ruru	Modify Note



Pin Assignments
Front View



Recommended Panel Cut-Out

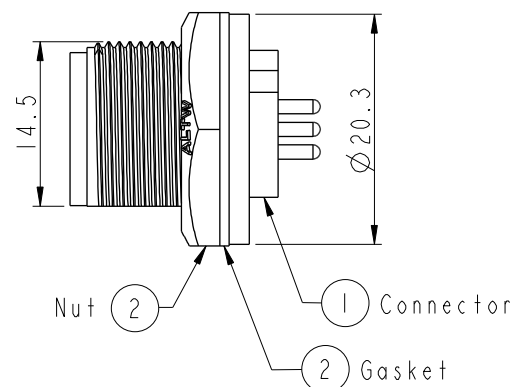

Note:

- * Important Dimensions To Check.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

* Use with Waterproof Cap or Dustcap
Panel Thickness Max: 3.0mm

* Use without Waterproof Cap or Dustcap
Panel Thickness Max: 4.0mm

- * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE
TOLERANCE		Standard, Panel Screw 3Pin M Conn M Pin
.X ±0.25		
.XX ±0.1		
.XXX ±0.05		
ANGLES ±1°		
SCALE	SIZE	SHEET
1:1	A4	1 OF 1
REV.	WC-REV.	QC: Inspection item
D	A.3	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	BB-03PMMP-SC7001	DRAWN BY	Ruru	DATE	2019-02-20
DWG NO	BB-03PMMP-SC7001	CHECKED BY	Rita	DATE	2019-02-20
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-02-20