

“Stay Connected” with



HEYware Products

a PennEngineering® Company



HEYClip™ Wave Locks


Wave Locks - Standard

| BUNDLE DIAMETER RANGE | | PART NO. Natural | DESCRIPTION | OVERALL HEIGHT C | |
|-----------------------|-------------|---------------------|-------------|------------------|------|
| in. | mm. | | | in. | mm. |
| WL Series | | | | | |
| .13 - .15 | 3,2 - 3,8 | 12085 | WL 125 | .48 | 12,2 |
| .16 - .24 | 4,1 - 6,1 | 12086 | WL 200 | .82 | 20,7 |
| .20 - .30 | 5,1 - 7,6 | 12087 | WL 250 | .91 | 23,0 |
| .30 - .40 | 7,6 - 10,2 | 12088 | WL 350 | 1.03 | 26,2 |
| .70 - .80 | 17,8 - 20,3 | 12091 | WL 750 | 1.52 | 38,6 |


NEW!

- Part Description Key: WL XXX, where XXX = Average Bundle Diameter (inches).
- Barreled ends for greater holding power.
- Smooth rounded edges won't cut into cable's insulations - or installer's hand.
- Locking ends twist into place with fingertip pressure.

Standard color natural.



Wave Locks-Standard



Wave Locks-Arrowhead



Wave Locks - Side Entry - Arrowhead Mount

| BUNDLE DIAMETER RANGE | | PART NO. Natural | DESCRIPTION | OVERALL HEIGHT C | |
|---|-------------|---------------------|-------------|------------------|------|
| in. | mm. | | | in. | mm. |
| WL-90 Series For .063" (1,6 mm) thick panels | | | | | |
| .50 - .60 | 12,7 - 15,2 | 12094 | WLS 550-90 | .90 | 22,8 |

Standard color natural. Natural 94V-0 material available, consult Heyco.


- Part Description Key: WLS XXX-90, where XXX = Average Bundle Diameter (inches).
- .187" (4,8 mm) diameter mounting hole.

Wave Locks - Adhesive Back Mount

| MAXIMUM BUNDLE DIAMETER | | PART NO. Natural | DESCRIPTION | PACKAGING | | OVERALL HEIGHT C | |
|-------------------------|-------------|---------------------|-------------|-----------|--------------|------------------|------|
| in. | mm. | | | Std. Pack | Small Pack † | in. | mm. |
| WL-A Series | | | | | | | |
| .30 - .40 | 7,6 - 10,2 | 12096 | WL 350A | 5000 | 25 | 1.10 | 27,9 |
| .40 - .50 | 10,2 - 12,7 | 12097 | WL 450A | 5000 | 25 | 1.26 | 32,0 |
| .70 - .80 | 17,8 - 20,3 | 12098 | WL 750A | 5000 | 25 | 1.61 | 40,9 |

Standard color natural.

† To order Small Packs, please add the suffix -P to Part No.; e.g., 12096-P.

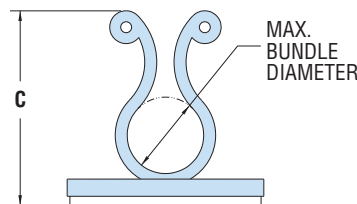

Wave Locks-Adhesive

- Part Description Key: WL XXXA, where XXX = Average Bundle Diameter (inches).



| | |
|---------------------|-------------------------|
| Material | Nylon 6/6 |
| Flammability Rating | 94V-2 |
| Temperature Range | 32°F (0°C) 185°F (85°C) |

Quick Specs