

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -







ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL	19SEP2017	YC	CW


- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 1000V
RATED CURRENT: 100A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 8KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 10.0mm²~35.0mm²
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20500010XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 1000V
额定电流: 100A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 8KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 10.0mm²~35.0mm²
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20500010XX000)

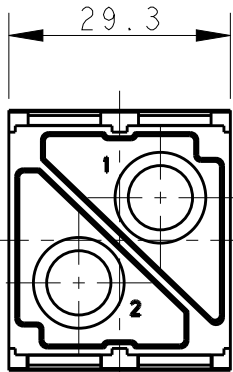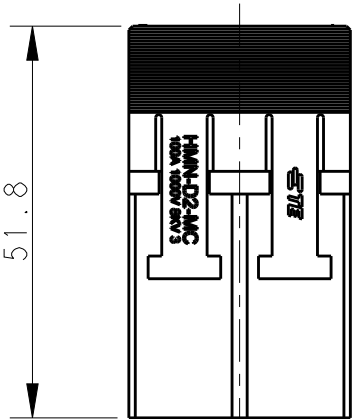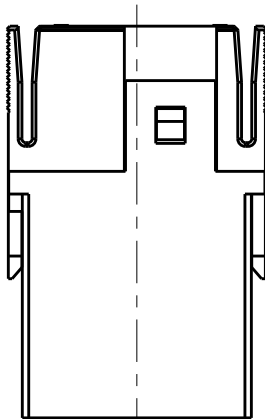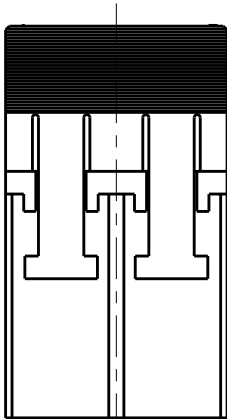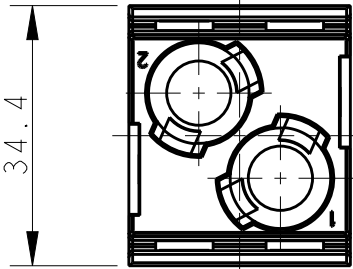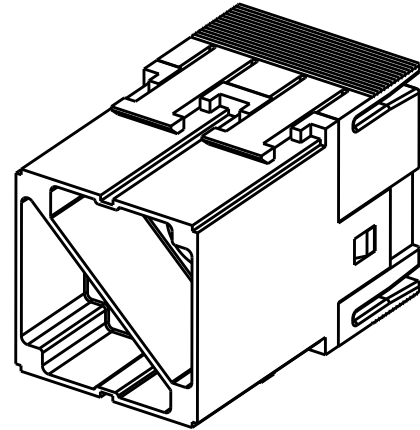

T2111028101-007	HMN-D2-MC	HMN-D2 MALE MODULE INSERT HMN-D2 模块公插
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 19SEP2017 YORK CHEN	 TE Connectivity		
		CHK 19SEP2017 GINO YAO			
		APVD 19SEP2017 CHRIS WANG	NAME HMN-D2-MC		
		PRODUCT SPEC 108-137058			
		APPLICATION SPEC 114-137058			
		WEIGHT -	SIZE A3	CAGE CODE 00779	RESTRICTED TO -
		CUSTOMER DRAWING	SCALE 1:1	SHEET 1 OF 1	REV B

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 PLC	±-
		1 PLC	±-
		2 PLC	±-
		3 PLC	±-
		4 PLC	±-
		ANGLES	±-
MATERIAL -		FINISH -	