




Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire.

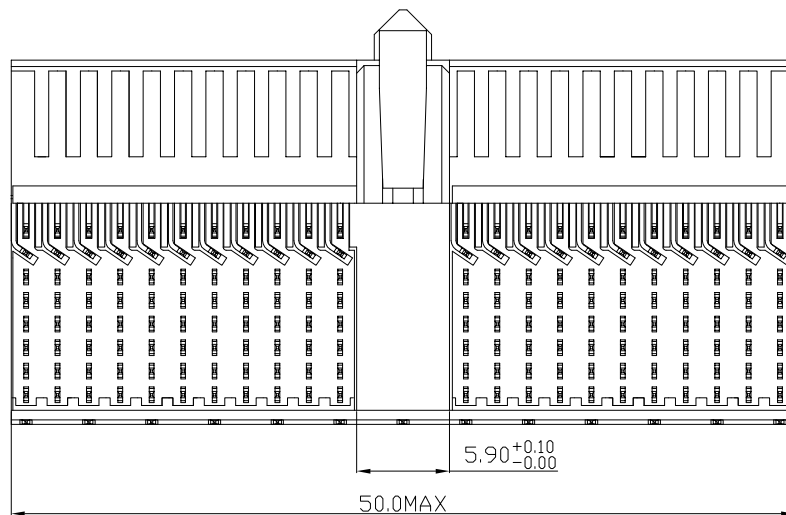

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE : 500 V AC (CONT./CONT)

OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE 20 MΩ MAX

INSERTION FORCE : 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN/CONT

INSULATION RESISTANCE : 10^4 MΩ MIN

NOTES

1.

```
graph TD
    1["1."] --> LF["LEAD FREE INDICATOR 4LF=LEAD FREE"]
    1 --> PL["PERFORMANCE LEVEL INDICATOR  
(REF DWG NO.BSC 201844.003)"]
```

2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.

3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
BSA.201572.001

4. THIS PRODUCT (4F) MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

		www.fciconnect.com				tolerance 1DEC ± 0.2 1DEC 2DEC ± 0.1 2DEC ANGLES $\pm 1^\circ$ HDKEN		projection 		MM 	
Dr	N.OTTO	16-06-99	Product family	MILLIPICS			size	A4	Scale 3/1		
Eng			Spec ref								
Chr			Material						ECN		
Appr											
title MPACS 8+2R RA RCP CONN TYPE D/W.O PEGS/SHIELD						dwg no BS,C ,202260,017			Rev. C		
catalog no HM2R81PA8108----						CUSTOMER			sheet 1 of 1		