


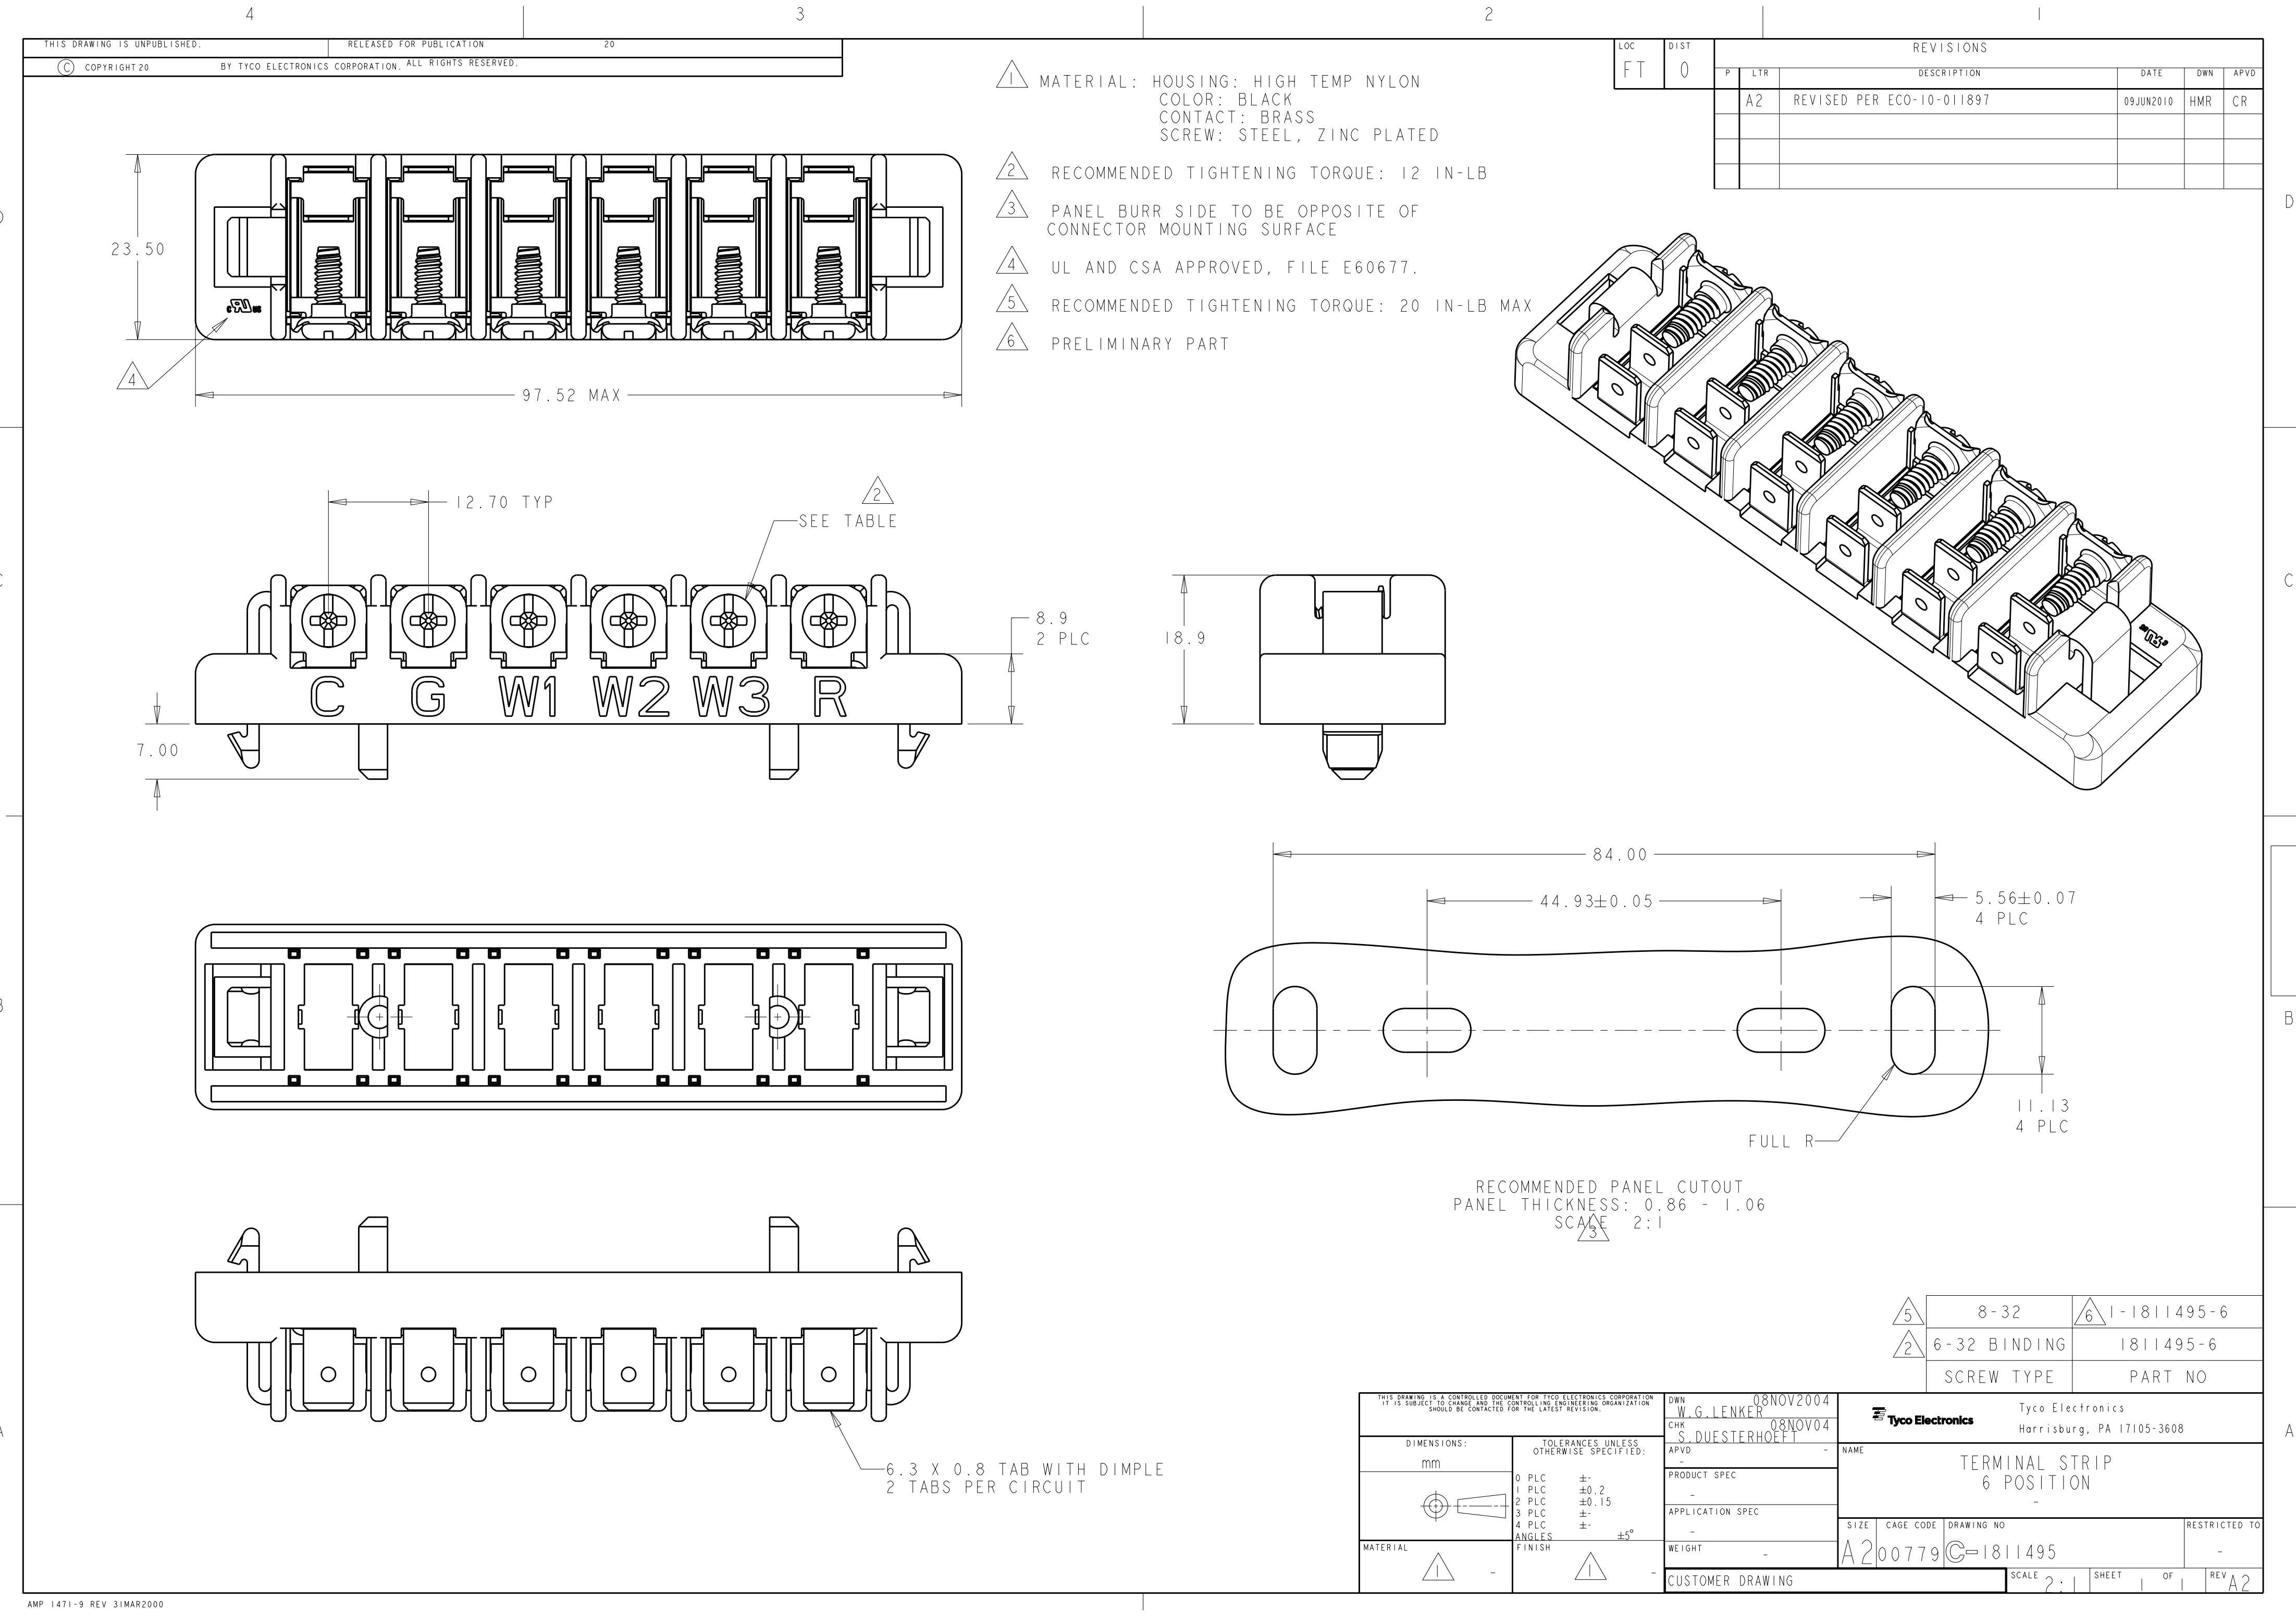

1 MATERIAL: HOUSING: HIGH TEMP NYLON
COLOR: BLACK
CONTACT: BRASS
SCREW: STEEL, ZINC PLATED

2 RECOMMENDED TIGHTENING TORQUE: 12 IN-LB




3 PANEL BURR SIDE TO BE OPPOSITE OF CONNECTOR MOUNTING SURFACE

4 UL AND CSA APPROVED, FILE E60677.

5 RECOMMENDED TIGHTENING TORQUE: 20 IN-LB MAX

6 PRELIMINARY PART

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		A2	REVISED PER ECO-10-011897	09JUN2010	HMR	CR

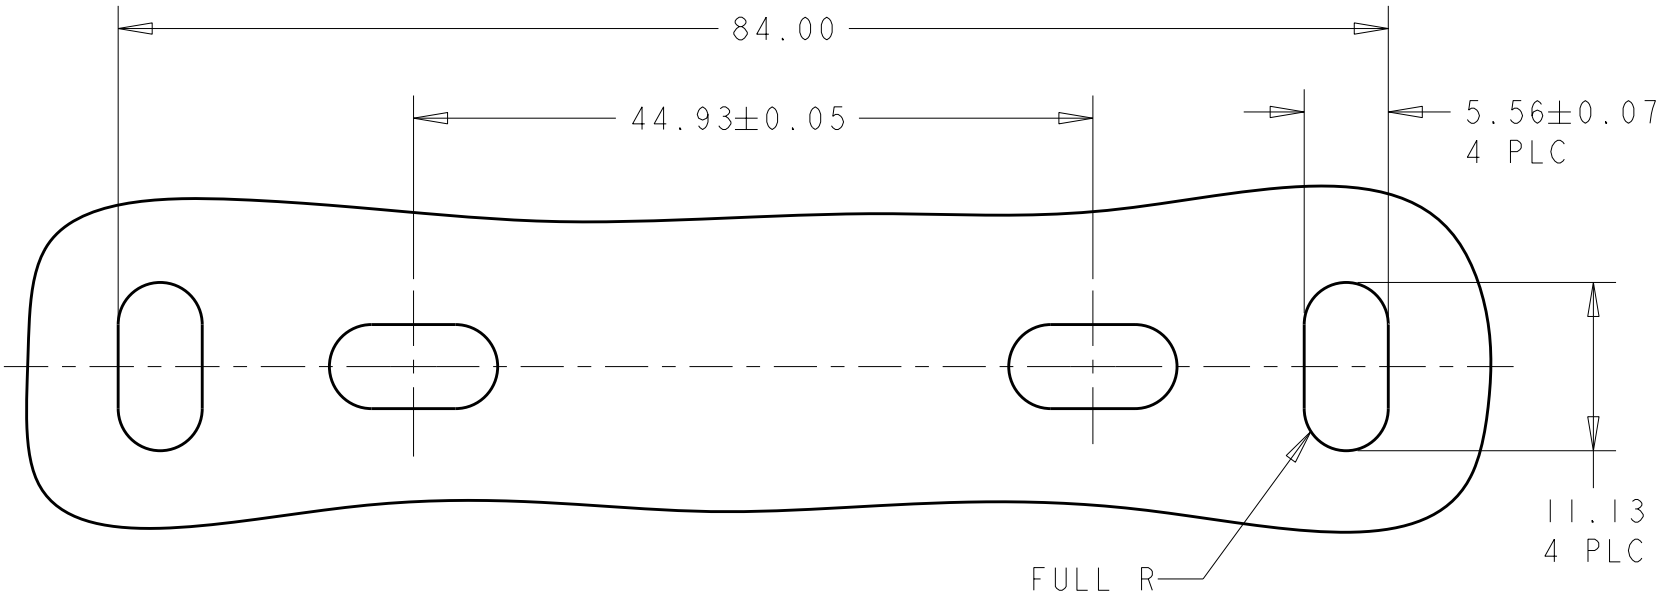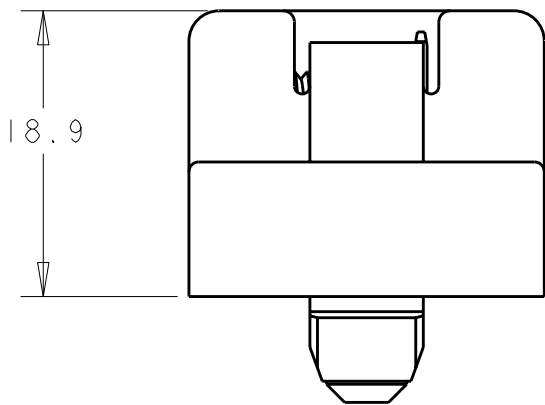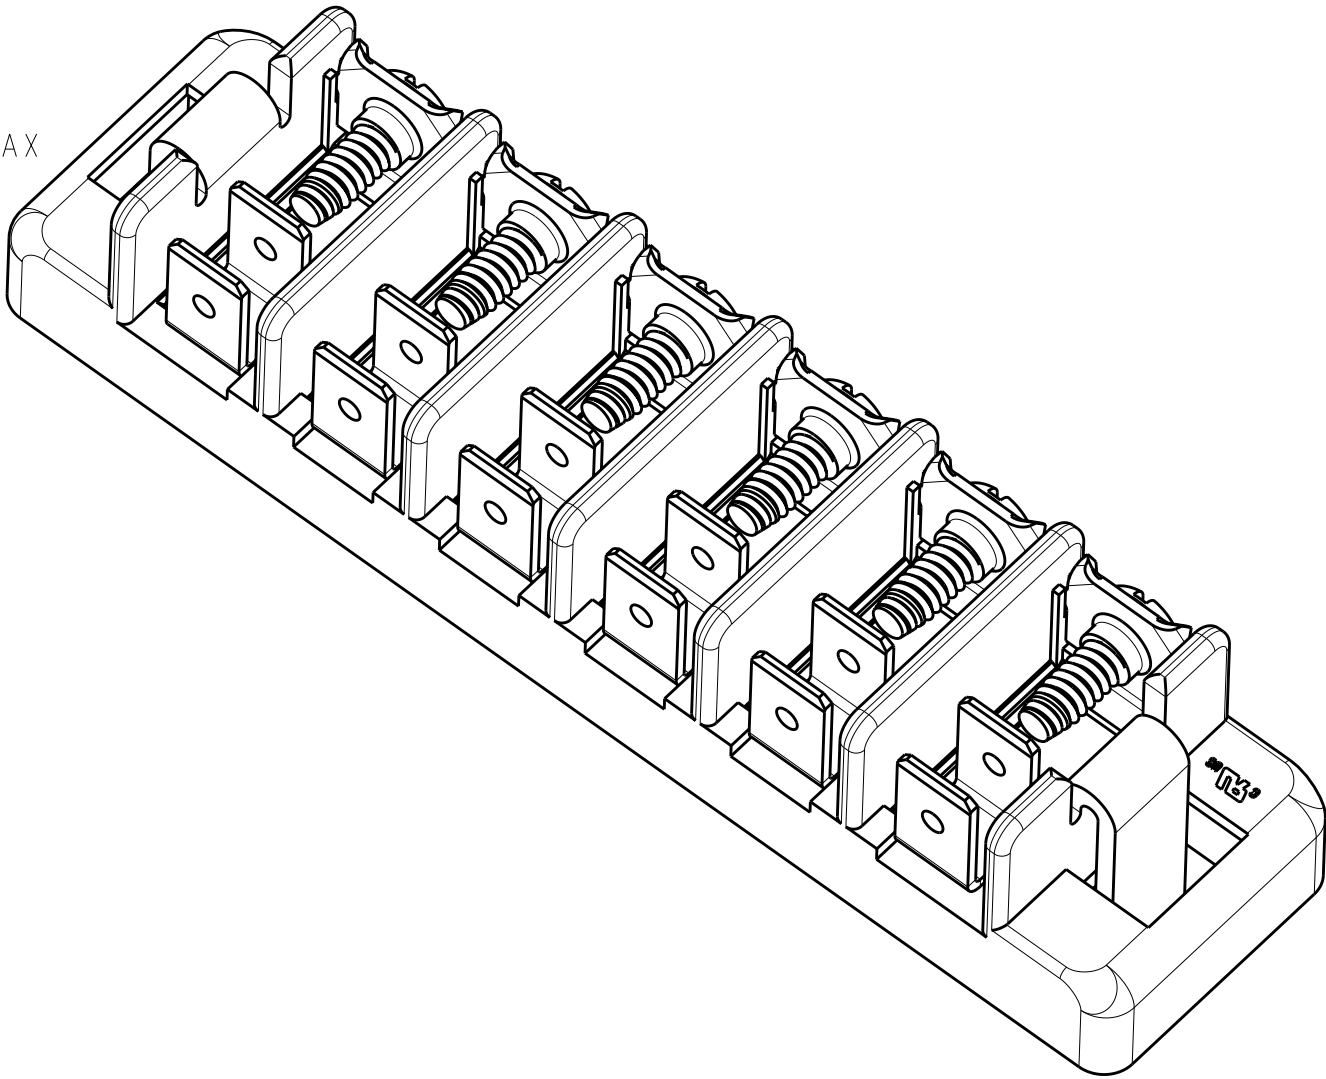

RECOMMENDED PANEL CUTOUT
PANEL THICKNESS: 0.86 - 1.06
SCALE 2:1

5	8-32	6	1-1811495-6
2	6-32 BINDING		1811495-6
	SCREW TYPE		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.				DWN 08NOV2004 W.G.LENKER CHK 08NOV04 S.DUESTERHOEFF APVD - PRODUCT SPEC - APPLICATION SPEC - WEIGHT - CUSTOMER DRAWING				Tyco Electronics Harrisburg, PA 17105-3608 NAME TERMINAL STRIP 6 POSITION - SIZE CAGE CODE DRAWING NO RESTRICTED TO			
DIMENSIONS: mm				TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.2 2 PLC ±0.15 3 PLC ± 4 PLC ± ANGLES ±° FINISH				A200779C-1811495			
MATERIAL				6.3 X 0.8 TAB WITH DIMPLE 2 TABS PER CIRCUIT				SCALE 2:1			
1				1				SHEET 1 OF 1			
								REV A2			