

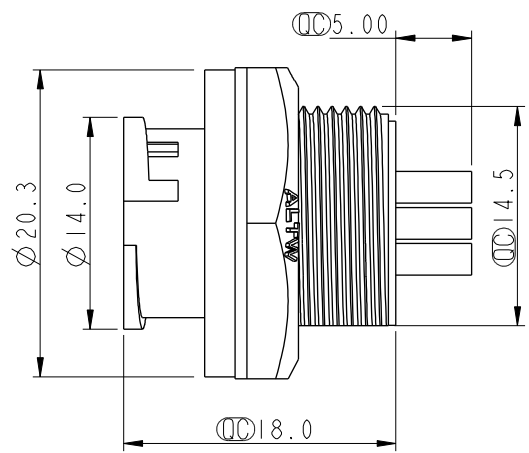
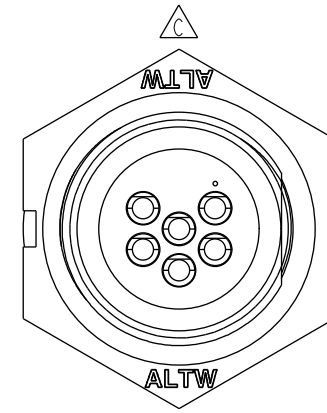
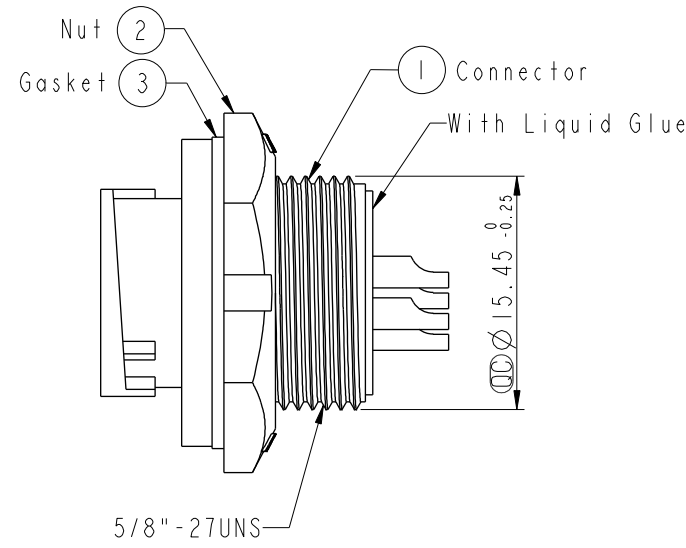
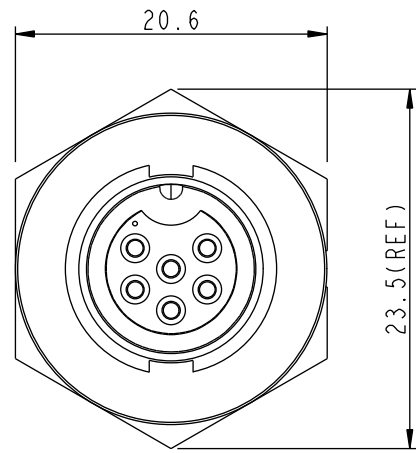


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0582	2008/09/10	Shin	Add Note
C	CI90273	2019/02/23	Ruru	Modify Note & Change Logo



- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.0mm
 - * Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 5.0mm
 - * Gasket and Nut are packed separately in PE bags.



Pin Assignments
Front View

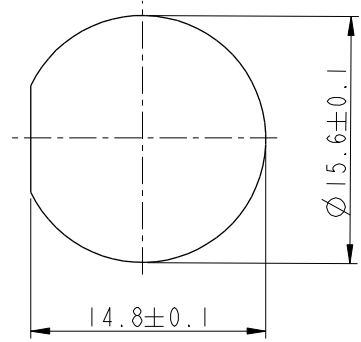

Recommended Panel Cut-out

UNIT:mm				TITLE Standard, Rear Lock 6P M Conn F Pin		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO BD-06RMFS-LC7001		DRAWN BY Ruru		DATE 2019-02-23			
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 2:1		SIZE A4				SHEET 1 OF 1		DWG NO BD-06RMFS-LC7001		CHECKED BY Rita		DATE 2019-02-23	
		REV. C		WC-REV. A.2				CCC: Inspection item		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-02-23	
1		2		3		4		5		6		7		8 W10814-03-0001A2	