

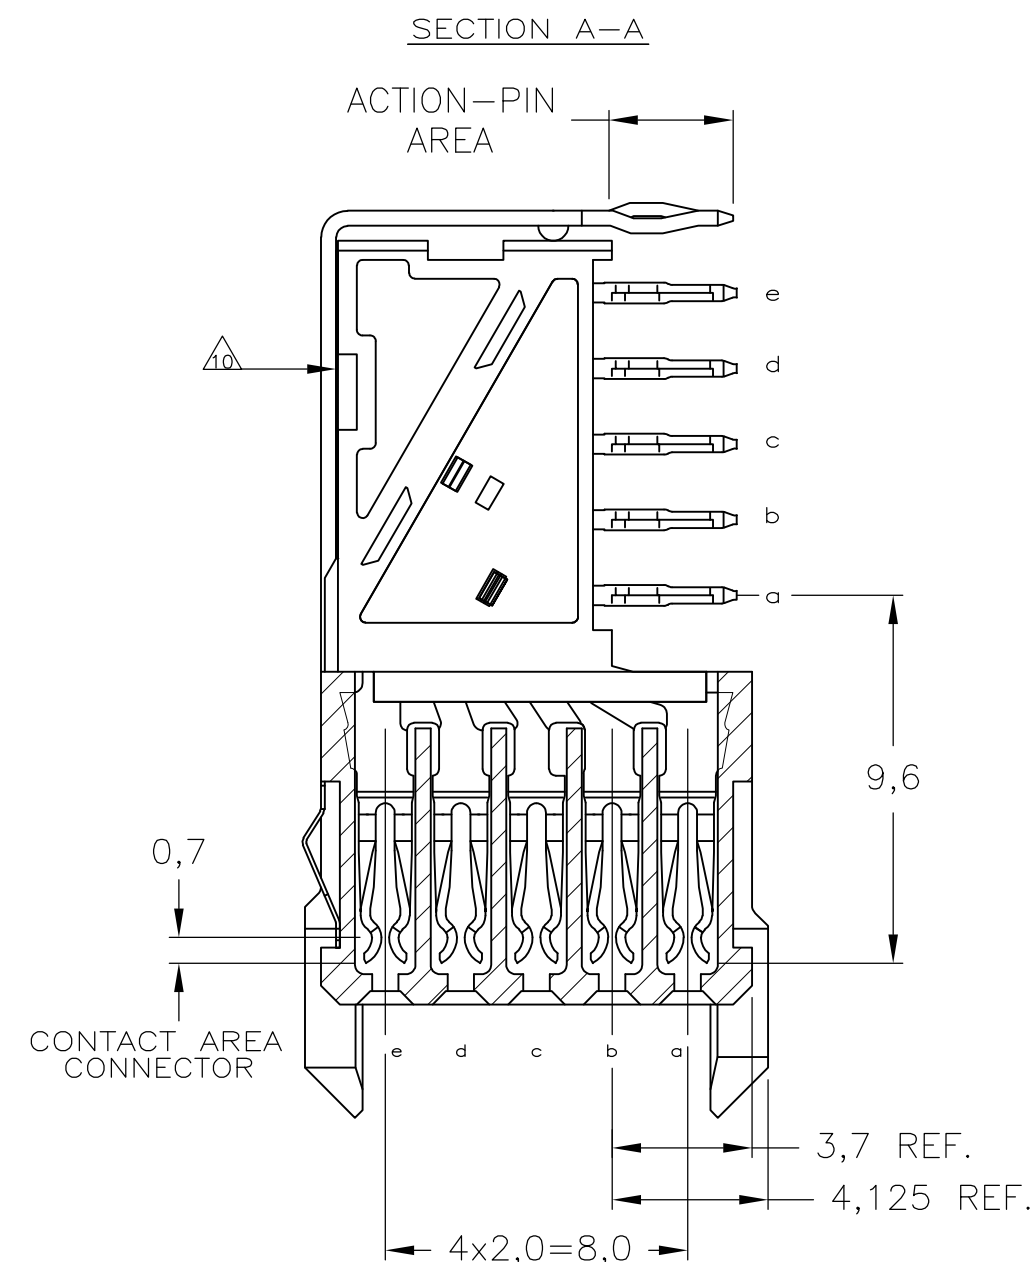
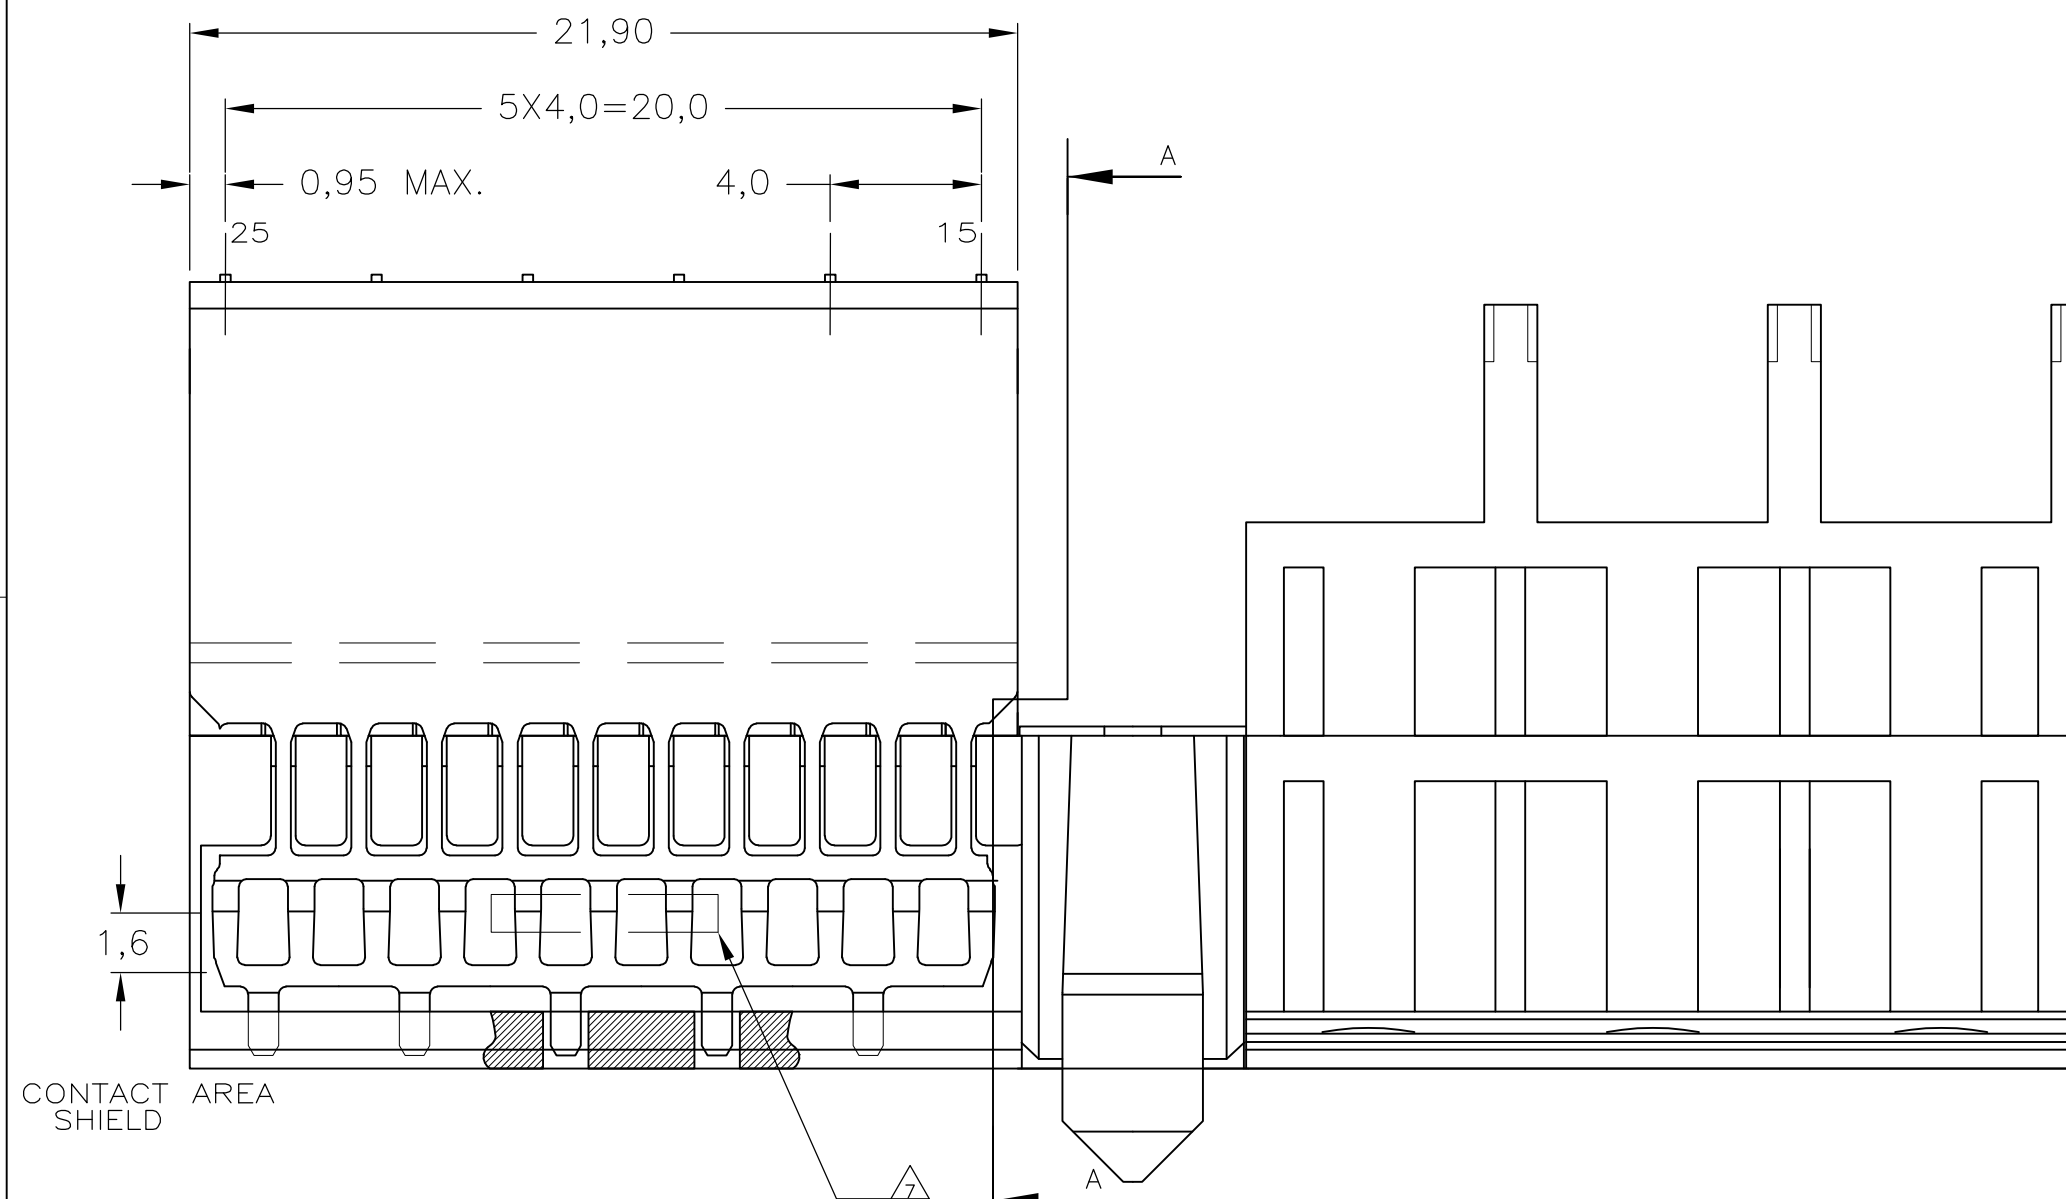
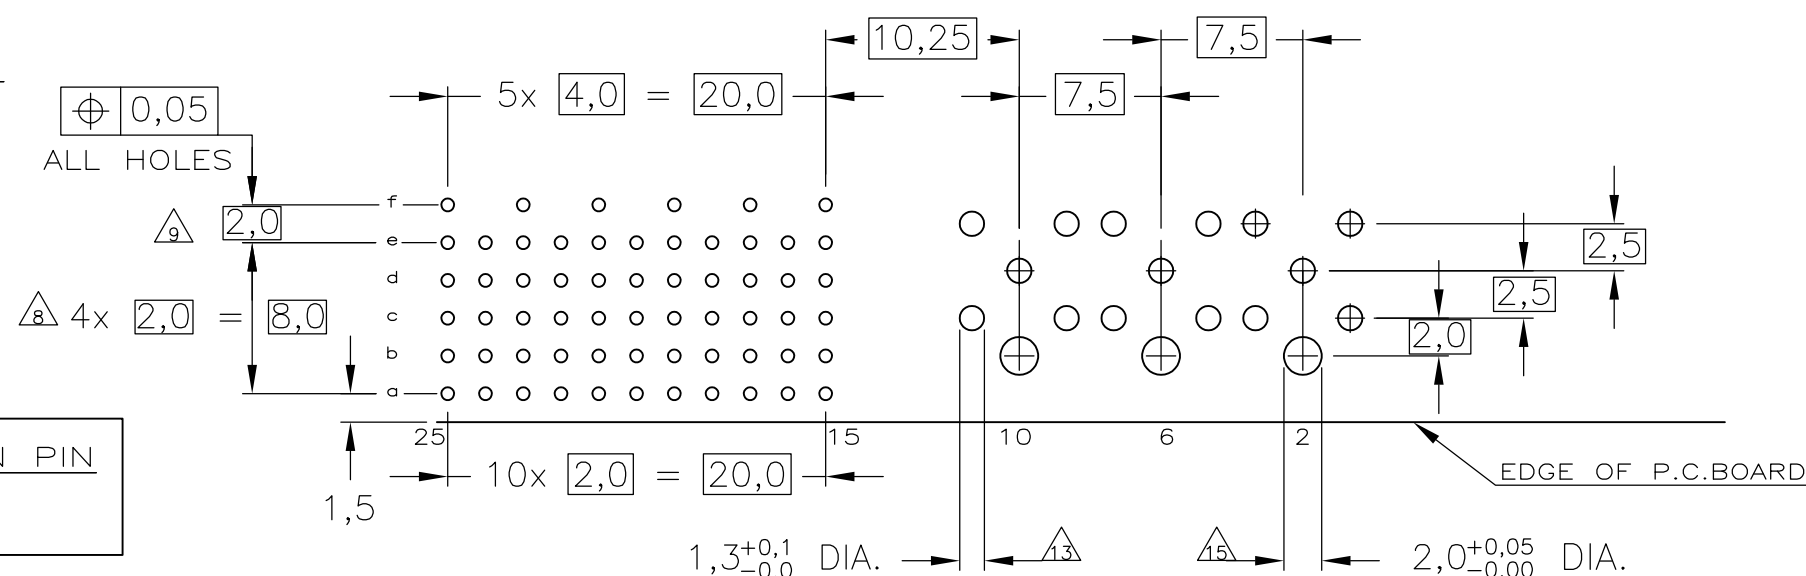



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	ECR-16-013298	02JUN2017	FL	SY

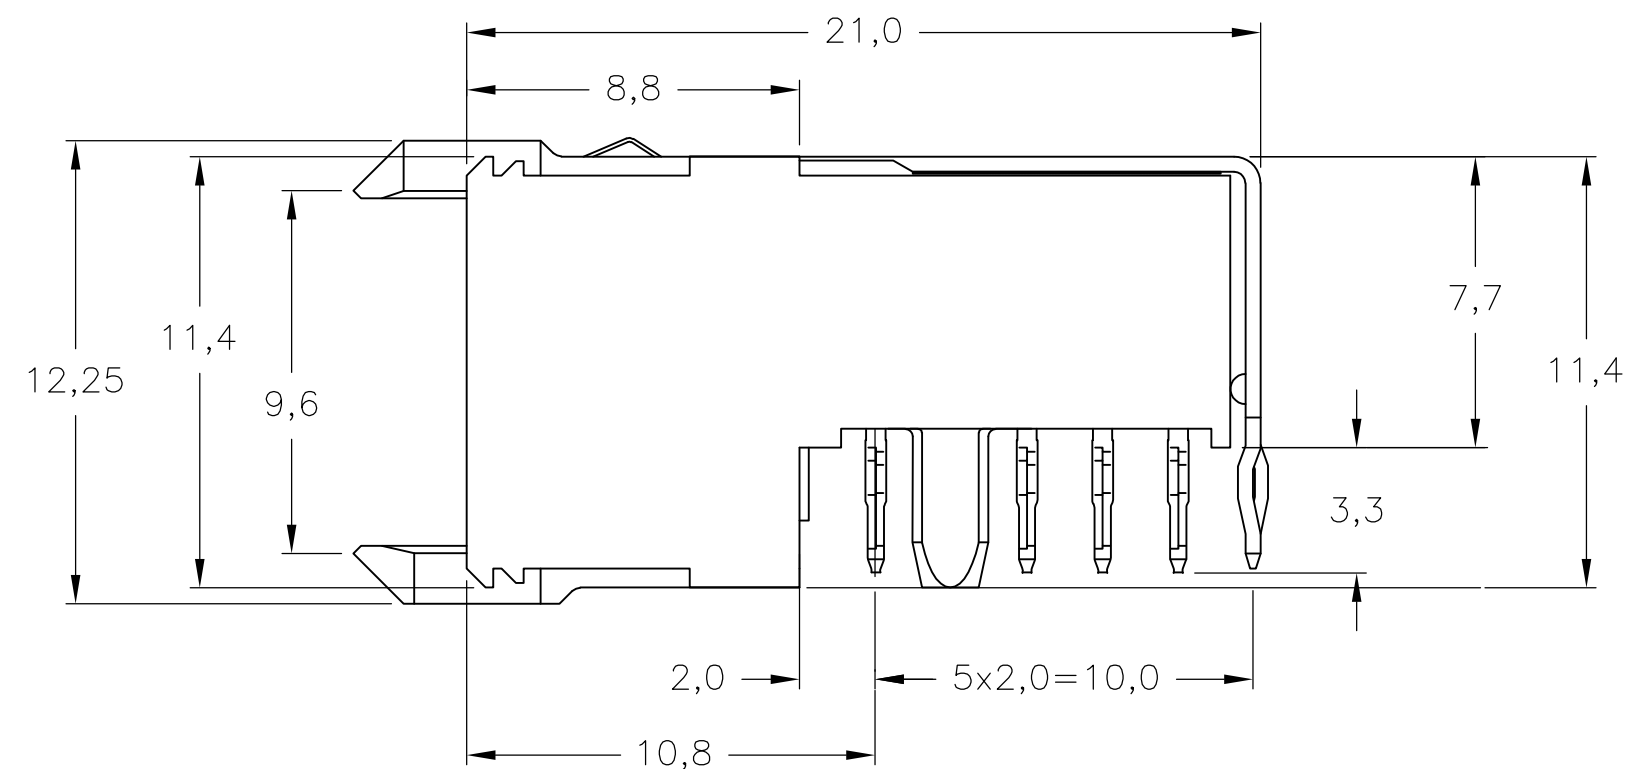


- NOTES:

- △ MATERIAL CONTACTS ; PHOSPHORBRONZE
MATERIAL SHIELDING ; PHOSPHORBRONZE
MATERIAL HOUSING ; GLASSFILLED POLYESTER (GRAY)
UL-RATING 94V0.
 - △ GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1,27μm NICKEL MIN. AND ACTION
PIN: 0,5μm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
 - △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
 - △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
 - △ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
 - △ PLATING SHIELD :
CONTACT AREA : 0,76μm Au MIN.
ACTION PIN : 0,5μm Sn MIN.
REMAINDER : Ni
 - △ ASSEMBLY PRINTED WITH P/N AND DATE CODE
THE MARKING CAN APPEAR ON THE FRONT SIDE
OR BACK SIDE
 - △ HOLE PATTERN FOR FEMALE CONNECTOR TYPE M
55 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - △ ROW "f" 6 PLATED THROUGH HOLES FOR UPERSHIELD
 - △ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
ADHESIVE TAPE OR ADHESIVE
 - △ AREA RESERVED FOR KEYING PART (BASIC P.N. 100526)
 - △ CONTACT CAVITIES (3x) SUITABLE FOR 4,8 DIA. HIGH CURRENT,
HIGH FREQUENCY OR FIBRE OPTIC CONTACTS AS PER DIN 41626
(SEE ALSO NOTE 13).
 - △ 1,3 DIA. PLATED-THROUGH HOLES (15x) CAN BE OMITTED
IF SPECIAL CONTACTS WITH CABLE CONNECTION OR FIBRE
OPTIC CONTACTS ARE USED.
 - △ THIS ROW OF 11 CAVITIES (B1 TO B11) FOR
CONNECTOR ASSEMBLY PURPOSE ONLY.
 - △ NOT PLATED-THROUGH HOLES (3x).

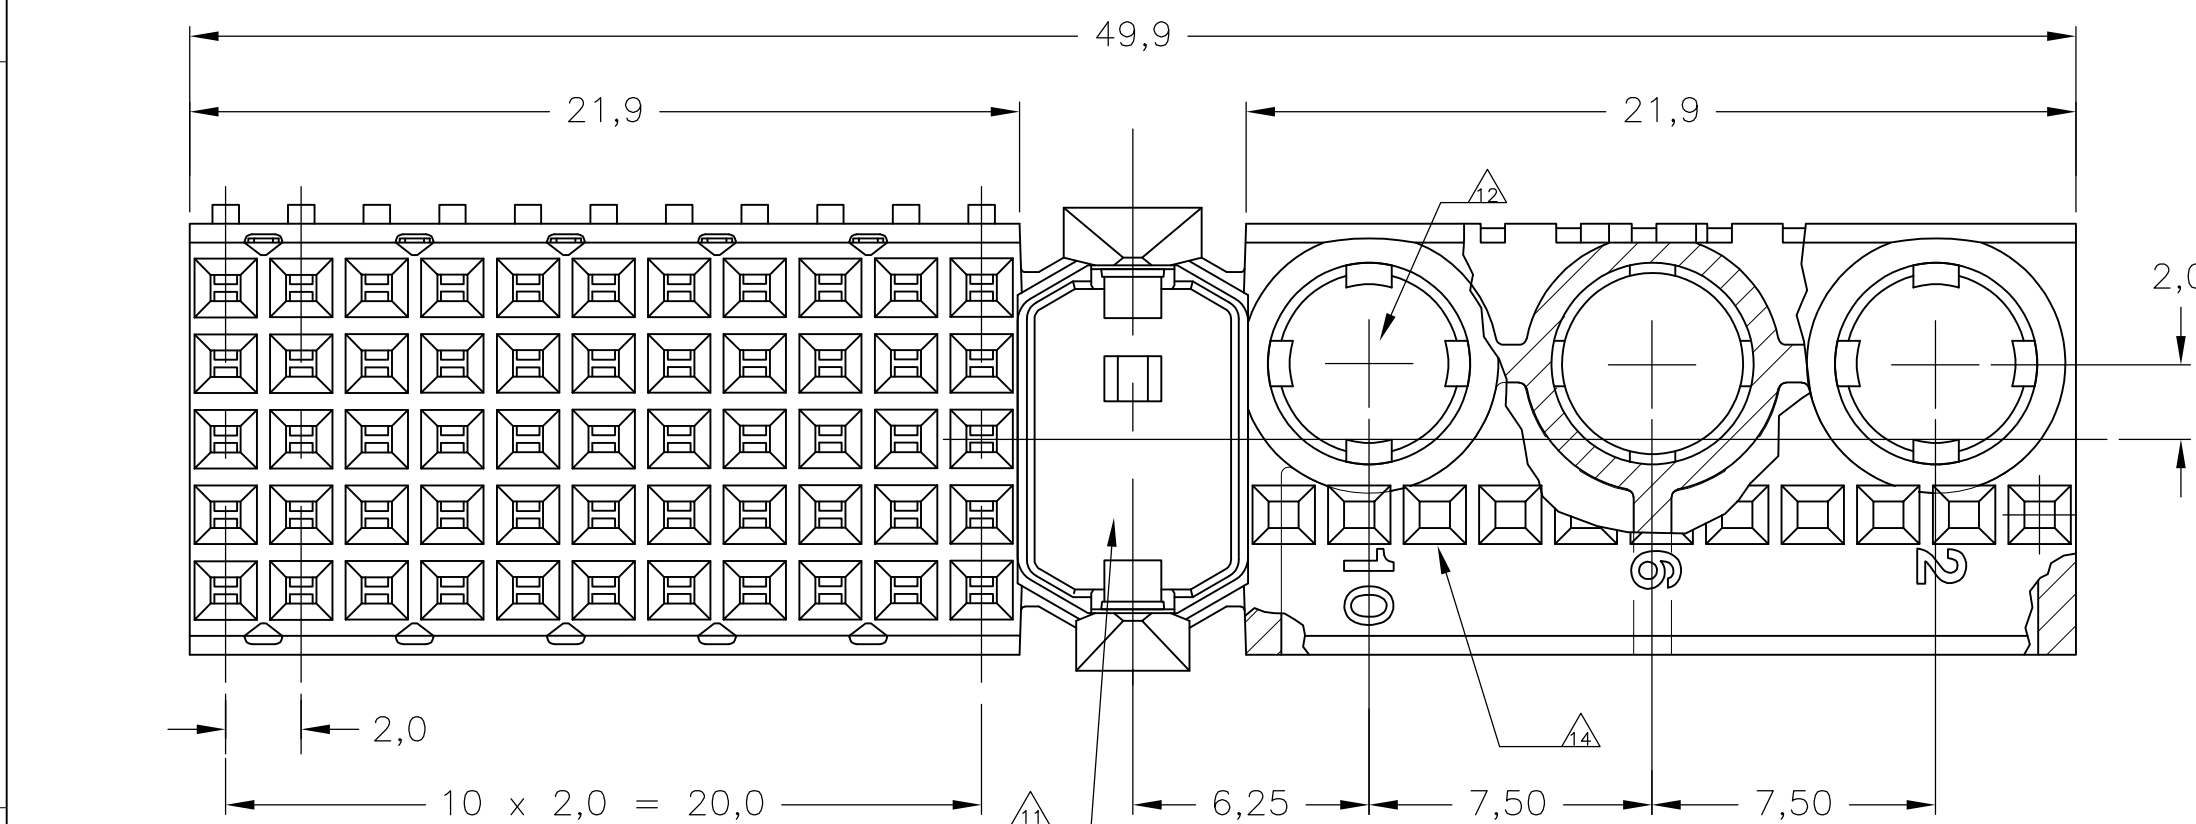

OBSOLETE			5352177-9
			5352177-1
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN 20AUG2004		 TE Connectivity				
		CHK B.MOOIJ 27OCT2004						
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME Z-PACK 2mm HM TYPE M (55 POS.) PRE-SHIELDED RECEPTACLE				
 ±0.2		APVD B.MOOIJ 27OCT2004						
		PRODUCT SPEC 108-19082						
		APPLICATION SPEC 114-19029						
MATERIAL -		FINISH -		SIZE A2	CAGE CODE 00779	DRAWING NO C-5352177	RESTRICTED TO -	
		WEIGHT 0.000000		SCALE 5:1				
		CUSTOMER DRAWING				SHEET 1 of 1		REV D