


Features

- LO & RF 10 TO 2800 MHz
- IF 10 TO 2000 MHz
- LO DRIVE +17 dBm (NOMINAL)
- SURFACE MOUNT
- HIGH INTERCEPT +27 dBm (TYP.)
- +260°C REFLOW COMPATIBLE

Description

The CSM2-17 is a double balanced mixer, designed for use in the high volume wireless applications. The design utilizes Schottky ring quad diodes and broadband baluns to attain excellent performance.

Product Image

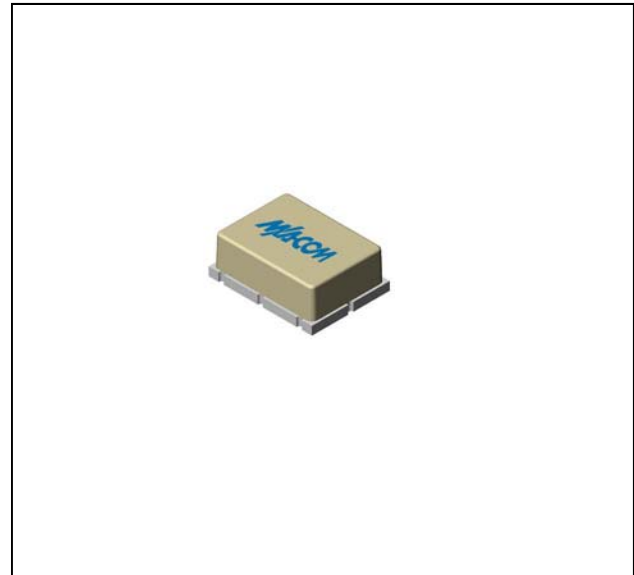

Ordering Information

| Part Number | Package |
|-------------|---------------|
| CSM2-17 | Surface Mount |

Electrical Specifications: $Z_0 = 50\Omega$ $Lo = +17$ dBm (Downconverter application only)

| Parameter | Test Conditions | Units | Typical | Guaranteed | |
|--------------------------|--|-------|--------------------------------|------------|---------------|
| | | | | +25°C | -40° to +85°C |
| SSB Conversion Loss(max) | fR = 10 to 1200 MHz, fL = 10 to 1200 MHz, fi = 10 to 1000 MHz fR = 1200 to 2800 MHz, fL = 1200 to 2800 MHz, fi = 10 to 1500 MHz | dB | 7.5 | 8.5 | 9.0 |
| | | | 8.5 | 9.5 | 10.0 |
| SSB Noise Figure | | dB | Within 1 dB of conversion loss | | |
| L - R Isolation (min) | fL = 10 to 1200 MHz fL = 1200 to 2800 MHz | dB | 35 | 32 | 30 |
| | | | 30 | 28 | 26 |
| L - I Isolation (min) | fL = 10 to 2800 MHz | dB | 27 | 23 | 21 |
| R - I Isolation (min) | fR = 10 to 2800 MHz | dB | 27 | | |
| 1 dB Conversion Comp. | fL = +17 dBm | dBm | +14 | | |
| Input IP3 | fL = 10 to 2000 MHz, fi = 10 to 1000 MHz, fR = 10 to 2000 MHz fL = 2000 to 2800 MHz, fi = 10 to 2000 MHz, fR = 2000 to 2800 MHz | dBm | +27 | | |
| | | | +23 | | |
| R-Port VSWR | fR = 10 to 2800 MHz | | 1.9:1 | | |
| L-Port VSWR | fL = 10 to 1500 MHz fL = 1500 to 2000 MHz | | 2.0:1 | | |
| | | | 2.75:1 | | |
| I-Port VSWR | fi = 10 to 1500 MHz | | 1.5:1 | | |

1







ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.


• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Typical Performance Curves

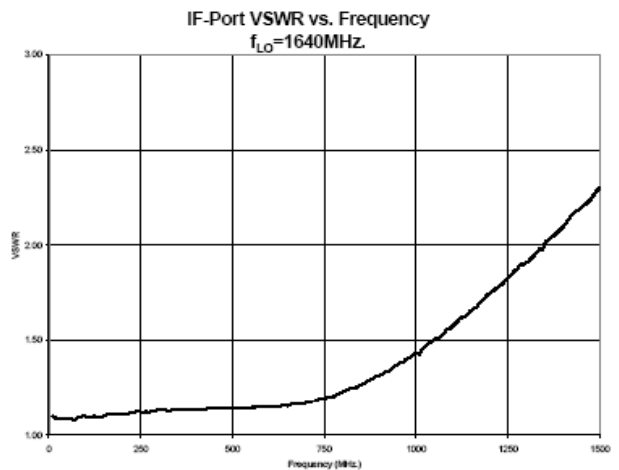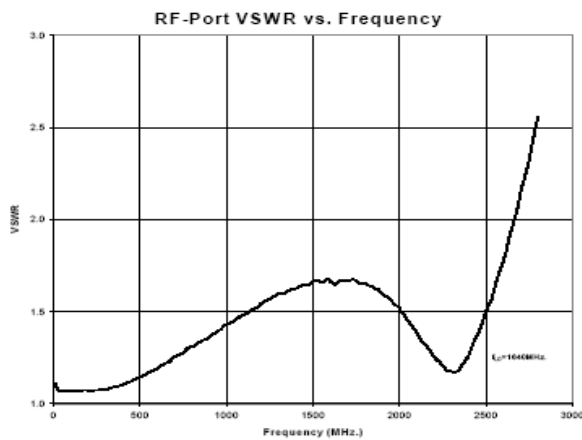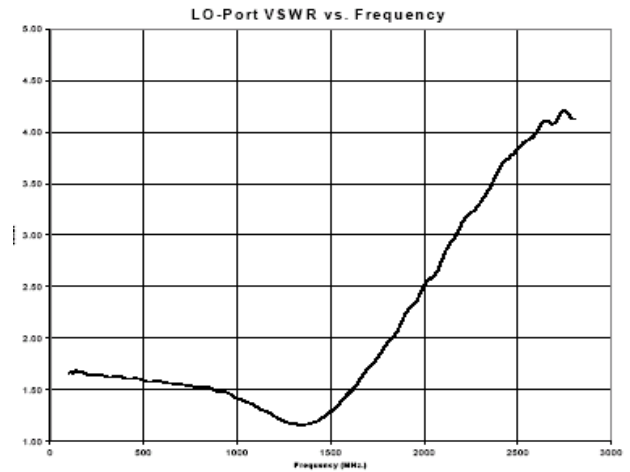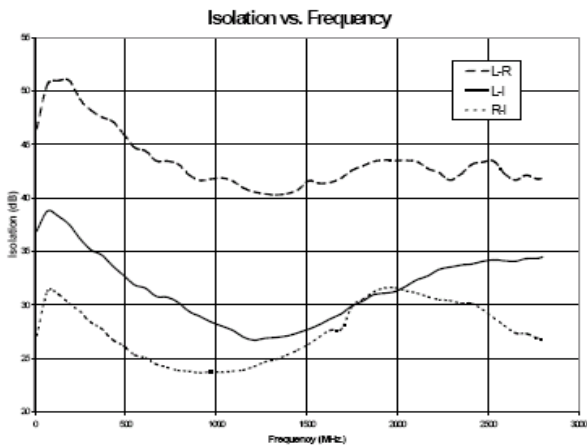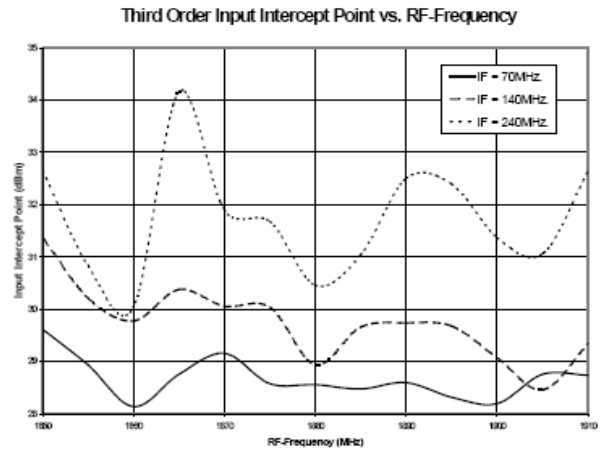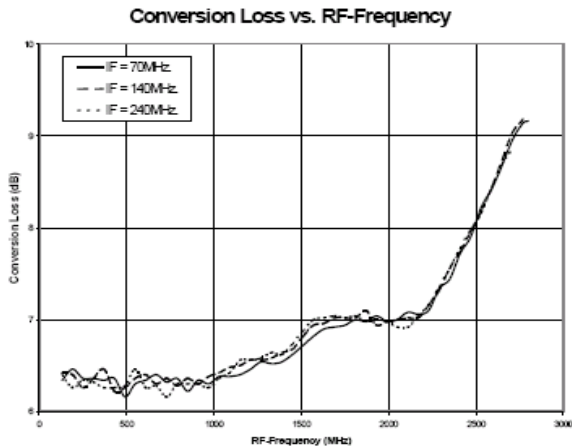

Outline Drawing: Surface Mount *

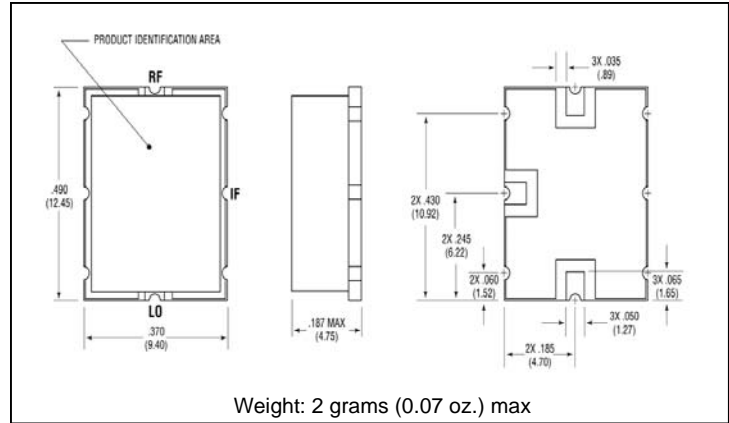

* Dimensions are inches (millimeters) ± 0.015 (0.38) unless otherwise specified.

Absolute Maximum Ratings

| Parameter | Absolute Maximum |
|-----------------------|--|
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -65°C to +100°C |
| Peak Input Power | +20 dBm max @ +25°C +17 dBm max @ +85°C |
| Peak Input Current | 50 mA DC |