



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	K5	OBSOLETE 2--1	ECR-16-003021	16SUG16	KF HY

D

C

B

A

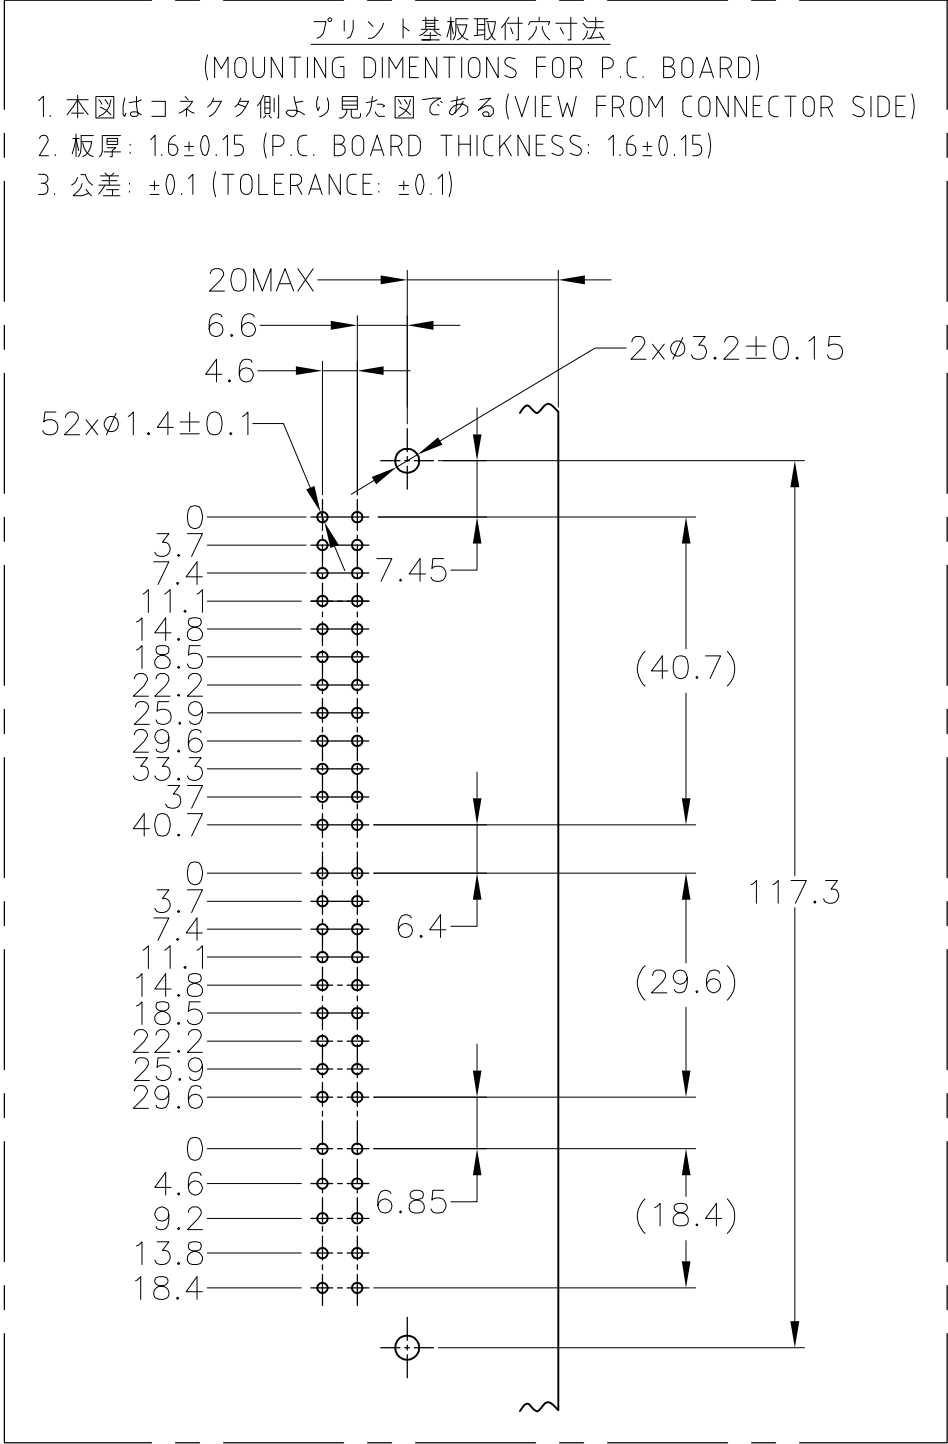
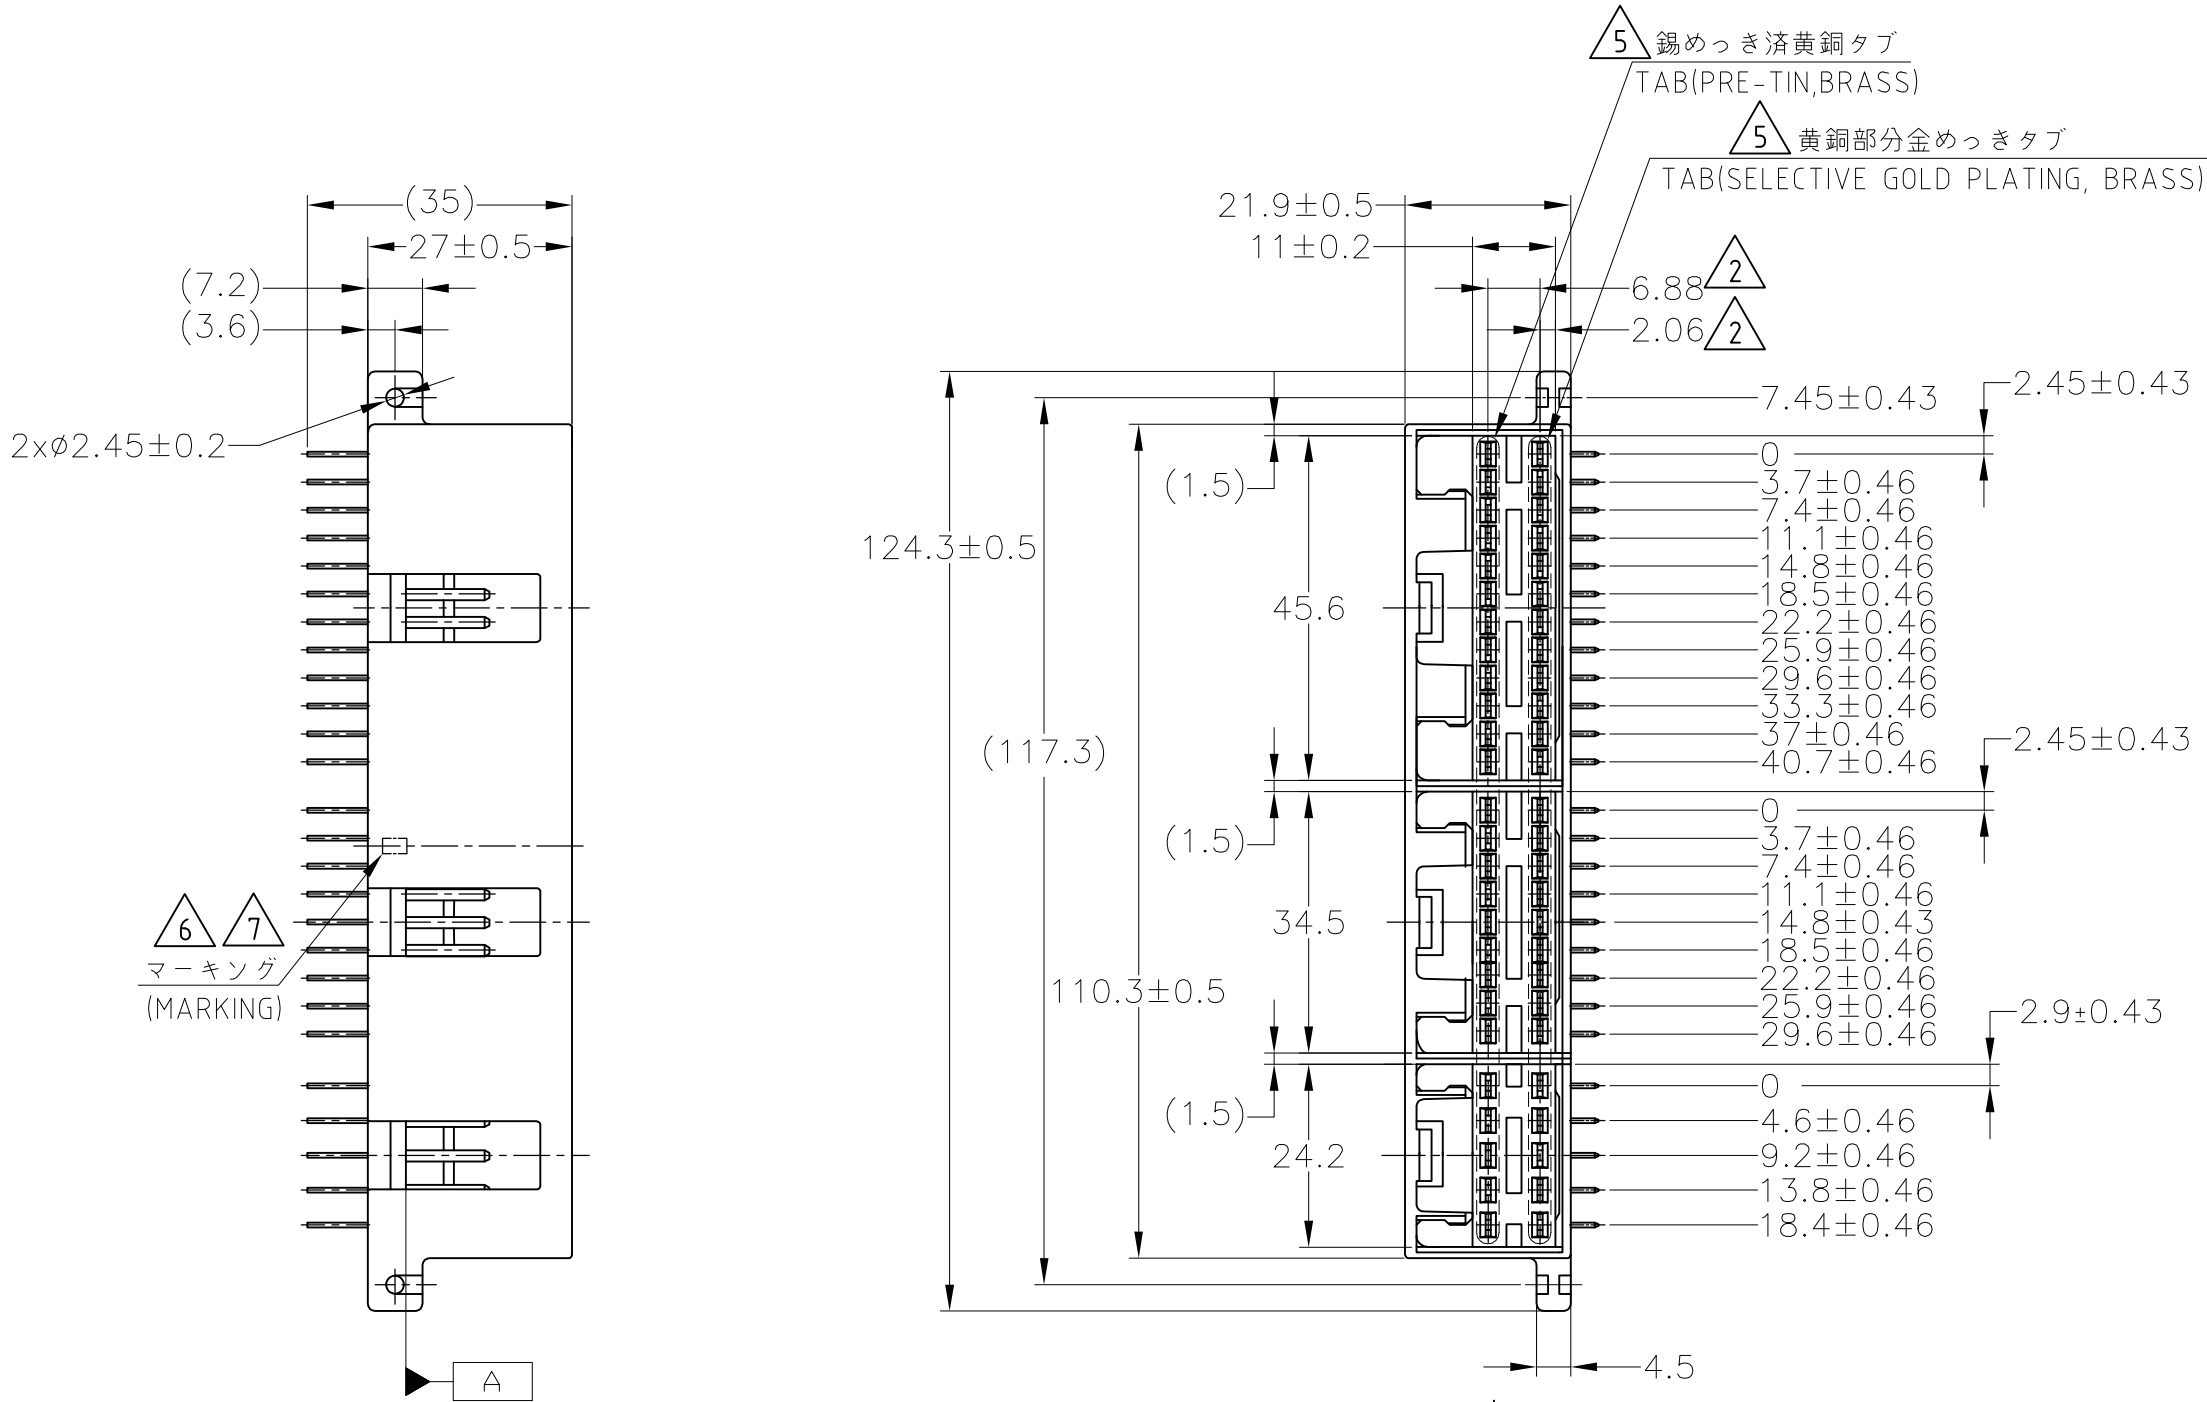


D

C

B

A

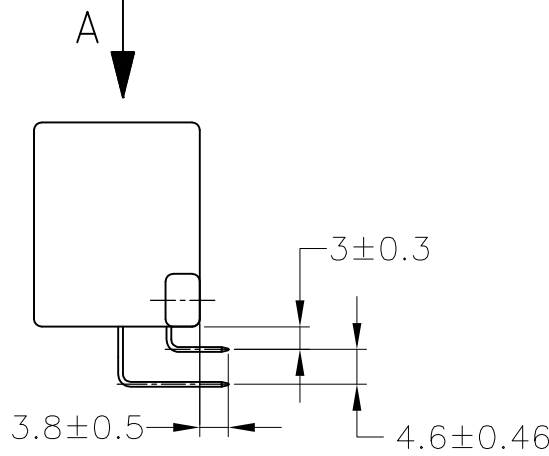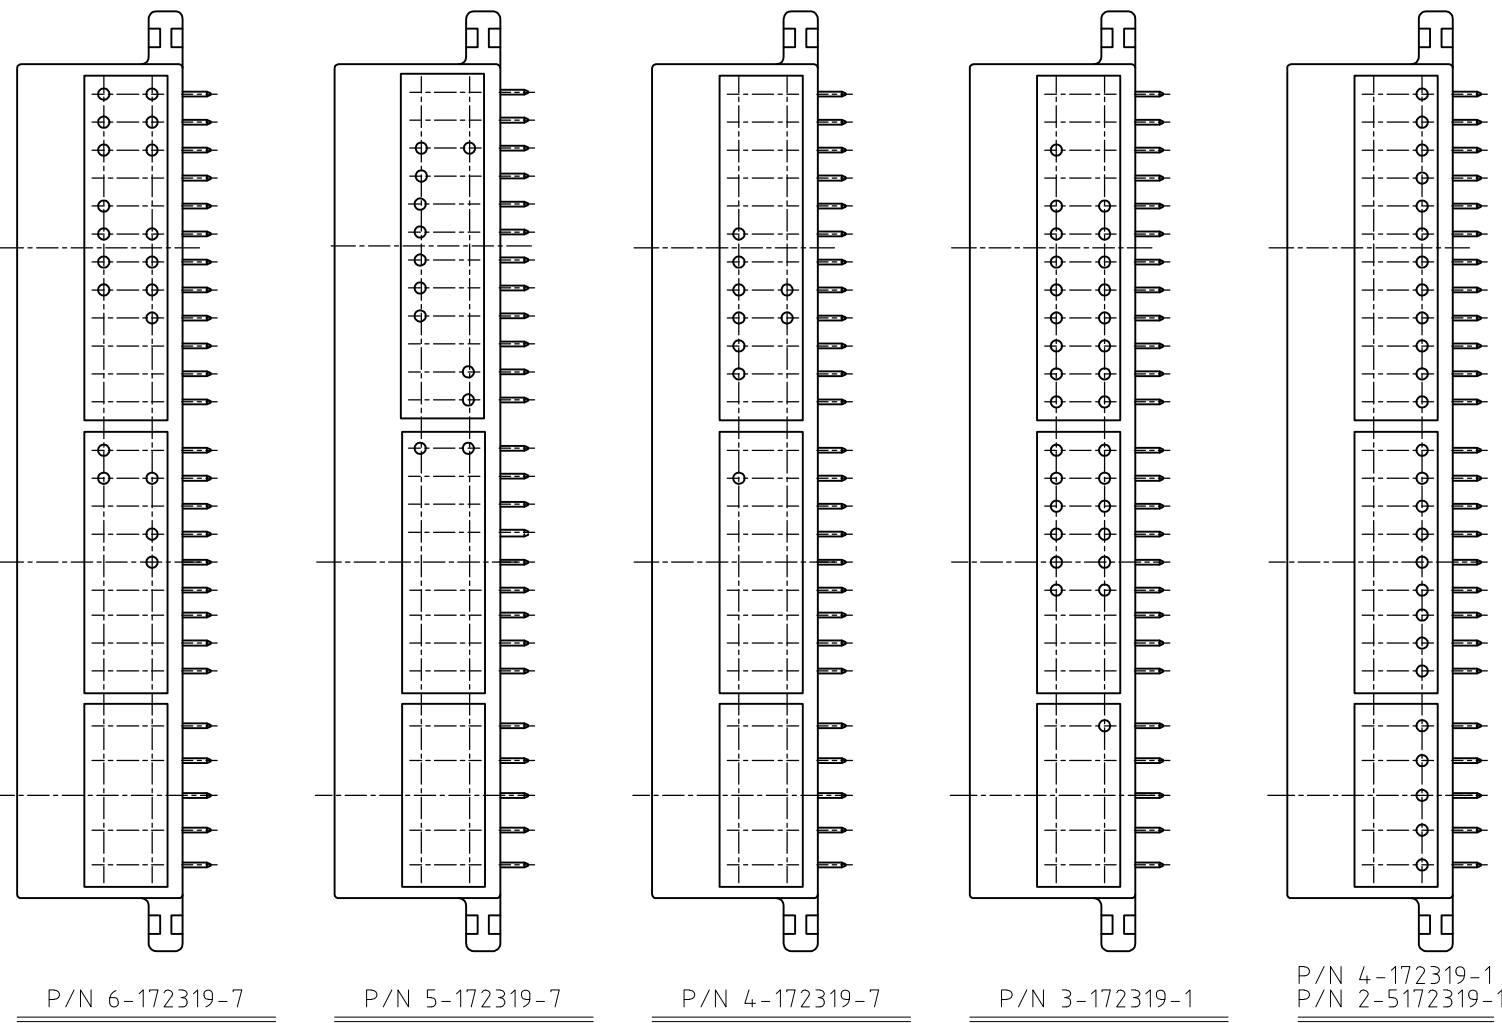

1. THE MATING COUNTERPART
P/N;10Pos 172315. 18Pos 172316. 24Pos 172317
 2. TO BE MEASURED WITHIN 2mm FROM [A]
 3. SELECTIVE GOLD PLATED (CONTACT AREA) TIN LEAD PLATED (SOLDERING AREA) OVER NICKEL PLATED
 4. SOLDERING AFTER MOUNTING P.CBOARD SECURE BY USING M3, PAN HEAD TAPPING SCREW
 5. APPLICABLE PART NUMBERS; 2-172319-1,-7
 6. INDICATED PREFIX AND SUFFIX OF PRODUCT P/N BY HOT STAMP (APPLICABLE P/N 5-172319-7)
 7. CHARACTERS MUST BE CLEAR AND LEGIBLE
- 1 嵌合する相手ハウジング型番; 10極 172315 18極 172316 24極 172317
 - 2 [A] 面より2mmの範囲で測定のこと
 - 3 全面ニッケルメッキ上に部分メッキ(嵌合部)及び半田メッキ(半田付部)
 - 4 プリント基板への取付けは M3のタッピンネジ(JIS B1115 1種)で締付けた後半田付けをする
 - 5 2-172319-1,-7のみに適用
 - 6 製品型番のブリフィックスをカラーホットマーキングにより表示する(適用型番5-172319-7)
 - 7 文字は明瞭であること

OBSOLETE	SELECTIVE TIN (MATTE)	SELECTIVE GOLD x 26 PRE-TIN x 26	YELLOW 黄色	2-5172319-1
	SELECTIVE TIN (MATTE)	SELECTIVE GOLD x 52	YELLOW 黄色	1-5172319-7
	SELECTIVE TIN (MATTE)	SELECTIVE GOLD x 52	GRAY 灰色	1-5172319-6
	TIN-LEAD x 52		YELLOW 黄色	8-172319-7
OBSOLETE	TIN-LEAD	SELECTIVE GOLD x 19 PRE-TIN x 33	YELLOW 黄色	6-172319-7
OBSOLETE	TIN-LEAD	SELECTIVE GOLD x 12 PRE-TIN x 40	YELLOW 黄色	5-172319-7
OBSOLETE	TIN-LEAD	SELECTIVE GOLD x 9 PRE-TIN x 43	YELLOW 黄色	4-172319-7
OBSOLETE	TIN-LEAD	SELECTIVE GOLD x 26 TIN-LEAD x 26	NATURAL 自然色	4-172319-1
	TIN-LEAD	SELECTIVE GOLD x 30 PRE-TIN x 22	NATURAL 自然色	3-172319-1
	TIN-LEAD	SELECTIVE GOLD x 26 PRE-TIN x 26	NATURAL 自然色	2-172319-7
OBSOLETE	TIN-LEAD	SELECTIVE GOLD x 26 PRE-TIN x 26	YELLOW 黄色	2-172319-1
	TIN-LEAD	3 SELECTIVE GOLD x 52	YELLOW 黄色	1-172319-7
	TIN-LEAD	3 SELECTIVE GOLD x 52	GRAY 灰色	1-172319-6
	PRE-TIN x 52		YELLOW 黄色	172319-7
	PRE-TIN x 52		NATURAL 自然色	172319-1
	SOLDERING SIDE 半田付け面	CONTACT SIDE 接触部側	COLOR 色	PART NUMBER 製品型番

A方向から見た金めっき配置図
(LAYOUT OF GOLD PLATING CONTACT VIEW FROM "A" DIRECTION)

⊕ GOLD PLATING CONTACT
(金めっき品)

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	
10±	± 0.2
30±	± 0.25
100±	± 0.3
ANGLE	3°

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.FUJITA	04AUG08
		CHK T.SHINOHARA	04AUG08
		APVD K.BETSUI	04AUG08
DIMENSIONS: 単位: 純 mm		PRODUCT SPEC 製品規格	
		APPLICATION SPEC 取付適用規格	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		WEIGHT	41.5 g
MATERIAL 材料		CUSTOMER DRAWING	
		FINISH 仕上	

TE Connectivity			
52POSITION CAP HOUSING ASSY PULSE LOCK CONNECTOR			
SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A2	00779	C=172319	—
SCALE 尺度 1:1		SHEET 1 of 1	REV K5